Motor Controllers and MCCBs

Series KT7 Motor Circuit Controllers *F2*
- *Series KTA7 Base Units* *F4*
- *Series KTC7 Base Units* *F6*
- *Series KTB7 Base Units* *F8*
- *Series KTV7 Base Units* *F10*
- *Accessories* *F12*
- *KF7 Fuse Holders* *F19*
- *Technical Information & Dimensions (Online)* *F20*

Series KTU7 UL489 Molded Case Circuit Breakers *F47*
- *Accessories* *F49*
- *Technical Information & Dimensions (Online)* *F51*

Ecombo and EcomboPlus Starters *F58*
- *CL8 / CLU8 Ecombo Starters* *F60*
- *CL7 / CLU7 Ecombo Starters* *F62*
- *CK7 / CKU7 EcomboPlus Starters* *F66*
- *CLT7 / CLUT7 Three Component ECombo Starters* *F70*
- *KT7 Assembly - Technical Information & Dimensions (Online)* *F73*

Enclosed Motor Controllers & Circuit Breakers *F88*
- *KT7 Type-E Manual Combination Controller* *F89*
- *Explosion-proof KT7 Motor Controllers* *F93*
- *KTU7 Molded Case Circuit Breakers* *F95*
- *CX7 Ecombo Kwikstarters* *F98*
- *CX7 Combination Controllers* *F105*
- *CX7 Explosion-proof Controllers* *F110*
- *CX7 Type E/F Simplex & Duplex Pump Controllers* *F111*
- *Custom Multi-Starter Control Panels* *F114*
- *Wiring Diagrams & Dimensions (Online)* *F116*

KT4 Manual Motor Starters *(Discontinued)* *F121*
- *Accessories* *F123*
- *Technical Information & Dimensions (Online)* *F127*

Series KT7 Motor Circuit Controllers

Versatile, convenient and space saving… for a variety of applications

Sprecher+Schuh's KT7 series of Motor Circuit Controllers are some of the most versatile and technologically advanced control products available today.

In one small package, KT7s combine the functions of:

- Current limiting short circuit protection
- Class 10 thermal overload protection
- Switching and
- Signaling

These devices can be used in a wide variety of control schemes that reduce panel space, simplify installation and eliminate the need for more expensive equipment.

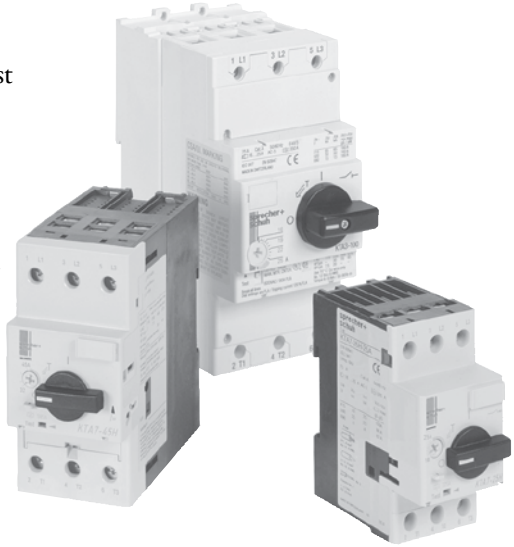

Increased ratings…

Sprecher+Schuh's KT7 controller family offers higher interrupting capacities (KAIC ratings) and improved Type 2 Coordination and Type E (life after short-circuit). The KTA7-25H/32H offers the option of higher short-circuit current ratings (SCCR) than the standard interrupting capacity of the KTA7-25S/32S Motor Controllers. KTA7 is also available in frames up to 45A. KTC7 can be used with High Efficiency motors. KTB7 Magnetic Only controllers can be combined with CA7 contactors and CEP7 overloads to provide additional features. KTV7 series motor controllers are suitable for application at the output of variable frequency drive (VFD) in multi-motor installations.

Designed for multiple applications

UL rules allow KT7 Motor Circuit Controllers to be used in a wide variety of applications including:

- Manual Starter Applications
- Traditional Group Motor Applications with compliance to the Tap Conductor Ratings
- Motor Disconnect Applications
- Self-Protected Manual Combination Starter Applications (Type E)
- Individual Combination Starter Applications (Type E/F)
- Multi-motor Starter Combination Applications (Type E/F)

See our online white paper

Methods of Applying KT7 Motor Circuit Controllers

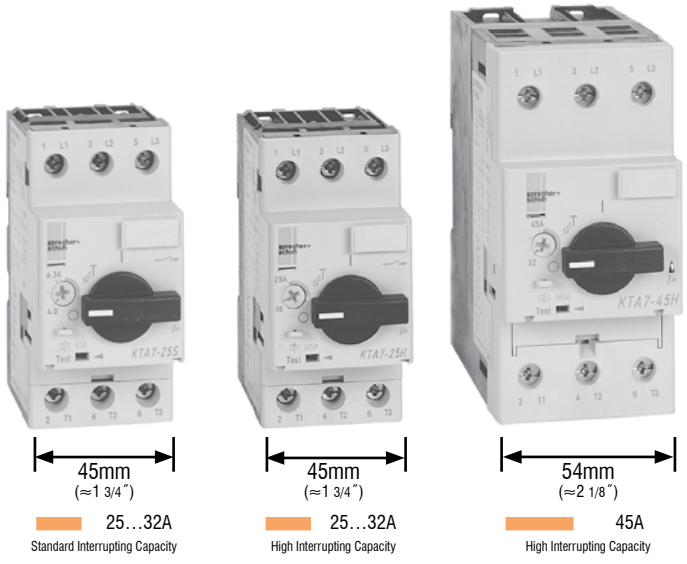

Construction Type E Listing

Advanced current limiting and breaking capacity has allowed KT7s to be UL / CSA listed as self-protected (Construction Type E) manual combination motor controllers. This eliminates the need for an upstream fuse or circuit breaker when using the KT7 as a manual motor starter. In addition, KT7s *also* meet UL requirements for "at-motor disconnects," which means they can be used in an enclosure with a lockable handle as a manual motor starter for individual circuits, and are also an approved means of motor disconnect.

KT7s meet UL requirements for Type E manual motor controllers and "at-motor disconnects"

Type E + Combo starter + Economy = "Ecombo" starter

When the KT7 self-protected manual combination starter is combined with Sprecher + Schuh's CA7 contactor to provide remote operation, we now have an alternative to the classic combination starter. We call these "Ecombo" starters, which save significant dollars and panel space over conventional combo starters. Ecombo starters are available for applications up to 45 Amperes (30 HP @ 460V).

See a complete explanation of Ecombo starters beginning on page F58 of this catalog.

Multi-motor applications… Popular and money saving

Because of the KT7's Construction Type E – UL Rating as a self-protected combination starter, many group motor installations can utilize an even simpler design and less expensive equipment. The result is minimum panel size and maximum flexibility while avoiding cumbersome NEC group motor installation rules.

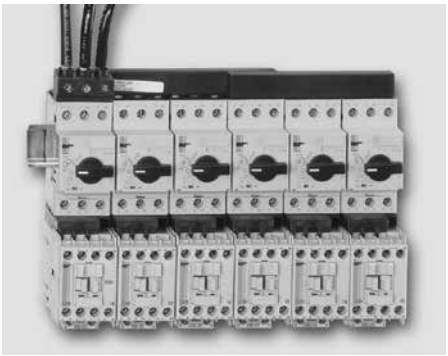

Using KT7s in Multi-Motor Starter applications can replace classic Branch Circuit Protection Devices and reduce panel space up to 60%

Excellent short circuit protection characteristics

In the event of a short-circuit, the contacts are opened by magnetic, non-adjusting tripping elements in times approaching 2/1000 of a second. This results in the extremely rapid buildup of an arc voltage which limits the current of the short-circuit to a very low level. Because of this superb current limiting capability, KTA Motor Circuit Controllers have a short circuit capacity of up to 65kA at 480Y/277V and up to 47kA at 600Y/347V (see illustration below).

Manual Motor Starter Ratings

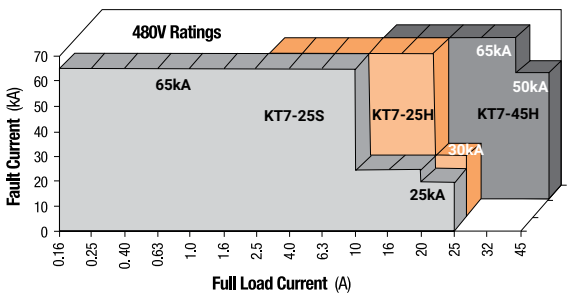

Superb thermal overload protection

Every KT7 device is individually calibrated at the factory for the smallest and largest current it can handle. When coupled with automatic ambient temperature compensation over a range of -25°C to +60°C, very accurate thermal overload protection is obtained. In addition, the KT7 is a Class 10 device… it trips within 10 seconds under locked rotor conditions (6 x FLA). This better protects today's T-Frame motors.

Special units for special applications

KTC7 controllers are available with a fixed magnetic trip set at 16…20x the maximum value of the current adjustment range (as opposed to 13x for the KTA7). This prevents nuisance tripping in applications utilizing high efficiency motors for example. The KTB7 Magnetic Only model is available *without* the thermal trip feature for special applications where a separate motor overload is required.

Other protection features

All KT7 Motor Circuit Controllers provide accelerated tripping under single phase conditions. This is accomplished with a special "differential tripping" mechanism built into each device.

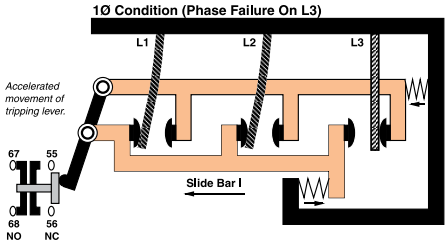

All KT7 Motor Circuit Controllers offer accelerated tripping under single phase conditions

KTA7 Base Unit

Maximum Horsepower						Current Adjustment Range [A]	Magnetic Release Response Current [A]	Catalog Number	Price
Typical Single Phase		Typical Three Phase [HP]							
115V	230V	200V	230V	460V	575V				
KTA7-25…32S — Standard Interrupting Capacity									
~	~	~	~	~	~	0.10...0.16	2.1	**KTA7-25S-0.16A**	**207.30**
~	~	~	~	~	~	0.16...0.25	3.3	**KTA7-25S-0.25A**	**207.30**
~	~	~	~	~	1/4	0.25...0.40	5.2	**KTA7-25S-0.4A**	**207.30**
~	~	~	~	1/4	1/3	0.40...0.63	8.2	**KTA7-25S-0.63A**	**223.88**
~	~	~	~	1/2	3/4	0.63...1.0	13	**KTA7-25S-1A**	**229.07**
~	1/10	1/4	1/3	1	1	1.0...1.6	21	**KTA7-25S-1.6A**	**236.33**
1/10	1/6	1/2	3/4	1-1/2	2	1.6...2.5	33	**KTA7-25S-2.5A**	**244.61**
1/8	1/3	1	1	3	3	2.5...4	52	**KTA7-25S-4A**	**244.61**
1/4	3/4	1-1/2	2	5	5	4...6.3	82	**KTA7-25S-6.3A**	**244.61**
1/2	1-1/2	3	3	7-1/2	10	6.3...10	130	**KTA7-25S-10A**	**261.20**
1	3	5	5	10	15	10...16	208	**KTA7-25S-16A**	**276.74**
1-1/2	3	5	7-1/2	15	20	14.5...20	260	**KTA7-25S-20A**	**297.48**
2	3	7-1/2	7-1/2	20	20	18...25	325	**KTA7-25S-25A**	**315.10**
2	5	7-1/2	10	20	25	24...29	406	**KTA7-32S-29A**	**370.03**
3	5	7-1/2	10	25	30	27...32	448	**KTA7-32S-32A**	**370.03**
KTA7-25…32H — High Interrupting Capacity									
1/10	1/6	1/2	3/4	1-1/2	2	1.6...2.5	33	**KTA7-25H-2.5A**	**298.52**
1/8	1/3	1	1	3	3	2.5...4	52	**KTA7-25H-4A**	**298.52**
1/4	1/2	1-1/2	2	5	5	4...6.3	82	**KTA7-25H-6.3A**	**298.52**
1/2	1-1/2	3	3	7-1/2	10	6.3...10	130	**KTA7-25H-10A**	**318.21**
1	3	5	5	10	15	10...16	208	**KTA7-25H-16A**	**341.01**
1-1/2	3	5	7-1/2	15	20	14.5...20	260	**KTA7-25H-20A**	**354.48**
2	3	7-1/2	7-1/2	20	20	18...25	325	**KTA7-25H-25A**	**383.51**
2	5	7-1/2	10	20	25	24...29	406	**KTA7-32H-29A**	**467.47**
3	5	7-1/2	10	25	30	27...32	448	**KTA7-32H-32A**	**467.47**
KTA7-45H — High Interrupting Capacity									
1/2	1-1/2	3	3	7-1/2	7-1/2	6.3...10	130	**KTA7-45H-10A**	**484.05**
1	3	5	5	10	10	10...16	208	**KTA7-45H-16A**	**484.05**
1-1/2	3	5	7-1/2	15	15	14.5...20	260	**KTA7-45H-20A**	**484.05**
2	3	7-1/2	10	20	20	18...25	325	**KTA7-45H-25A**	**511.00**
3	5	7-1/2	10	25	30	23...32	416	**KTA7-45H-32A**	**558.68**
3	7-1/2	10	15	30	40	32...45	585	**KTA7-45H-45A**	**623.98**

Catalog Number KTA7-25S

Catalog Number KTA7-25H

Catalog Number KTA7-45H

Horsepower ratings shown in the table are for reference only.
The final selection of the controller depends on the actual motor full load current and service factor.

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

KTA7 UL Ratings Application Chart

Device	Manual Motor Starter		Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷❺		Suitable for Tap Conductor Protection		Self-Protected Type E Manual Combination Controller ❸❹❺	
	Max. Short Circuit Current [kA]		Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
	480V	600V		480V	600V	480V	600V	480Y/277V	600Y/347V	480Y/277V	600Y/347V
KTA7-25…32S — Standard Interrupting Capacity											
KTA7-25S-0.16A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-0.25A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-0.4A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-0.63A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-1A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-1.6A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-2.5A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25S-4A	65	25	450	65	25	65	25	65	25	65	25
KTA7-25S-6.3A	65	30	450	65	30	65	30	65	~	65	~
KTA7-25S-10A	65	30	450	65	30	65	30	65	~	65	~
KTA7-25S-16A	30	30	450	30	30	30	30	30	~	30	~
KTA7-25S-20A	30	30	450	30	30	10	10	10	~	10	~
KTA7-25S-25A	25	10	450	25	10	10	5	~	~	~	~
KTA7-32S-29A	25	30	450	25	30	10	~	~	~	~	~
KTA7-32S-32A	25	30	450	25	30	10	~	~	~	~	~
KTA7-25…32H — High Interrupting Capacity											
KTA7-25H-2.5A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-4A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-6.3A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-10A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-16A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-20A	65	30	450	65	30	65	30	65	~	65	~
KTA7-25H-25A	30	30	450	30	30	30	30	30	~	30	~
KTA7-32H-29A	30	30	450	30	30	30	18	~	~	~	~
KTA7-32H-32A	30	30	450	30	30	30	18	~	~	~	~
KTA7-45H — High Interrupting Capacity											
KTA7-45H-10A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-16A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-20A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-25A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-32A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-45A	65	18	600	65	18	65	18	65	~	65	~

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.
❸ UL 508 Part IV.
❹ Type E applications require use of the KT7-xx-TE terminal adaptor on KT7s. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.
❺ Requires lockable twist knob (KT7-KN1 or KT7-KRY1 page F16) or lockable door coupling handle (KT7-HTN or KT7-HTRY page F15).

It should be noted that the KT7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

KTC7 Base Unit ❶

Maximum Horsepower						Current Adjustment Range [A]	Magnetic Release Response Current [A]	Catalog Number	Price
Typical Single Phase		Typical Three Phase [HP]							
115V	230V	200V	230V	460V	575V				
KTC7-25S — Standard Interrupting Capacity									
~	~	~	~	~	~	0.10...0.16	3.2	**KTC7-25S-0.16A**	**216.63**
~	~	~	~	~	~	0.16...0.25	5.2	**KTC7-25S-0.25A**	**216.63**
~	~	~	~	~	1/4	0.25...0.40	8.2	**KTC7-25S-0.4A**	**216.63**
~	~	~	~	1/4	1/3	0.40...0.63	13	**KTC7-25S-0.63A**	**250.83**
~	~	~	~	1/2	3/4	0.63...1.0	21	**KTC7-25S-1A**	**253.95**
~	1/10	1/4	1/3	1	1	1.0...1.6	33	**KTC7-25S-1.6A**	**262.24**
1/10	1/6	1/2	3/4	1-1/2	2	1.6...2.5	52	**KTC7-25S-2.5A**	**267.42**
1/8	1/3	1	1	3	3	2.5...4	82	**KTC7-25S-4A**	**267.42**
1/4	3/4	1-1/2	2	5	5	4...6.3	130	**KTC7-25S-6.3A**	**267.42**
1/2	1-1/2	3	3	7-1/2	10	6.3...10	208	**KTC7-25S-10A**	**282.97**
1	3	5	5	10	15	10...16	260	**KTC7-25S-16A**	**292.29**
KTC7-25H — High Interrupting Capacity									
1	3	5	5	10	10	10...16	260	**KTC7-25H-16A**	**355.53**
1-1/2	3	5	7-1/2	15	20	14.5...20	325	**KTC7-25H-20A**	**373.14**
KTC7-45H — High Interrupting Capacity									
2	3	7-1/2	10	20	25	18...25	416	**KTC7-45H-25A**	**535.87**
3	5	7-1/2	10	25	30	23...32	585	**KTC7-45H-32A**	**585.63**

Horsepower ratings shown in the table are for reference only.
The final selection of the controller depends on the actual motor full load current and service factor.

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTC7-25S-4A.

KTC7-25S

Description

The KTC7 has a fixed magnetic trip set at 16…21x the maximum value of the current adjustment range (as opposed to the KTA7s magnetic trip of approximately 13x current adjustment range). KTC7 are typically used in applications where nuisance tripping might occur, as with some high efficiency motors.

❶ Magnetic trip is fixed at 16…21x the maximum value of the current adjustment range.

KTC7 UL Ratings Application Chart

Device	Manual Motor Starter		Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷❺		Suitable for Tap Conductor Protection		Self-Protected Type E Manual Combination Controller ❸❹❺	
	Max. Short Circuit Current [kA]		Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
	480V	600V		480V	600V	480V	600V	480Y/277V	600Y/347V	480Y/277V	600Y/347V
KTC7-25S — Standard Interrupting Capacity											
KTC7-25S-0.16A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-0.25A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-0.4A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-0.63A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-1A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-1.6A	65	47	450	65	47	65	47	65	30	65	30
KTC7-25S-2.5A	65	25	450	65	25	65	25	65	25	65	25
KTC7-25S-4A	65	30	450	65	30	65	30	65	~	65	~
KTC7-25S-6.3A	65	30	450	65	30	65	30	65	~	65	~
KTC7-25S-10A	30	30	450	30	30	30	30	30	~	30	~
KTC7-25S-16A	30	30	450	30	30	10	10	10	~	10	~
KTC7-25H — High Interrupting Capacity											
KTC7-25H-16A	65	30	450	65	30	65	30	65	30	65	30
KTC7-25H-20A	30	30	450	30	30	30	30	30	~	30	~
KTC7-45H — High Interrupting Capacity											
KTC7-45H-25A	65	30	600	65	30	65	30	65	30	65	30
KTC7-45H-32A	65	30	600	65	18	65	18	65	18	65	18

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.
❸ UL 508 Part IV.
❹ Type E applications require use of the KT7-xx-TE terminal adaptor on KT7s. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.
❺ Requires lockable twist knob (KT7-KN1 or KT7-KRY1 page F16) or lockable door coupling handle (KT7-HTN or KT7-HTRY page F15).

It should be noted that the KT7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

KTB7 Base Unit ❷

Maximum Horsepower						❶ Rated Operational Current [A]	Magnetic Release Response Current [A]	Catalog Number	Price
Typical Single Phase		Typical Three Phase [HP]							
115V	230V	200V	230V	460V	575V				
KTB7-25S — Standard Interrupting Capacity									
~	~	~	~	~	1/4	0.40	5.2	**KTB7-25S-0.4A**	**202.12**
~	~	~	~	1/2	3/4	1.0	13	**KTB7-25S-1A**	**222.85**
1/10	1/6	1/2	3/4	1-1/2	2	2.5	33	**KTB7-25S-2.5A**	**235.28**
KTB7-25…32H — High Interrupting Capacity									
1/10	1/6	1/2	3/4	1-1/2	2	2.5	33	**KTB7-25H-2.5A**	**267.42**
1/8	1/3	1	1	3	3	4	52	**KTB7-25H-4A**	**267.42**
1/2	1-1/2	3	3	7-1/2	10	10	130	**KTB7-25H-10A**	**293.34**
1	3	5	5	10	15	16	208	**KTB7-25H-16A**	**314.07**
2	3	7-1/2	7-1/2	20	20	25	325	**KTB7-25H-25A**	**361.74**
3	5	7-1/2	10	25	30	32	448	**KTB7-32H-32A**	**446.73**
KTB7-45H — High Interrupting Capacity									
2	3	7-1/2	10	20	25	25	325	**KTB7-45H-25A**	**485.09**
3	5	7-1/2	10	25	30	32	416	**KTB7-45H-32A**	**543.13**
3	7-1/2	10	15	30	40	45	585	**KTB7-45H-45A**	**612.58**

KTB7-25S

Description

The KTB7 is designed without a thermal trip element (i.e., current adjustment range). It should be selected for applications where a separate motor overload protection device is used, such as on CLT7 Three Component Starters on page F76. Magnetic trip is the same as the KTA7 (approximately 13x operational current).

❶ APPLICATION NOTE: Product Selection for Heavy Duty Starting Applications using KTB7-25S, KTB7-25H/32H and KTB7-45H Motor Circuit Controllers

The KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-EE_ overload relay with selectable trip class should be used to protect the motor against overload.

In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_e) of the motor FLA must be multiplied by the following factors for selection of the KTB7 Motor Circuit Controller KTB7-25S, KTB7-25H/32H and KTB7-45H.

Trip classes according to UL 508 Section 52 and IEC 60947-4-1
CLASS 10 = 1.00 CLASS 15 = 1.22 CLASS 20 = 1.42
CLASS 25 = 1.58 CLASS 30 = 1.73
The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB7.

Application Example:
Motor 480 VAC, 10 HP, Ie 14 FLA
Heavy duty starting application with start time of up to 18 seconds

Solution:
Starting time up to 18 seconds requires dimensioning for CLASS 20.
- Selection of the Motor Circuit Controller for Short Circuit Protection: Multiply the rated operational current I_e with factor for CLASS 20: $I_e(20)$ = 14 A x 1.42 = 19.9 A
- Select corresponding Sprecher + Schuh KTB7-25S, KTB7-25H/32H or KTB7-45H from catalog using next higher current rating: KTB7-25H-25A

❷ Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – (4.2A x 0.9 = 3.78A). Select Catalog Number KTB7-25S-4A.

KTB7 UL Ratings Application Chart

Device	Manual Motor Starter		Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷	
	Max. Short Circuit Current [kA]		Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
	480V	600V		480V	600V	480V	600V
KTA7-25S — Standard Interrupting Capacity							
KTB7-25S-0.4A	65	47	450	65	47	65	47
KTB7-25S-1A	65	47	450	65	47	65	47
KTB7-25S-2.5A	65	30	450	65	30	65	30
KTA7-25…32H — High Interrupting Capacity							
KTB7-25H-2.5A	65	30	450	65	30	65	30
KTB7-25H-4A	65	30	450	65	30	65	30
KTB7-25H-10A	65	30	450	65	30	65	30
KTB7-25H-16A	65	30	450	65	30	65	30
KTB7-25H-25A	30	30	450	30	30	30	30
KTB7-32H-32A	30	30	450	30	30	30	18
KTA7-45H — High Interrupting Capacity							
KTB7-45H-25A	65	30	600	65	30	65	30
KTB7-45H-32A	65	30	600	65	30	65	30
KTB7-45H-45A	65	18	600	65	18	65	18

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.

KTV7 Base Unit

Rated Operational Current (I_e)	Current Adjustment Range [A]	Nominal Magnetic Trip Current	Maximum Short Circuit Current [kA]		Maximum Horsepower Typical ❶❷ Three Phase [HP]				Catalog Number	Price
[A]	[A]	[A]	480Y/277V Type E	480V (group motor)	200V	230V	460V	575V		
KTV7-25H…32H — High Interrupting Capacity										
1.6	1.0…1.6	82	65	65	1/4	1/3	1	~	**KTV7-25H-1.6A**	**314.07**
2.5	1.6...2.5	82	65	65	1/2	3/4	1-1/2	~	**KTV7-25H-2.5A**	**314.07**
4.0	2.5...4.0	82	65	65	1	1	3	~	**KTV7-25H-4A**	**314.07**
6.3	4.0...6.3	82	65	65	1-1/2	2	5	~	**KTV7-25H-6.3A**	**314.07**
10	6.3...10	130	65	65	3	3	7-1/2	~	**KTV7-25H-10A**	**334.80**
16	10...16	208	65	65	5	5	10	~	**KTV7-25H-16A**	**357.60**
20	14.5...20	260	65	65	5	7-1/2	15	~	**KTV7-25H-20A**	**372.11**
25	18...25	325	30	30	7-1/2	7-1/2	20	~	**KTV7-25H-25A**	**404.24**
29	24...29	406	~	30	7-1/2	10	20	~	**KTV7-32H-29A**	**490.27**
32	27...32	448	~	30	7-1/2	10	25	~	**KTV7-32H-32A**	**490.27**

KTV7-25H

Horsepower ratings shown in the table are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTV7-25H-4A.

Description

The Sprecher+Schuh KTV7 series motor controllers are suitable for two types of applications under cULus listings:

(1) as a Manual, Self-protected Motor Controller or

(2) as a Manual Motor Controller with approval for group installation (and as a motor disconnect)

When UL/CSA listed as a manual, self-protected combination motor controller, the KTV7 provides all of the necessary NEC requirements for protection and control of individual motor branch circuits without additional protective devices (per NEC 430-52C option 6).

When KTV7 devices are applied a manual motor controllers in group installations, then NEC group installation rules state these devices must be applied per the appropriate rules, which require the use of an upstream BCPD-branch circuit protection device (per NEC 430-53C option 2).

The output frequency of the VFD must be limited to 400Hz or less to prevent thermal degradation. Various models of the KTV7 series self-protected combination motor controllers provide disconnection for motor branch circuits, branch-circuit and short-circuit protection (including magnetic protection), overload/thermal protection and manual switching.

The KTV7 self-protected combination motor controllers are current limiting and have a fixed magnetic trip. Interrupt ratings at 400V and 480V are available up to 65KaIC. The VFD output pulse-width modulation frequency must be limited to 4 kilohertz or less. The circuit breakers provide motor overload protection with a trip class 10 characteristic.

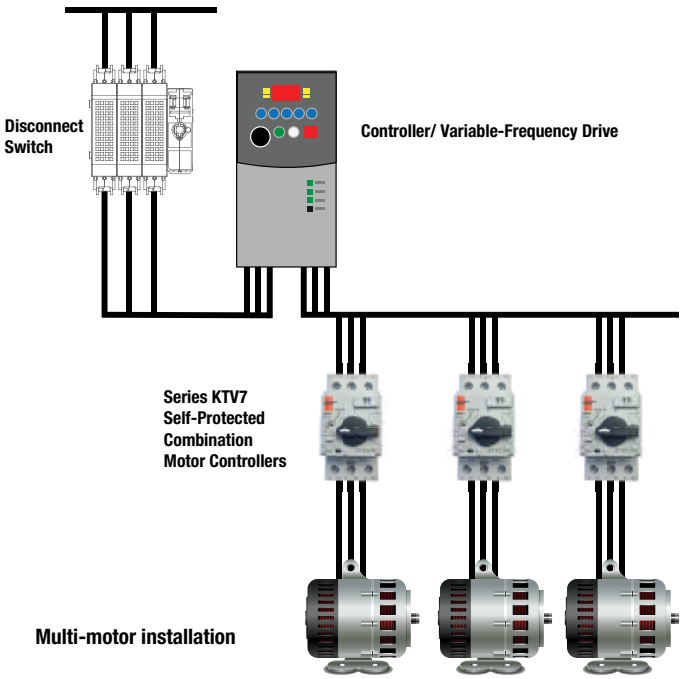

❶ HP ratings shown are for reference. Final selection of MPCB is determined by actual motor full load current.
❷ Not applicable at 575V.

KTV7 UL Ratings Application Chart

Device	Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷❺		Suitable for Tap Conductor Protection		Self-Protected Type E Manual Combination Controller ❸❹❺	
	Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
		480V	600V	480V	600V	480Y/277V	600Y/347V	480Y/277V	600Y/347V
KTV7-25H…32H — High Interrupting Capacity									
KTV7-25H-1.6A	450	65	~	65	~	65	~	65	~
KTV7-25H-2.5A	450	65	~	65	~	65	~	65	~
KTV7-25H-4A	450	65	~	65	~	65	~	65	~
KTV7-25H-6.3A	450	65	~	65	~	65	~	65	~
KTV7-25H-10A	450	65	~	65	~	65	~	65	~
KTV7-25H-16A	450	65	~	65	~	65	~	65	~
KTV7-25H-20A	450	65	~	65	~	65	~	65	~
KTV7-25H-25A	450	30	~	30	~	30	~	30	~
KTV7-32H-29A	450	30	~	30	~	~	~	~	~
KTV7-32H-32A	450	30	~	30	~	~	~	~	~

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.
❸ UL 508 Part IV.
❹ Type E applications require use of the KT7-xx-TE terminal adaptor on KT7s. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.
❺ Requires lockable twist knob (KT7-KN1 or KT7-KRY1 page F16) or lockable door coupling handle (KT7-HTN or KT7-HTRY page F15).

Accessories for KT7

Accessory	Description	Operator Position ❶ OFF	Operator Position ❶ ON	Operator Position ❶ Tripped	Type	Connection Diagram and Terminal Markings ❷	For Use With	Catalog Number	Price
	Front-Mounted Auxiliary Contact • 1-pole or 2-pole • No additional space required • 300V max.	0	X	0	1 NO		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸	**KT7-PE1-10**	**25.08**
		X	0	X	1 NC		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸	**KT7-PE1-01**	**25.08**
		0	X	0	1 NO		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸ KF7	**KT7-PE1-11**	**30.99**
		X	0	X	1 NC				
		0	X	0	1 NO		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸	**KT7-PE1-20**	**30.99**
		0	X	0	1 NO				
		X	0	X	1 NC		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸	**KT7-PE1-02**	**30.99**
		X	0	X	1 NC				
	Right Side-Mounted Auxiliary Contact • 2-pole • Adds 9 mm to the width of the device • 600V max.	0	X	0	1 NO		KTA7 KTB7 KTC7 KTV7	**KT7-PA1-20**	**38.66**
		0	X	0	1 NO				
		X	0	X	1 NC		KTA7 KTB7 KTC7 KTV7	**KT7-PA1-02**	**38.66**
		X	0	X	1 NC				
		0	X	0	1 NO		KTA7 KTB7 KTC7 KTV7	**KT7-PA1-11**	**38.66**
		X	0	X	1 NC				

❶ X=Contact Closed
O=Contact Open

❷ 

❸ When KT7-PE_ is used with KTU7 Circuit Breakers, KT7-PEFC Load Terminal Cover is required to comply with UL489 terminal clearance standards.

Accessories for KT7

Accessory	Description	Operator Position ❶ OFF	Operator Position ❶ ON	Operator Position ❶ Tripped	Type	Connection Diagram and Terminal Markings ❷	For Use With	Catalog Number	Price
	Front-Mounted Trip Contact • 2-pole • Indicates tripping of device • No additional space required • 300V max.	0	X	0	1 NO		KTA7/ KTB7/ KTC7/ KTV7 KTU7 ❸	**KT7-PEF1-S10-N10**	**47.37**
		0	0	X	NO Trip (Short-Circuit & Overload)				
		X	0	X	1 NC		KTA7/ KTB7/ KTC7/ KTV7 KTU7 ❸	**KT7-PEF1-S10-N01**	**47.37**
		0	0	X	NO Trip (Short-Circuit & Overload)				
	Right Side-Mounted Trip Contact • 2-pole • Indicates tripping of motor protector • Adds 9 mm to the width of the device • 600V max.	0	0	X	NO Trip (Short-Circuit & Overload)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-S10-M10**	**64.57**
		0	0	X	NO Trip (Short-Circuit)				
		0	0	X	NO Trip (Short-Circuit & Overload)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-S10-M01**	**64.57**
		X	X	0	NC Trip (Short-Circuit)				
		X	X	0	NC Trip (Short-Circuit & Overload)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-S01/M10**	**64.57**
		0	0	X	NO Trip (Short-Circuit)				
		X	X	0	NC Trip (Short-Circuit & Overload)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-S01-M01**	**64.57**
		X	X	0	NC Trip (Short-Circuit)				
		0	0	X	NO Trip (Short-Circuit)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-M11**	**38.66**
		X	X	0	NC Trip (Short-Circuit)				

❶ X=Contact Closed
O=Contact Open

❷



❸ When KT7-PE_ is used with KTU7 Circuit Breakers, KT7-PEFC Load Terminal Cover is required to comply with UL489 terminal clearance standards.

Accessories for KT7

Accessory	Description	For Use With	AC Coil Voltage 50 HZ	AC Coil Voltage 60 HZ	Catalog Number Shunt Trip	Catalog Number Undervoltage	Price
	Undervoltage Trip • Left-side mounted • Adds 18 mm to the width of the KT7 device • Automatically trips motor protector when voltage falls below 35…70%	KTA7 KTB7 KTC7 KTV7	12V	14V	**KT7-AA-14V**	**KT7-UA-14V**	**103.65**
			21V	24V	**KT7-AA-24V**	**KT7-UA-24V**	
			24V	28V	**KT7-AA-28V**	**KT7-UA-28V**	
			42V	48V	**KT7-AA-48V**	**KT7-UA-48V**	
			110V	**120V**	**KT7-AA-120V**	**KT7-UA-120V**	
			110V	127V	**KT7-AA-127V**	**KT7-UA-127V**	
			220...230V		**KT7-AA-230V**	**KT7-UA-230V**	
				240...260V	**KT7-AA-240V**	**KT7-UA-240V**	
			240V	277V	**KT7-AA-277V**	**KT7-UA-277V**	
			380V	460V	**KT7-AA-460V**	**KT7-UA-460V**	
			415V	**480V**	**KT7-AA-480V**	**KT7-UA-480V**	
			525V	600V	**KT7-AA-600V**	**KT7-UA-600V**	
	Shunt Trip • Left-side mounted • Adds 18 mm to the width of the KT7 device • Trips motor protector when voltage is applied remotely	KTU7	**DC Coil Voltage**		**Shunt Trip**	**Undervoltage**	**Price**
			9V DC		**KT7-AA-9D**	**KT7-UA-9D**	**103.65**
			12V DC		**KT7-AA-12D**	**KT7-UA-12D**	
			24V DC		**KT7-AA-24D**	**KT7-UA-24D**	
			36V DC		**KT7-AA-36D**	**KT7-UA-36D**	
			48V DC		**KT7-AA-48D**	**KT7-UA-48D**	
			60V DC		**KT7-AA-60D**	**KT7-UA-60D**	
			64V DC		**KT7-AA-64D**	**KT7-UA-64D**	
			72V DC		**KT7-AA-72D**	**KT7-UA-72D**	
			80V DC		**KT7-AA-80D**	**KT7-UA-80D**	

Undervoltage Trip Connection Diagram



Shunt Trip Connection Diagram



❶ For Overload (thermal) Trip of KT7.
❷ For Short-Circuit (magnetic) Trip of KT7.

Classic Handle Assembly, Type 1/4/4X/12

Accessory	Description	Color	Legend ❷	For use with...	Frame Size (Length)	Catalog Number	Price
	Classic Door Coupling Handle ❶❷❸ • For 3 padlocks 4...8 mm (5/16") diameter • Type 1/3/3R/4/4X/12 and IP66 • Interlock override capability • Can be modified for locking in ON position • Ships with coupling — order extension shaft and legend plate separately • See Technical Section for mounting depth information	Gray/Black	O - I OFF -ON Trip	KTA7, KTB7, KTC7, KTV7 ❶❷ KTU7 ❸	65 x 65mm	**KT7-HTN**	**124.38**
		Red/Yellow	O - I OFF -ON Trip		65 x 65mm	**KT7-HTRY**	**144.08**
	Extension Shaft ❶ • Cut to required length for mounting depth (adapter-door) • See Technical Section for mounting depth information			KT7-HTN KT7-HTRY	250 mm	**KT7-HT**	**36.48**
					400 mm	**KT7-HTL**	**52.86**

Contemporary Handle Assembly, Type 3R/3/4/4X

Accessory	Description	Color	Legend ❷	For use with...	Frame Size (Length)	Catalog Number	Price
	Contemporary Door Coupling Handle ❺ • Screw Fixing • Type 3R, 3, 12, 4, 4X, IP66 • Field configurable for defeatable or non-defeatable • Ships with coupling — order extension shaft and legend plate separately • Requires 30mm hole for mounting • For up to 2 padlocks	Black/Black	O - I OFF -ON Trip	KTA7 KTB7 KTC7 KTV7 KTU7	48.7 x 47mm	**KT7-SB**	**44.06**
		Red/Yellow	O - I OFF - ON Trip		48.7 x 47mm	**KT7-SY**	**44.06**
	Extension Shaft • Cut to required length for mounting depth (adapter-door) • See Technical Section for mounting depth information			KT7-SB KT7-SY	305mm (12")	**KT7-S1**	**22.18**
					533mm (21")	**KT7-S2**	**28.91**

Handle Accessories

Accessory	Description	For use with...	Catalog Number	Price
	Extension Shaft Support ❹ • Provides consistent alignment of the KT7 shafts with handle or door coupling • Recommended for shaft lengths >200mm (7.8 in) • 9mm in width and snaps on right side of KT_7 devices • Allows for one side-mount auxiliary	KT7-HT_ KT7-S_ KT7-N_	**KT7-SHS**	**24.98**
	Legend Plate • Marking: "Haupschalter" and "Main Switch" (Black/Gray) • Marking: "Not-Aus" and "Emergency Off" (Black/Yellow)	KT7-HT_ KT7-S_	**KT7-HTFCN** **KT7-HTFCRY**	**12.33**

❶ See Dimensions and Technical data in this section for design compatibility.
❷ KTA7, KTB7 and KTC7 can be used with Series D or later KT7-H_ Handle mechanism with "I-O" markings or Series E with "ON-OFF" markings.
❸ KTU7 requires Series E or later to comply with UL489 "ON-OFF" Trip markings.
❹ See page F41 for assembly example and dimensions.
❺ See page F42 for KT7-S_ handle dimensions.

Accessories for KT_7

Accessory	Description	Color	For Use With	Catalog Number	Price
 KT7-KRY1 KT7-DS	**Lockable Twist Knob** • For 1 padlock 4...5 mm (1/4") dia. shackle • Can be locked in OFF position	Black	KTA7, KTB7, KTC7, KTV7 KTU7	**KT7-KN1**	**9.02**
		Red/Yellow		**KT7-KRY1**	**14.10**
	Locking Tag • Padlock attachment to the lockable handles • Up to three padlocks 4...8 mm (5/16") shackle	Red	KT7-KN1 KT7-KRY1 KT7-45-KRY	**KT7-DS**	**36.28**
	Terminal Adapter for Type E Applications ❶ • Required on all KT7s used in UL Type E applications • May not be used with Bus Bars		KTA/B/C7/V7-25/32	**KT7-25-TE1**	**11.61**
			KTA/B/C7-45	**KT7-45-TE**	**17.31**
	Anti-Tamper Shield • Provides protection against inadvertent adjustment of the current setting • 10 pieces per package (price per piece)		KTA7 KTB7 KTC7 KTV7	**KT7-25-CA**	**15.13**
	**Screw Adaptor** • For screw fixing of KT7 Motor Circuit Controller • 10 pieces per package (price per piece)		KTA7 KTB7 KTC7 KTV7 KTU7	**KT7-45-AS**	**15.13**

Marking Systems

Component	Description	Pkg. Qty.	Catalog Number	Price Each
	Label Sheet - 1 sheet with 105 self-adhesive paper labels each, 6 x17mm	1	**CA7-FMS**	**See page A54**
	Marking Tag Sheet - 1 sheet with 160 perforated paper labels each, 6 x 17mm. To be used with transparent cover	1	**CA7-FMP**	
	Transparent Cover - To be used with Marking Tag Sheets	100 ❷	**CA7-FMC**	
	Tag Carrier - For marking with marker cards and tags. See page N6 for complete listing of available cards and tabs.	100 ❷	**CA7-FMA2**	

❶ Terminal Adaptors are supplied as standard on enclosed KT7 and CX7 starters, as well as, CL8, CL7 and CK7 assembled products, assuring they can be used in Type E applications. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.

❷ Minimum quantity is one package of 100. Price is each x 100 = total price.

Connecting Modules *(for connecting KTA7, KTB7 or KTC7 to CA8, CA7 AC coil, or CA7 Electronic DC coil contactors)* ❷

Module	Description	For Connecting. . .	To Contactor. . .	Catalog Number ❶	Price
	**Connecting Modules (forms Ecombo Starter) - ❶** • Provides electrical and mechanical interconnection of KT7 and CA8 (with AC or DC coils), CA7 (with AC coils) or CA7-_E (with Electronic DC coils). • Suitable for reversing and wye-delta kits • Ecombo starter (with KT7-25/32) mounts on a single DIN-rail (KT7 mounts on DIN-rail) • Ecombo starter (with KT7-45) can be mounted on two DIN-rails or on Mounting Modules (see selection table below) • Contactor coil mounted on load side	KT_7-25S..32S or KF7	CA8-9...12 12A max.	**KT7-25S-PEK12**	**66.02**
		KT_7-25S..32S or KF7	CA7-9...23 CA7-9E...23E	**KT7-25S-PEC23**	**45.40**
		KT_7-25H..32H	CA7-9...23 CA7-9E...23E	**KT7-25H-PEC23**	**45.40**
		KT_7-25H..32H	CA7-30...37 CA7-30E...37E	**KT7-25H-PNC37**	**45.40**
		KT_7-45H	CA7-30...37 CA7-30E...37E	**KT7-45H-PNC37**	**45.40**
		KT_7-45H	CA7-43 CA7-43E	**KT7-45H-PNC43**	**45.40**

Connecting Modules *(for connecting KTA7, KTB7 or KTC7 to CA7 to make CLT7 type assemblies)* ❷

Module	Description	For Connecting…	To Contactor. . .	Use Connector. . . ❶	Price	With Coil Module. . .	Price
KT7-25S-PNC23 KT7-25S-PSC23	**Connecting Modules** • Provides electrical interconnection of KT7 and CA7 contactors • Contactor Coil Module extends A1/A2 Line Side terminals forward to facilitate wiring • Contactor and motor protector must be mounted on two DIN-rails or on Mounting Module (see selection table below)	KT_7-25S..32S or KF7	CA7-9..23	**KT7-25S-PNC23**	**45.40**	**KT7-25S-PSC23**	**22.39**
		KT_7-25H..32H		**KT7-25H-PNC23**	**45.40**		
		KT_7-25H..32H	CA7-30..37	**KT7-25H-PNC37**	**45.40**	**KT7-45H-PSC43**	**22.39**
		KT_7-45H		**KT7-45H-PNC37**	**45.40**		
		KT_7-45H	CA7-43	**KT7-45H-PNC43**	**45.40**		

Type W Mounting Modules

Module	Description	Width (mm)	Catalog Number	Price
	**Short Mounting Module -** Requires Connecting Module from tables above • Provides support for KT7 + CA7 or CA8 • Top rail is specifically designed for KT7 • Bottom rail is movable for easy assembly and disassembly • Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts • 228 mm high	45	**W-32489**	**23.85**
		54	**W-32490**	**27.68**
	Long Mounting Module - See Section D for Connecting Modules • Provides support for KT7 + PCS Softstarter, CA7 + PCS Softstarter or KTB7 + CA7+CEP7 • Top rail is specifically designed for KT7 • Bottom rail is movable for easy assembly and disassembly • Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts • 283 mm high	45	**W-32496**	**25.76**
		54	**W-32497**	**29.58**
	Spacer for Mounting Module - Fits between 45mm and 54mm for Reversing applications (228 mm high)	9	**W-32955**	**14.31**
	Dovetail Joints - Used to connect two mounting modules together. (Sold in packages of 50)		**W-32954**	**0.95**

❶ cURus Approved (File # E33916).
❷ Not for use with KTU7 Circuit Breakers

Compact Busbar System for KTA7, KTB7 and KTC7 Motor Controlers ❶❷❹

Accessory	Description	For Use With	Catalog Number	Price
	Compact Busbar — 45 mm Spacing (Rated 64 A) • For use with front-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers	KT_7-25…32S KT_7-25…32H ❸	 **KT7-32-DB-45-2** **KT7-32-DB-45-3** **KT7-32-DB-45-4** **KT7-32-DB-45-5**	 **44.68** **51.41** **58.26** **64.79**
	**Compact Busbar — 54 mm Spacing (Rated 64 A)** • For use with side-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers	KT_7-25…32S KT_7-25…32H ❸	 **KT7-32-DB-54-2** **KT7-32-DB-54-3** **KT7-32-DB-54-4** **KT7-32-DB-54-5**	 **45.40** **52.44** **59.81** **65.71**
	Compact Busbar — 54mm Spacing (Rated 120 A) • For use with front-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers	KT_7-45H	**KT7-45-DB-54-2** **KT7-45-DB-54-3** **KT7-45-DB-54-4**	**68.51** **81.89** **99.82**
	**Compact Busbar — 63 mm Spacing (Rated 120 A)** • For use with side-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers	KT_7-45H	**KT7-45-DB-63-2** **KT7-45-DB-63-3** **KT7-45-DB-63-4**	**70.69** **92.97** **120.23**
 KTA7-25S to 25H KBH2	**Spacer for KT_7-25…32H to KT_7-25…32S** • Accommodates difference in depth from KT_7-25H…32H to KT_7-25S…32S • Aligns terminals for compact bus bar connection	KT_7-25…32S to KT_7-25…32H ❸	**KBH2**	**7.76**
 A2E A3E	**Supply Block and Terminal** • For power connection to Compact Busbar — 600V, KT_7-25/32…63A max. / KT_7-45…120A maximum • Top feed — overlaps commoning link • Meets requirements for terminal spacing from source in Type E applications • KT7-25-A2E and KT7-45-A2E are primarily used for bottom cable feed	KT_7-25…32S or KT_7-25…32H ❸ KT_7-45H	**KT7-25-A2E** **KT7-32-A3E** **KT7-45-A2E** **KT7-45-A3E**	**70.79** **47.58** **126.45** **111.95**
	Terminal Cover • For covering of unused connection terminals • IP2X finger protection	KT_7-25...32 KT_7-45H	**KT7-32-DBA** **KT7-45-DBA**	**8.70** **9.27**

❶ UL Approved (File #E33916); CSA Approved (File #13908).
❷ Compact busbar may not be applied with KT7-25-TE1 or KT7-45-TE Terminal Adaptors. Either Terminal Adaptors or Bus Bar may be used, not both.
❸ KT7-25…32S and KT7-25…32H may not be combined without KBH2.
❹ Not for use with KTU7 Circuit Breakers

KF7 Fuse Holder to be used with KT7 or CA8/CA7 ❺

Accessory	Description	Approvals		Catalog Number	Price
		IEC/CE	UL/CSA		
	KF7 Fuse Holder, CC - 30A	Yes	Yes	**KF7-D3C-C30**	**64.16**
Blown Fuse Indicator	KF7 Fuse Holder with Blown Fuse Indication, CC - 30A	Yes	Yes	**KF7-D3C-C30L**	**90.28**



Lockable in Open Position

KF7 is Compatible with KT7 Compact Busbar ❹

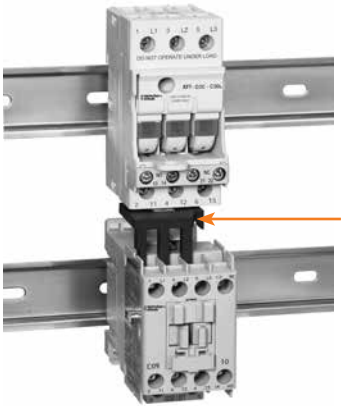

Connector to Contactor
❶
❷
❸

Applying KF7 with KTA7 Motor Circuit Controllers and CA7 Contactors

KF7 can be applied on the line side of a multiple small KTA7 motor circuit controller or a single KTA7 controller and CA7 contactors to increase the short-circuit protection of the group or a single branch circuit. KF7 is compatible with the KT7 compact bus bars (as shown in Section F), which reduces the space requirement as well as installation time.

Applying KF7 with CA7 Contactors

KF7 can be applied on the line side of CA7 contactors to increase the short-circuit withstand rating. The cUL withstand rating of CA7 when protected by Type “CC” fuses is increased to 100KAIC as shown on page A72.

Accessory	Connection Diagram	Description	Catalog Number	Price
		**Auxiliary Contact for KF7 Fuse Holder (1 NO Late Make + NC Early Break)** • NO Late Make, provides positive indication that power circuit is open • NC Early Break, provides capability for dropping out contactor before breaking current on fuse	**KF7-PE1-11**	**31.41**

❶ The KF7 terminal spacing and height are the same as KT_7-25S. Reference page F17 tables to select a connector.
❷ If using a KT7-25S-PEK12 (with CA8) or KT7-25S-PEC23 (with CA7), close couple connector, then the pair mounts on a single DIN rail under the KF7.
❸ Using a KT7-25S-PNC23 to mount a KF7 with a standard CA7 with AC Coil requires two DIN rails.
The A1-A2 terminals of a standard CA7 with AC Coil can be turned to the load side. In this case a KT7-25S-PSC23 would not be required.
❹ KF7 can not be mounted directly to a KT_7 using a PEK, PEC or PNC Connector. KF7, used in connection with a Compact Bus Bar, can provide Group Fusing protection for multiple bus bar connected KT_7.
❺ For dimensions and wiring diagrams see page F44.

IEC Performance Data

		Catalog Number KTA7-25S...32S														
		0.16A	**0.25A**	**0.4A**	**0.63A**	**1A**	**1.6A**	**2.5A**	**4A**	**6.3A**	**10A**	**16A**	**20A**	**25A**	**29A**	**32A**
Rated Operational Current, I_e	[A]	0.16	0.25	0.4	0.63	1	1.6	2.5	4	6.3	10	16	20	25	29	32
Magnetic Release Current	[A]	2.1	3.3	5.2	8.2	13	21	33	52	82	130	208	260	325	406	448
Switching of Standard Three-Phase Motors																
AC-2, AC-3																
230/240V	[kW]	~	~	0.06	0.09	0.18	0.25	0.37	0.75	1.5	2.2	4.0	5.5	5.5	7.5	7.5
400/415V	[kW]	0.02	0.04	0.09	0.18	0.25	0.55	0.75	1.5	2.2	4.0	7.5	10	11	13	15
500V	[kW]	0.06	0.09	0.12	0.18	0.37	0.75	1.1	2.2	3.0	6.3	10	11	15	18.5	20
690V	[kW]	0.06	0.09	0.18	0.25	0.55	1.1	1.8	3.0	4.0	7.5	13	17	22	25	25
Back-up Fuses																
gG, gL, only if $I_{cc} \geq I_{cu}$																
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	100	100	125	125
400/415V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	80	100	100	125	125
440/460V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	63	63	80	80	100	100
500V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	80	80	80	80	100	100
690V	[A]	❶	❶	❶	❶	❶	16	20	35	50	50	63	63	63	80	80
Ultimate Short-Circuit Breaking Capacity I_{cu}																
230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	65	65	50	50
400/415V	[kA]	100	100	100	100	100	100	100	100	100	100	65	50	15	15	15
440/460V	[kA]	100	100	100	100	100	100	100	100	100	50	10	6	6	6	6
500V	[kA]	100	100	100	100	100	100	100	100	100	50	10	6	6	6	6
690V	[kA]	100	100	100	100	100	8	6	6	4	4	3	3	3	3	3
Rated Service Short-Circuit Breaking Capacity I_{cs}																
230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	50	50	25	25
400/415V	[kA]	100	100	100	100	100	100	100	100	100	100	50	15	15	15	15
440/460V	[kA]	100	100	100	100	100	100	100	100	100	50	6	6	6	6	6
500V	[kA]	100	100	100	100	100	100	100	100	100	50	6	6	6	6	6
690V	[kA]	100	100	100	100	100	8	6	6	4	4	3	3	3	3	3

❶ No backup fuse required.

IEC Performance Data

		Catalog Number KTA7-25H...32H									Catalog Number KTA7-45H...					
		2.5A	**4A**	**6.3A**	**10A**	**16A**	**20A**	**25A**	**29A**	**32A**	**10A**	**16A**	**20A**	**25A**	**32A**	**45A**
Rated Operational Current, I_e	[A]	2.5	4	6.3	10	16	20	25	29	32	10	16	20	25	32	45
Magnetic Release Current	[A]	33	52	82	130	208	260	325	406	448	130	208	260	325	416	585
Switching of Standard Three-Phase Motors																
AC-2, AC-3																
230/240V	[kW]	0.37	0.75	1.5	2.2	4.0	5.5	5.5	7.5	7.5	2.2	4.0	5.5	6.3	7.5	13
400/415V	[kW]	0.75	1.5	2.2	4.0	7.5	10	11	13	15	4.0	7.5	10	11	15	22
500V	[kW]	1.1	2.2	3.0	6.3	10	11	15	18.5	20	6.3	10	11	15	20	30
690V	[kW]	1.8	3.0	4.0	7.5	13	17	22	25	25	7.5	13	17	22	30	40
Back-up Fuses																
gG, gL, only if $I_{cc} \geq I_{cu}$																
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶
400/415V	[A]	❶	❶	❶	❶	❶	100	100	125	125	80	100	100	100	125	125
440/460V	[A]	❶	❶	❶	❶	80	100	100	125	125	80	100	100	100	125	125
500V	[A]	❶	❶	❶	❶	80	80	80	100	100	80	100	100	100	125	125
690V	[A]	20	35	50	50	63	63	63	80	80	63	80	80	80	100	100
Ultimate Short-Circuit Breaking Capacity I_{cu}																
230/240V	[kA]	100	100	100	100	100	100	100	65	65	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	65	50	50	100	100	100	100	65	65
440/460V	[kA]	100	100	100	50	50	50	50	25	25	65	65	65	65	65	50
500V	[kA]	100	100	100	50	50	50	50	25	25	50	50	50	50	50	50
690V	[kA]	10	10	6	6	6	6	6	6	6	10	10	10	10	10	10
Rated Service Short-Circuit Breaking Capacity I_{cs}																
230/240V	[kA]	100	100	100	100	100	100	100	50	50	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	50	25	25	25	25	50	50	50	50	50	50
440/460V	[kA]	100	100	100	50	50	25	25	20	20	50	50	50	50	50	50
500V	[kA]	100	100	100	50	50	25	25	20	20	50	50	50	50	50	50
690V	[kA]	10	10	6	6	4	4	4	4	4	10	10	10	10	6	6

❶ No backup fuse required.

IEC Performance Data

		Catalog Number KTB7-25S...						
		0.16A	**0.25A**	**0.4A**	**0.63A**	**1A**	**1.6A**	**2.5A**
Rated Operational Current, I_e	[A]	0.16	0.25	0.4	0.63	1	1.6	2.5
Magnetic Release Current	[A]	2.1	3.3	5.2	8.2	13	21	32
Switching of Standard Three-Phase Motors								
AC-2, AC-3								
230/240V	[kW]	~	~	0.06	0.09	0.18	0.25	0.37
400/415V	[kW]	0.02	0.04	0.09	0.18	0.25	0.55	0.75
500V	[kW]	0.06	0.09	0.12	0.18	0.37	0.75	1.1
690V	[kW]	0.06	0.09	0.18	0.25	0.55	1.1	1.8
Back-up Fuses								
gG, gL, only if $I_{cc} \geq I_{cu}$								
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶
400/415V	[A]	❶	❶	❶	❶	❶	❶	❶
440/460V	[A]	❶	❶	❶	❶	❶	❶	❶
500V	[A]	❶	❶	❶	❶	❶	❶	❶
690V	[A]	❶	❶	❶	❶	❶	16	20
Ultimate Short-Circuit Breaking Capacity I_{cu}								
230/240V	[kA]	100	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	100
440/460V	[kA]	100	100	100	100	100	100	100
500V	[kA]	100	100	100	100	100	100	100
690V	[kA]	100	100	100	100	100	10	6
Rated Service Short-Circuit Breaking Capacity I_{cs}								
230/240V	[kA]	100	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	100
440/460V	[kA]	100	100	100	100	100	100	100
500V	[kA]	100	100	100	100	100	100	100
690V	[kA]	100	100	100	100	100	8	6

❶ No backup fuse required.

IEC Performance Data

		Catalog Number KTB7-25H...32H							Catalog No. KTB7-45H...		
		2.5A	**4A**	**6.3A**	**10A**	**16A**	**25A**	**32A**	**25A**	**32A**	**45A**
Rated Operational Current, I_e	[A]	2.5	4	6.3	10	16	25	32	25	32	45
Magnetic Release Current	[A]	32	52	82	130	208	325	448	325	416	585
Switching of Standard Three-Phase Motors											
AC-2, AC-3											
230/240V	[kW]	0.37	0.75	1.5	2.2	4.0	5.5	7.5	6.3	7.5	13
400/415V	[kW]	0.75	1.5	2.2	4.0	7.5	11	15	11	15	22
500V	[kW]	1.1	2.2	3.0	6.3	10	15	20	15	20	30
690V	[kW]	1.8	3.0	4.0	7.5	13	22	25	22	25	40
Back-up Fuses											
gG, gL, only if $I_{cc} \geq I_{cu}$											
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	100	125	125
400/415V	[A]	❶	❶	❶	❶	❶	100	125	100	125	125
440/460V	[A]	❶	❶	❶	❶	80	100	125	100	125	125
500V	[A]	❶	❶	❶	❶	80	80	100	100	125	125
690V	[A]	20	35	50	50	63	63	80	80	100	100
Ultimate Short-Circuit Breaking Capacity I_{cu}											
230/240V	[kA]	100	100	100	100	100	100	65	100	100	100
400/415V	[kA]	100	100	100	100	100	65	50	100	65	65
440/460V	[kA]	100	100	100	50	50	50	25	65	65	50
500V	[kA]	100	100	100	50	50	25	25	50	50	50
690V	[kA]	10	6	10	6	6	6	6	10	10	10
Rated Service Short-Circuit Breaking Capacity I_{cs}											
230/240V	[kA]	100	100	100	100	100	100	50	100	100	100
400/415V	[kA]	100	100	100	100	50	25	25	50	50	50
440/460V	[kA]	100	100	100	50	50	25	20	50	50	50
500V	[kA]	100	100	100	50	50	25	20	50	50	50
690V	[kA]	10	6	10	6	4	4	4	10	6	6

❶ No backup fuse required.

IEC Performance Data

		Catalog Number KTC7-25S...										
		0.16A	**0.25A**	**0.4A**	**0.63A**	**1A**	**1.6A**	**2.5A**	**4A**	**6.3A**	**10A**	**16A**
Rated Operational Current, I_e	[A]	0.16	0.25	0.4	0.63	1	1.6	2.5	4	6.3	10	16
Magnetic Release Current	[A]	3.2	5.2	8.2	13	21	32	52	82	130	208	260
Switching of Standard Three-Phase Motors												
AC-2, AC-3												
230/240V	[kW]	~	~	0.06	0.09	0.18	0.25	0.37	0.75	1.5	2.2	4.0
400/415V	[kW]	0.02	0.04	0.09	0.18	0.25	0.55	0.75	1.5	2.2	4.0	7.5
500V	[kW]	0.06	0.09	0.12	0.18	0.37	0.75	1.1	2.2	3.0	6.3	10
690V	[kW]	0.06	0.09	0.18	0.25	0.55	1.1	1.8	3.0	4.0	7.5	13
Back-up Fuses												
gG, gL, only if $I_{cc} \geq I_{cu}$												
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶
400/415V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	80
440/460V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	63	80
500V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	80	80
690V	[A]	❶	❶	❶	❶	❶	16	20	35	50	50	63
Ultimate Short-Circuit Breaking Capacity I_{cu}												
230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	100	100	100	100	50
440/460V	[kA]	100	100	100	100	100	100	100	100	100	10	10
500V	[kA]	100	100	100	100	100	100	100	100	100	10	10
690V	[kA]	100	100	100	100	100	8	6	6	4	4	3
Rated Service Short-Circuit Breaking Capacity I_{cs}												
230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	100	100	100	100	15
440/460V	[kA]	100	100	100	100	100	100	100	100	100	10	6
500V	[kA]	100	100	100	100	100	100	100	100	100	10	6
690V	[kA]	100	100	100	100	100	8	6	6	4	4	3

❶ No backup fuse required.

IEC Performance Data

		Catalog No. KTC7-25H...		Catalog No. KTC7-45H...	
		16A	**20A**	**25A**	**32A**
Rated Operational Current, I_e	[A]	16	20	25	32
Magnetic Release Current	[A]	260	325	416	585
Switching of Standard Three-Phase Motors					
AC-2, AC-3					
230/240V	[kW]	4.0	5.5	6.3	7.5
400/415V	[kW]	7.5	10	11	15
500V	[kW]	10	11	15	20
690V	[kW]	13	17	22	30
Back-up Fuses					
gG, gL, only if $I_{cc} \geq I_{cu}$					
230/240V	[A]	❶	❶	❶	❶
400/415V	[A]	80	100	100	125
440/460V	[A]	80	100	100	125
500V	[A]	80	80	100	125
690V	[A]	63	63	80	100
Ultimate Short-Circuit Breaking Capacity I_{cu}					
230/240V	[kA]	100	100	100	100
400/415V	[kA]	100	65	65	65
440/460V	[kA]	50	25	65	65
500V	[kA]	50	25	50	50
690V	[kA]	6	6	10	10
Rated Service Short-Circuit Breaking Capacity I_{cs}					
230/240V	[kA]	100	100	100	100
400/415V	[kA]	25	25	50	50
440/460V	[kA]	25	25	50	50
500V	[kA]	25	25	50	50
690V	[kA]	4	4	6	6

❶ No backup fuse required.

IEC Performance Data

		Catalog Number KTV7-25H...									
		1.6A	**2.5A**	**4A**	**6.3A**	**10A**	**16A**	**20A**	**25A**	**29A**	**32A**
Rated Operational Current, I_e	[A]	1.6	2.5	4.0	6.3	10	16	20	25	29	32
Magnetic Release Current	[A]	82	82	82	82	130	208	260	325	402	448
Switching of Standard Three-Phase Motors											
AC-3											
230/240V	[kW]	0.25	0.37	0.75	1.5	2.2	4	5.5	5.5	7.5	7.5
400/415V	[kW]	0.55	0.75	1.5	2.2	4	7.5	10	11	13	15
500V	[kW]	0.75	1.1	2.2	3	6.3	10	11	15	18.5	20
690V	[kW]	~	~	~	~	~	~	~	~	~	~
Back-up Fuses											
gG, gL, only if $I_{cc} \geq I_{cu}$											
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶
400/415V	[A]	❶	❶	❶	❶	❶	❶	100	100	125	125
440/460V	[A]	❶	❶	❶	❶	❶	80	100	100	125	125
500V	[A]	❶	❶	❶	❶	❶	80	80	80	100	100
690V	[A]	~	~	~	~	~	~	~	~	~	~
Ultimate Short-Circuit Breaking Capacity I_{cu}											
230/240V	[kA]	65	65	65	65	65	65	65	65	65	65
400/415V	[kA]	65	65	65	65	65	65	65	65	50	50
440/460V	[kA]	65	65	65	65	65	50	50	50	25	25
500V	[kA]	65	65	65	65	65	50	50	50	25	25
690V	[kA]	~	~	~	~	~	~	~	~	~	~
Rated Service Short-Circuit Breaking Capacity I_{cs}											
230/240V	[kA]	65	65	65	65	65	65	65	65	50	50
400/415V	[kA]	65	65	65	65	65	50	25	25	25	25
440/460V	[kA]	65	65	65	65	65	50	25	25	20	20
500V	[kA]	65	65	65	65	65	50	25	25	20	20
690V	[kA]	~	~	~	~	~	~	~	~	~	~

❶ No backup fuse required.

General Data

		KT7-25S/32S	KT7-25H/32H	KT7-45H
Rated Insulation Voltage				
IEC, SEV, VDE 0660		690V	690V	690V
UL, CSA		600V	600V	600V
Rated Impulse Withstand Voltage (main & auxiliary circuits)				
U_{imp}/pollution degree		6kV/3	6kV/3	6kV/3
Rated Frequency		50/60 Hz	50/60 Hz	50/60 Hz
Utilization Category				
• IEC 60949-2 (Motor Protector)		A	A	A
• IEC 60949-4-1 (Motor Starter)		AC-3	AC-3	AC-3
Life Span				
Mechanical	[operations]	100,000	100,000	30,000
Electrical (I_e max.)	[operations]	100,000	100,000	30,000
Switching Frequency	[operations]	max. 25/h. (motor starts)		
Ambient Temperature				
Storage		-40° C...+80° C		
Operation		-25° C...+60° C		
Resistance to Climatic Change		IEC 68-2		
Moisture / Heat Resistance	(600068-2-3)	40°C, 93% relative humidity, 56 days		
Moisture / Change Resistance	(600068-2-3)	23°C, 83% relative humidity / 40°C, 92%, 56 cycles		
Dry Heat	(60086-2-2)	100°C Relative Humidity <50% 7 Days		
Site Altitude		to 2,000 m N.N.		
Protection Class		KT_7-25/32_: IP2X from all directions KT_7-45: IP2X from front with front (upper) terminal wired		
Resistance to Shock	(60068-2-2)	30 G, 11 ms All Axes		
Resistance to Vibration	(60068-2-6)	5G		
Rated Thermal Current I_{th}				
IEC, SEV, VDE 0660				
Up to 60° C ambient temperature	[A]	0.1...32	1.6...32	6.3...45
Dependence on Temperature		40°C - 60°C No Reduction 70°C 15% Reduction of the upper rated current I_e		
Overload Protection				
Characteristics				
Ambient temperature		IEC60947-4-1 Motor protection (except KTB7)		
Compensation		-20° C...+60° C		
Phase-failure protection		yes, differential release		
Trip Class		10 (Except KTB7)		
Magnetic Release		fixed setting		
Response Current (+/- 20%)		13…14 x $I_e$max. (for KTA7/KTB7) 16…21 x $I_e$max. (for KTC7) I_e max.=maximum values of setting ranges Fixed magnetic setting for KTV7, see ratings		
Total Power Loss P_v				
Motor protector at rated load Operating temperature	[W]	6...11.5	6...11.6	9...16
Application Conditions (KTV7)		PWM frequency ≤ 4kHz		
		VFD output frequency ≤ 400 Hz		

Weights

Description	Catalog Number	Weight
Motor Protectors	KTA7-25S/32S	317 g
	KTA7-25H/32H	373 g
	KTA7-45H	782 g
	KTB7-25S/32S	315 g
	KTB7-25H/32H	365 g
	KTB7-45H	782 g
	KTC7-25S/32S	315 g
	KTC7-25H/32H	365 g
	KTC7-45H	782 g
Auxiliary Contacts	KT7-PE1	10 g
	KT7-PA1	
	KT7-PEF1	15 g
	KT7-PAF1	
Undervoltage Trip	KT7-UA-✱	108 g
	KT7-AA-✱	110 g
	KT7-UA-L20-✱	116 g
Anti-Tamper Cover	KT7-25-CA	2 g

Description	Catalog Number	Weight
Lockable Twist Knob	KT7-KN1	5 g
	KT7-KRY1	
Locking Tag	KT7-DS	30 g
Door Coupling Handle	KT7-HTN	123 g
	KT7-HTRY	
Extension Shaft	KT7-HT	46 g
Legend Plate	KT7-HTFC	4 g
Feeder Terminal	KT7-32-A3E	172 g
	KT7-45-A3E	
Commoning Links	KT7-32-DB-45-2	47 g
	KT7-32-DB-45-3	80 g
	KT7-32-DB-45-4	104 g
	KT7-32-DB-45-5	132 g
	KT7-32-DB-54-2	52 g
	KT7-32-DB-54-3	86 g
	KT7-32-DB-54-4	118 g
	KT7-32-DB-54-5	154 g

General Data

	KT_7-25S/32S	KT_7-25H/32H	KT_7-45H
Features and Approvals			
Max. Current I_e	32 A	32 A	45 A
Current Rating	0.1…32 A	1.6…32 A	6.3…45 A
Short Circuit Protection	✓	✓	✓
Standard magnetic Trip	✓	✓	✓
High Magnetic Trip	✓	✓	✓
Magnetic Only Trip (MCP)	✓	✓	✓
Overload Protection	✓	✓	✓
Trip Class	✓	✓	✓
Application at output of VFD (multi-motor)		✓ (KTV7)	✓
Standards Compliance:			
CSA22.2, No. 14	✓	✓	✓
UL508 (Group Installation)	✓(see ratings)	✓(see ratings)	✓(see ratings)
UL508 Manual, Self-protected (Type E)	✓(see ratings)	✓(see ratings)	✓(see ratings)
UL508 (Overload Protection)	✓	✓	✓
IEC60947-1,-2	✓	✓	✓
IEC60947-4-1	✓	✓	✓
CE	✓	✓	✓
ATEX (IEC60079-14)	✓ (up to 25 A)	✓ (up to 25 A except KTV7)	✓
CCC	✓ (up to 25 A)	✓ (up to 25 A except KTV7)	✓
Accessories			
External Rotary Operator	✓	✓	✓
Auxiliary Contacts	✓	✓	✓
Trip Indicator Contacts	✓	✓	✓

			KT_7-25S/32S	KT_7-25H/32H	KT_7-45H
Power Terminals					
Terminal Type					
Screwdriver				Pozidrive No. 2/Blade No. 3	Pozidrive No. 2/Blade No. 3
	1 conductor	[mm²]/[AWG]		1...6 / No. 16...10	2.5...16 / No. 14...4
	2 conductor	[mm²]/[AWG]		1...4 / No. 16...10	2.5...10 / No. 14...4
	1 conductor	[mm²]/[AWG]		1.5...6 / No. 16...8	2.5...16 / No. 14...4
	2 conductor	[mm²]/[AWG]		1.5...6 / No. 16...8	2.5...10 / No. 14...4
	1 conductor	[mm²]/[AWG]		1...6 / No. 16...10	2.5...10 / No. 14...8
	2 conductor	[mm²]/[AWG]		1...6 / No. 16...10	2.5...10 / No. 14...8
Tightening torque		[Nm]/[lb-in.]		2...2.5 / 18...22	3...3.5 / 27...30

Accessories for KT7 Motor Circuit Controllers

			Auxiliary Contact Blocks for Front Mounting Catalog Number KT7-PE1, KT7-PEF1			Auxiliary Contact Blocks for Right-Side Mounting Catalog Number KT7-PA1, KT7-PAF1				
IEC Rated Thermal Current I_{th}										
Rated Voltage		[V]	300 max.			600 max.				
at 40°C ambient temperature		[A]	5			10				
at 60°C ambient temperature		[A]	4			6				
UL/CSA Rated Thermal Current I_{th}										
Rated Voltage		[V]	300 max.			600 max.				
Continuous Thermal Current According to NEMA ❶			Class	Amps		Class	Amps			
	AC		B 300	5		B 600	5			
	DC		Q 300	2.5		Q 600	2.5			
Back-Up Fuses gG, gL		[A]	10			10				
Rated Thermal Current I_{th}										
AC-15		[V]	24	120	240	24	120	240	415	690
		[A]	4	3	1.5	6	5	3	2	0.7
DC-13		[V]	24	120	240	24	120	240	415	
		[A]	2	0.5	0.25	2	0.5	0.25	0.15	
Terminal Parts										
Terminal Type										
Screwdriver			Pozidrive No. 2/Blade No. 3			Pozidrive No. 2/Blade No. 3				
	1 conductor	[mm²]/[AWG]	0.5...1.5 / No. 18...14			0.5...2.5 / No. 18...14				
	2 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
	1 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
	2 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
	1 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
	2 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
Tightening torque		[Nm]/[lb-in.]	1.2...1.5 / 10.6...13			1.2...1.5 / 10.6...13				
Lockable Twist Knob (KT7-KN1 & KT7-KRY1)										
Tightening torque		[Nm]/[lb-in.]	1 / 8.8 (T10)							
Mounting Depth – Door Coupling Handles (All KT7-HT...)										
Mounting Depth when using motor circuit controller:										
KT7-25S/32S		[mm]/[in.]	105.5 mm ± 5 mm (4.15" ± 3/16")							
KT7-25H/32H		[mm]/[in.]	114.5 mm ± 5 mm (4.5" ± 3/16")							
KT7-45H		[mm]/[in.]	137.1 mm ± 5 mm (5.4" ± 3/16")							
Mounting Depth – Extension Shaft (KT7-HT)										
Mounting Depth range when using motor circuit controller:										
KT7-25S/32S		[mm]/[in.]	117...338 mm (4.6"...13.3")							
KT7-25H/32H		[mm]/[in.]	126...347 mm (5.0"...13.7")							
KT7-45H		[mm]/[in.]	149...369 mm (5.9"...14.5")							

❶ See page A7 for details of NEMA Contact Class.

KT7 Accessories

			Undervoltage Trip for Left-Side Mounting Cat. Number KT7-UA-*	Undervoltage Trip with 2 Auxiliary Contacts for Left-Side Mounting Cat. Number KT7-UA-L20-*	Shunt Trip for Left-Side Mounting Cat. Number KT7-AA-*
Actuating Voltage		Pull-in Drop-out	0.85...1.1 x U_s 0.7...0.35 x U_s	0.85...1.1 x U_s 0.7...0.35 x U_s	0.7...1.1 x U_s
Rated Control Voltage		minimum maximum	21V 50 Hz, 24V 60 Hz 600V 50 Hz	21V 50 Hz, 24V 60 Hz 600V 50 Hz	21V 50 Hz, 24V 60 Hz 600V 50 Hz
On-Time			100%	100%	AC - 100% DC - Max. 5 sec.
Coil Rating		Pull-in Hold	8.5 VA, 8 W 4 VA, 2 W	8.5 VA, 8 W 4 VA, 2 W	8.5 VA, 8 W 4 VA, 2 W
Terminal Parts					
Terminal Type					
Screwdriver				Pozidrive No. 2/Blade No. 3	
	1 conductor	[mm²]/[AWG]		0.5...2.5 / No. 18...14	
	2 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
	1 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
	2 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
	1 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
	2 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
Tightening torque		[Nm]/[lb-in.]		1.2...1.5 / 10.6...13.3	

			Feeder Block KT7-25-A2E	Feeder Terminal KT7-32-A3E	Compact Busbar KT7-32-DB...	Feeder Terminal KT7-45-A3E	Compact Busbar KT7-45-DB...
Rated Thermal Current I_{th}		[V]	600	600	600	600	600
at 60° C ambient temperature		[A]	64	64	64	120	120
	1 conductor	[mm²]/[AWG]	4...25/No. 10...4	2.5...25/No. 14...4	~	4...50/12...1/0	~
	1 conductor	[mm²]/[AWG]	4...25/No. 10...4	2.5...25/No. 14...4	~	2.5...50/12...1/0	~
	1 conductor	[mm²]/[AWG]	2.5...25/No. 14...4	2.5...25/No. 14...4	~	2.5...50/12...1/0	~
Tightening torque		[Nm]/[lb-in.]	3...3.5 / 27...31	3...3.5 / 27...31	~	5...6/45...54	~

KF7 Fuse Holder Accessories

			KF7 Fuse Holder
Rated Thermal Current I_{th}		[V]	600
at 60° C ambient temperature		[A]	30
Short Circuit			
Withstand		[KA]	200
U_{imp}		[KV]	6
Terminal Parts			
Terminal Type			
Screwdriver			Pozidrive No. 2/ Blade No. 3
	1 conductor	[mm²]/[AWG]	1…4 / No. 16…10
	1 conductor	[mm²]/[AWG]	1…4 / No. 16…10
Tightening torque		[Nm]/[lb-in.]	1.7 / 15

Time-Current Characteristic

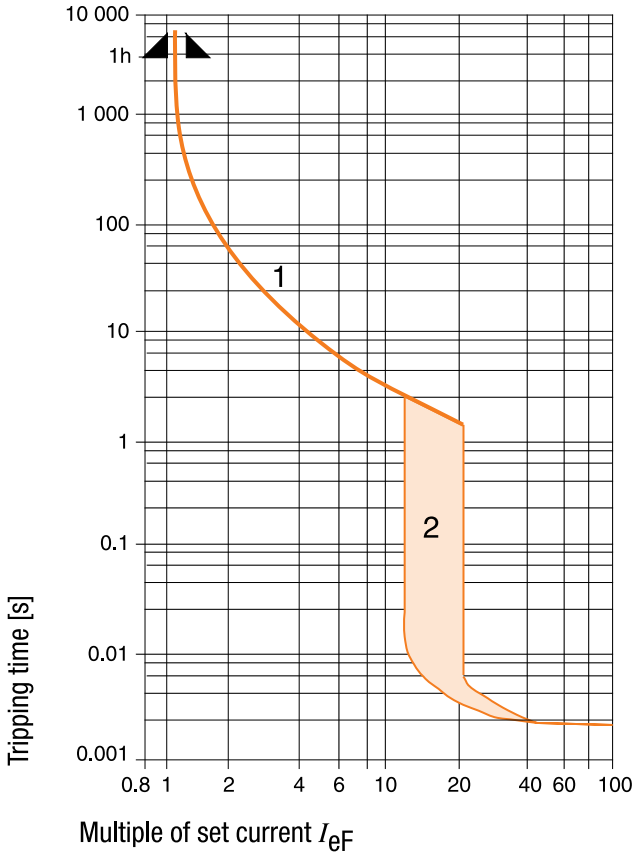

KTA7 Motor Protection (for KTV7, see ratings)

1. Thermal Release Trip Current

The adjustable current-dependent delayed bimetal release protects motors against overload. The curve shows the mean operating current at an ambient temperature of 20°C starting from the cold state. Careful testing and setting ensures effective motor protection even in the case of single-phasing. The overload characteristic is also valid for transformer protection.

2. Magnetic Release Trip Current

The instantaneous magnetic trip has a fixed operating current setting. This corresponds to 13 times the maximum value of setting range (high inrush protection -20 x I_e maximum). At a lower overload setting the magnetic trip is correspondingly higher.

Current Setting I_{ef}

The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 947-4-1. If a different value is prescribed (e.g., reduced I_e for cooling medium having a temperature higher than 40°C or a place of installation higher than 2000m above sea level), the setting current is equal to the reduced rated current I_e of the motor.

Cut-off Current ❶

KTA/B/C7-25/32S
Max. Cut-Off-Current, Ue = 500V

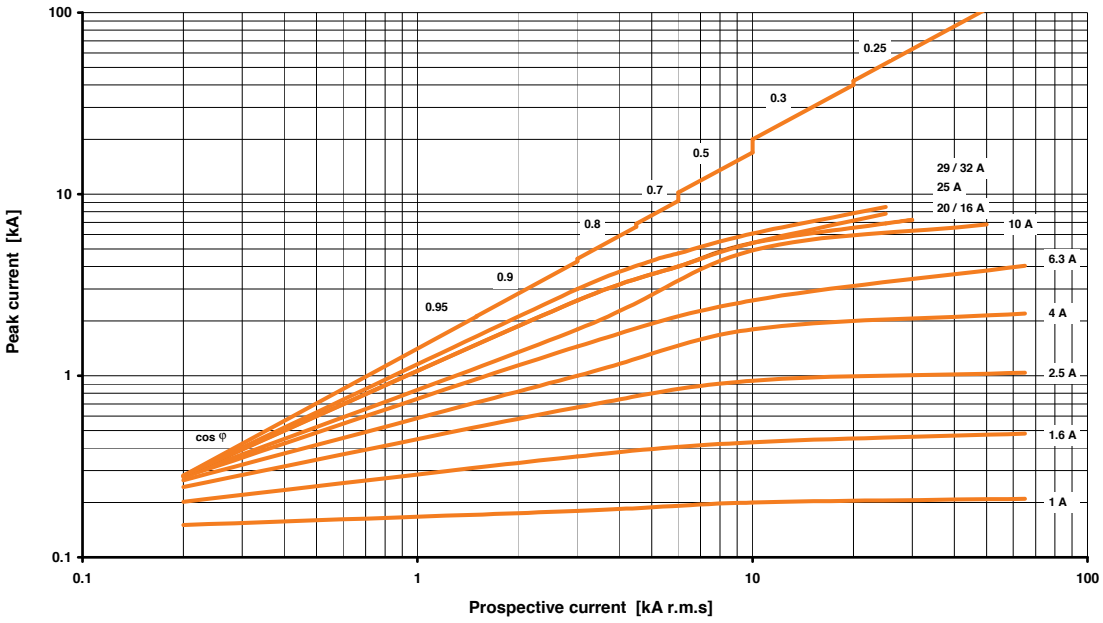

KTA/B/C7-25/32H
Max. Cut-Off Current, U_e = 500V

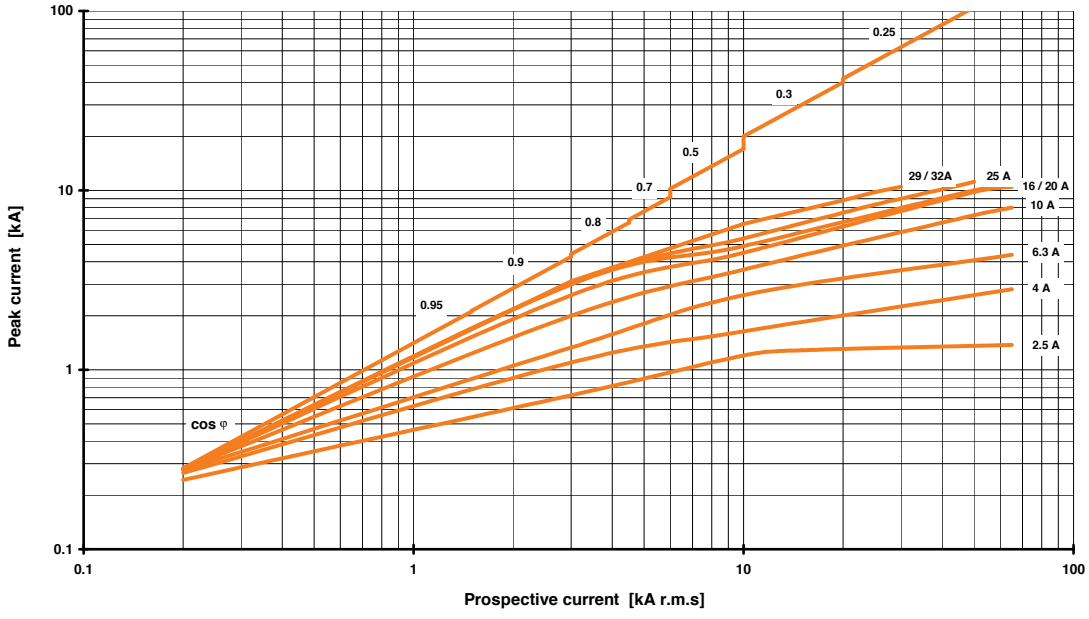

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Cut-off Current ❶

KTA/B/C7-45H
Max. Cut-Off Current, Ue = 500V

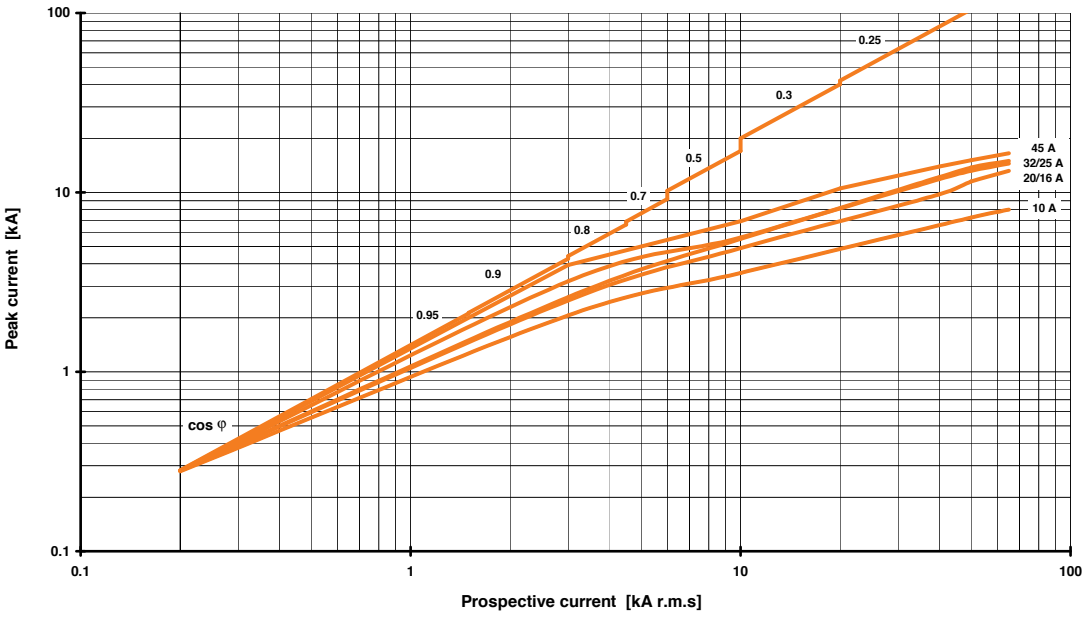

KTV7
Max. Cut-Off Current, U_e = 400…415V

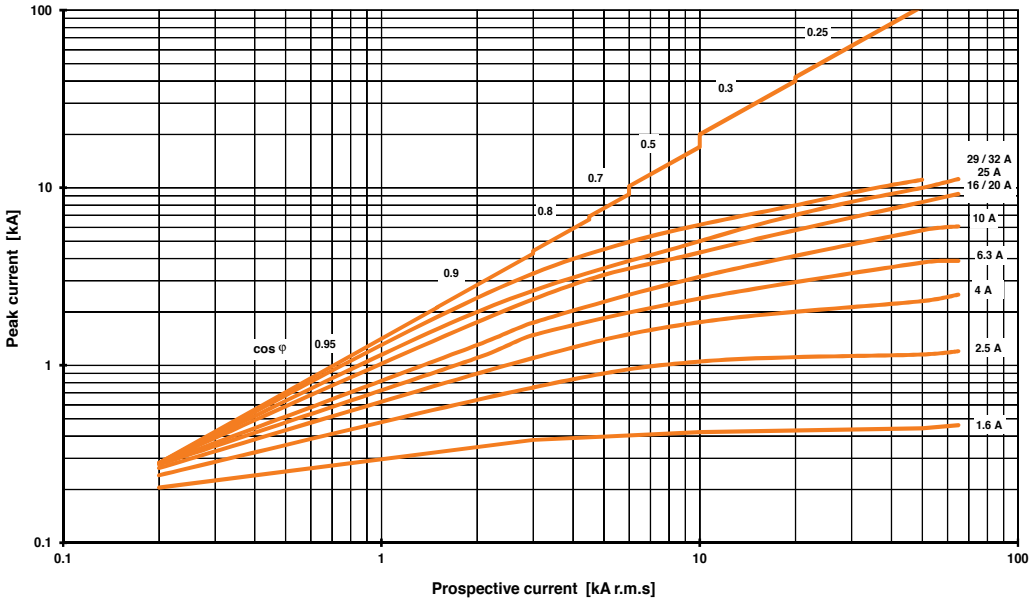

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Let-Through Energy ❶

KTA/B/C7-25/32S
Max. Let-Trough Energy, Ue = 500V

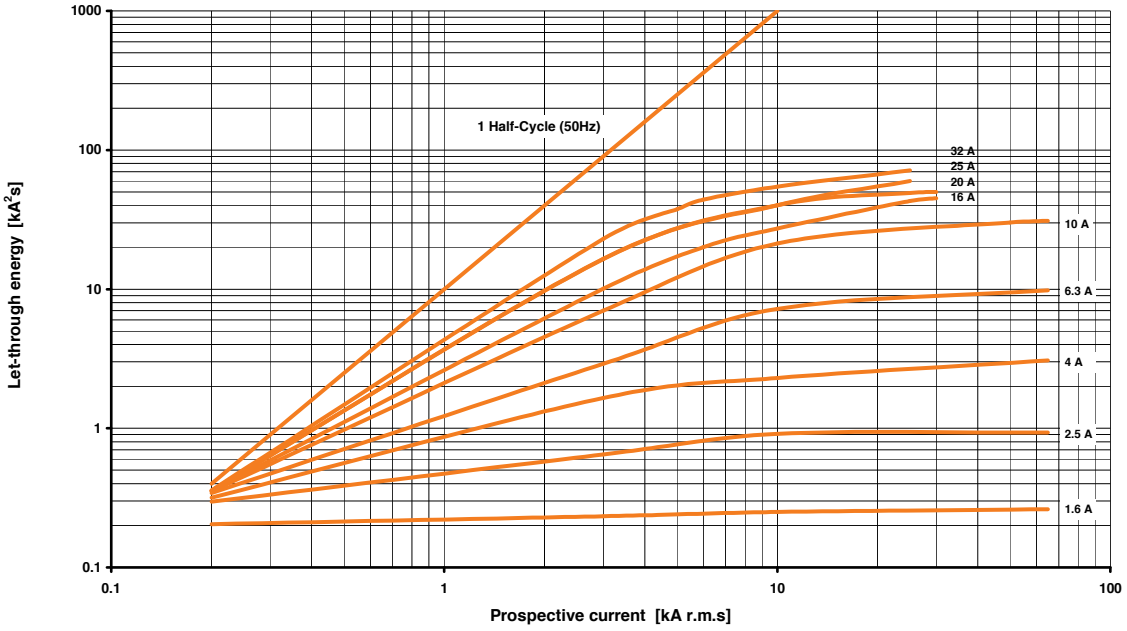

KTA/B/C7-25/32H
Max. Let-Through-Energy, U_e = 500V

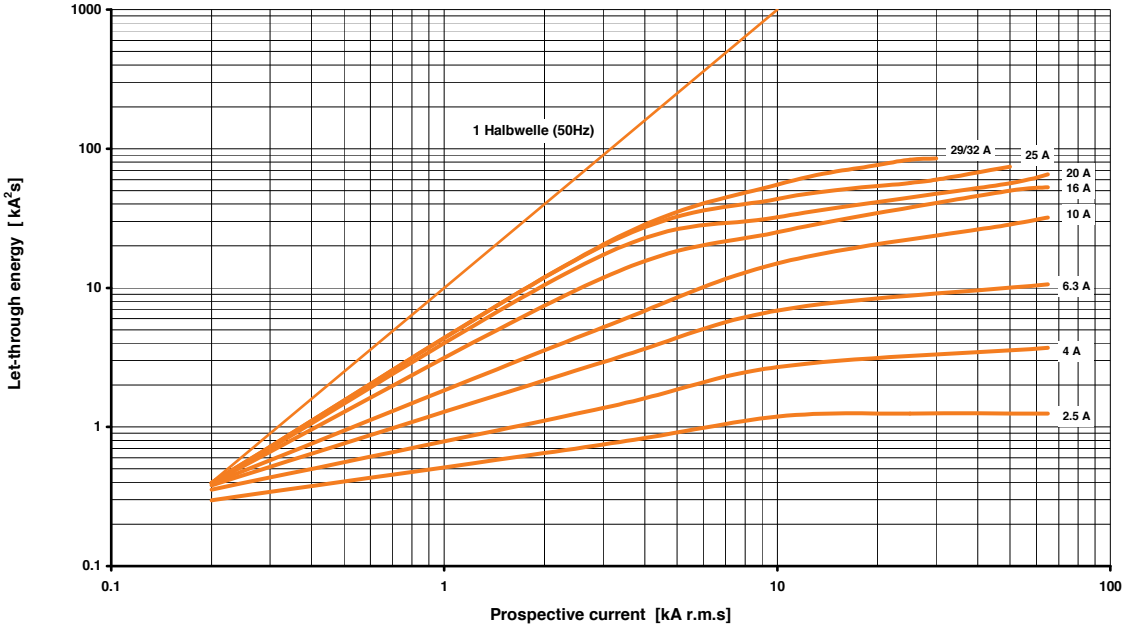

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Let-Through Energy ❶

KTA/B/C7-45H
Max. Let-Through-Energy, U_e = 500V

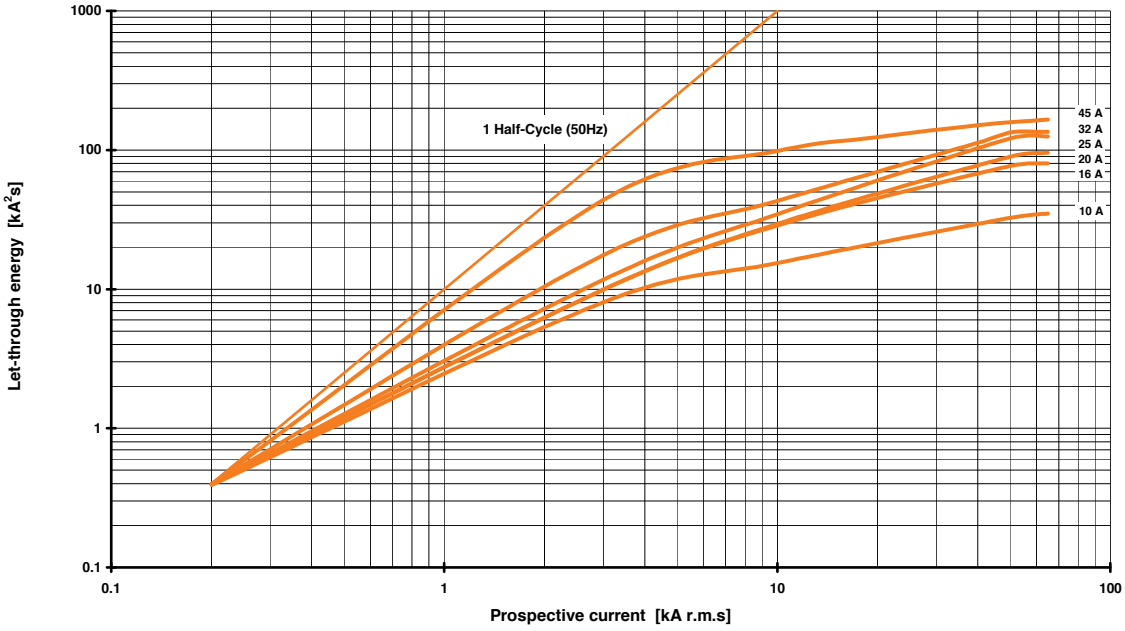

KTV7
Max. Let-Through-Energy, U_e = 400... 415V

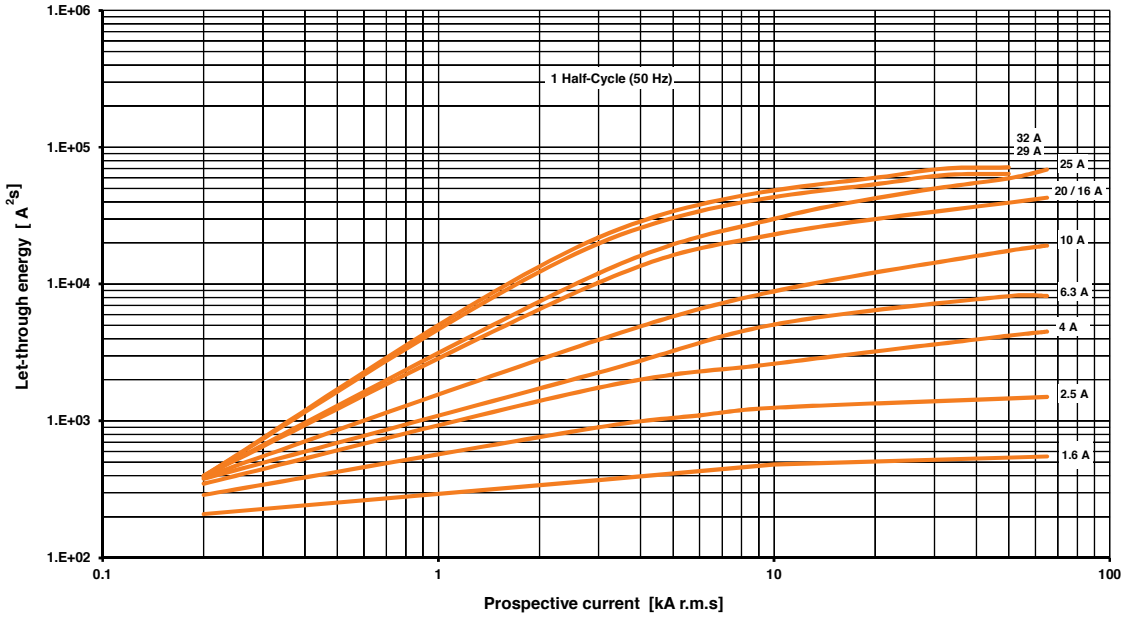

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

KTA7/KTB7 & KTC7 Bus Bar and Supply Blocks

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

KT7-32-A3E



KT7-45-A3E





KT7-32-DB



KT7-45-DB





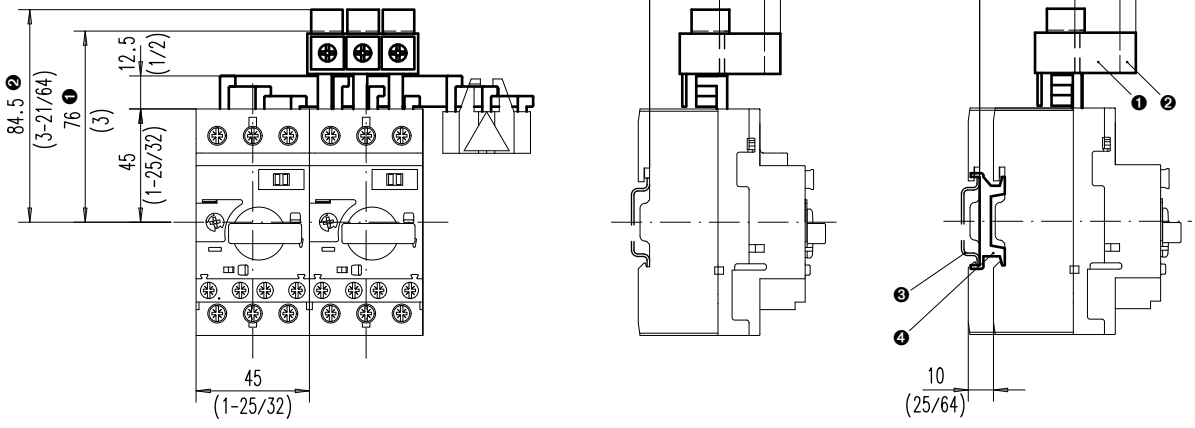

❶ Compact Busbar Feeder Terminal IEC
❷ Compact Busbar Feeder Terminal UL type E and IEC
❸ Mounting on 35 mm DIN Rail
❹ Top Hat Rail Adapter 10 mm

KT_7-25/32 Motor Circuit Controllers *(without Terminal Adaptor KT7-25-TE1)*

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

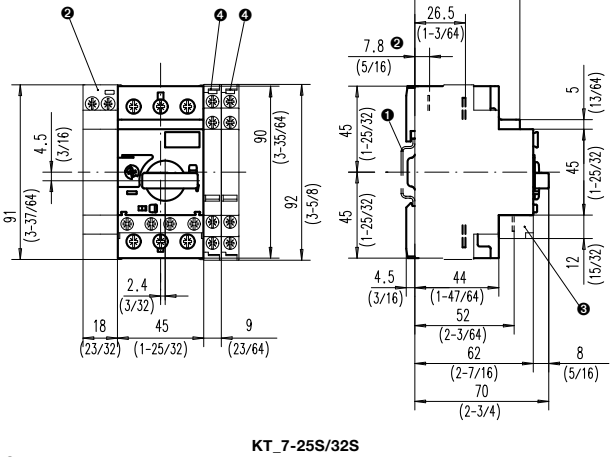

KT_7-25S/32S

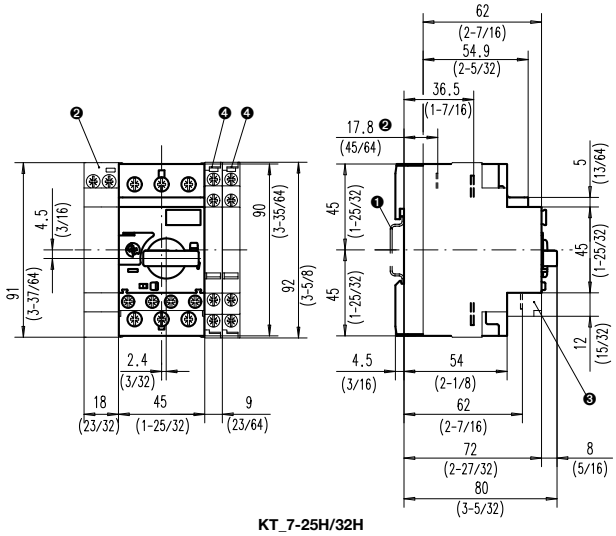

KT_7-25H/32H

❶ Mounting on 35 mm DIN rail
❷ Undervoltage/shunt trip
❸ Auxiliary contact (front mounted)
❹ Auxiliary contact (side mounted)

KT_7-25/32 Motor Circuit Controllers *(with Terminal Adaptor KT7-25-TE1)*

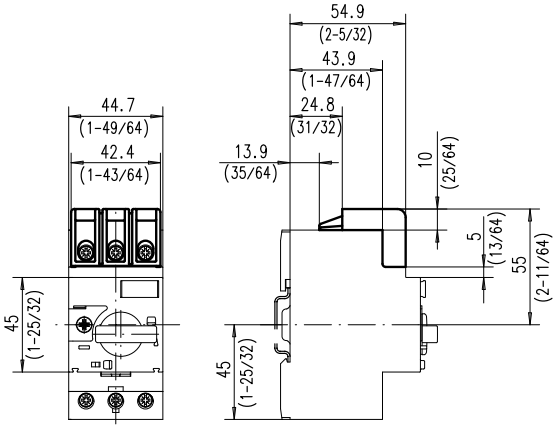

KT_7-25S/32S

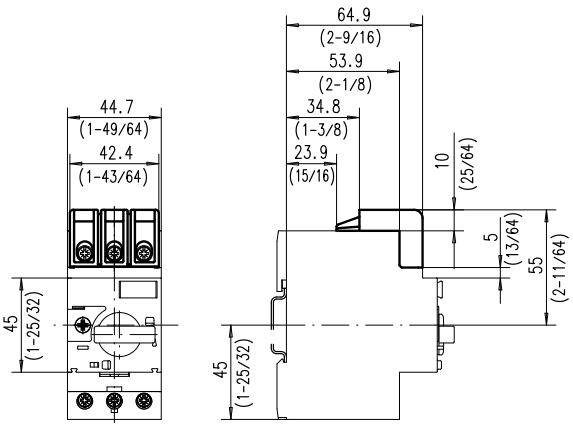

KT_7-25H/32H

KT_7-45H Motor Circuit Controllers *(without Terminal Adaptor KT7-45-TE)*

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

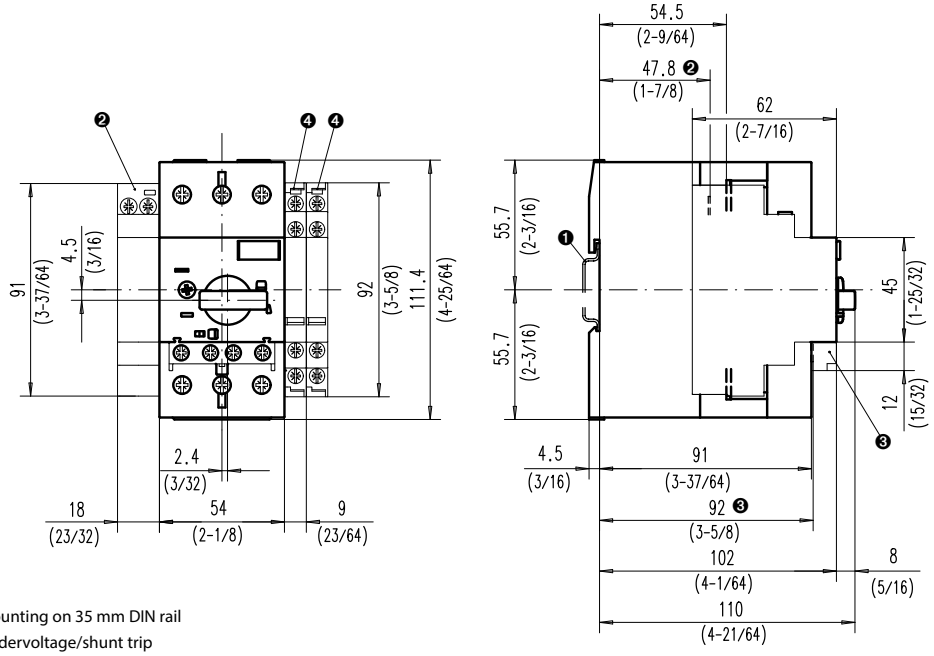

❶ Mounting on 35 mm DIN rail
❷ Undervoltage/shunt trip
❸ Auxiliary contact (front mounted)
❹ Auxiliary contact (side mounted)

KT_7-45H

KT_7-45H Motor Circuit Controllers *(with Terminal Adaptor KT7-45-TE)*

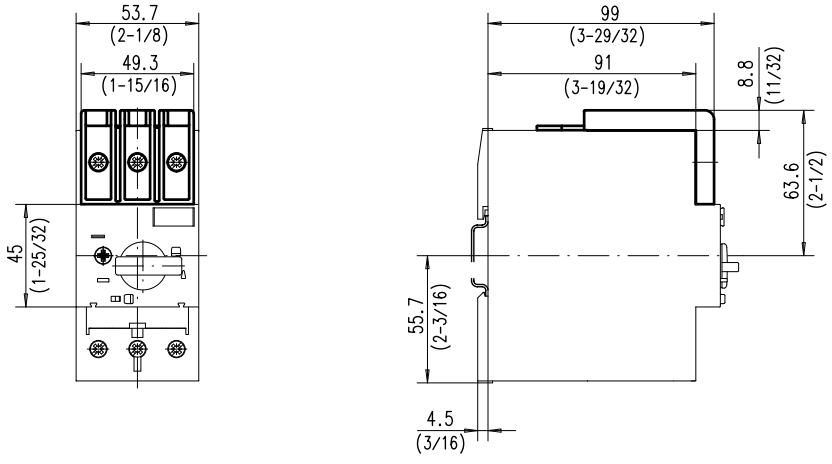

KT_7-45H

KTV7-25/32 Motor Circuit Controllers

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

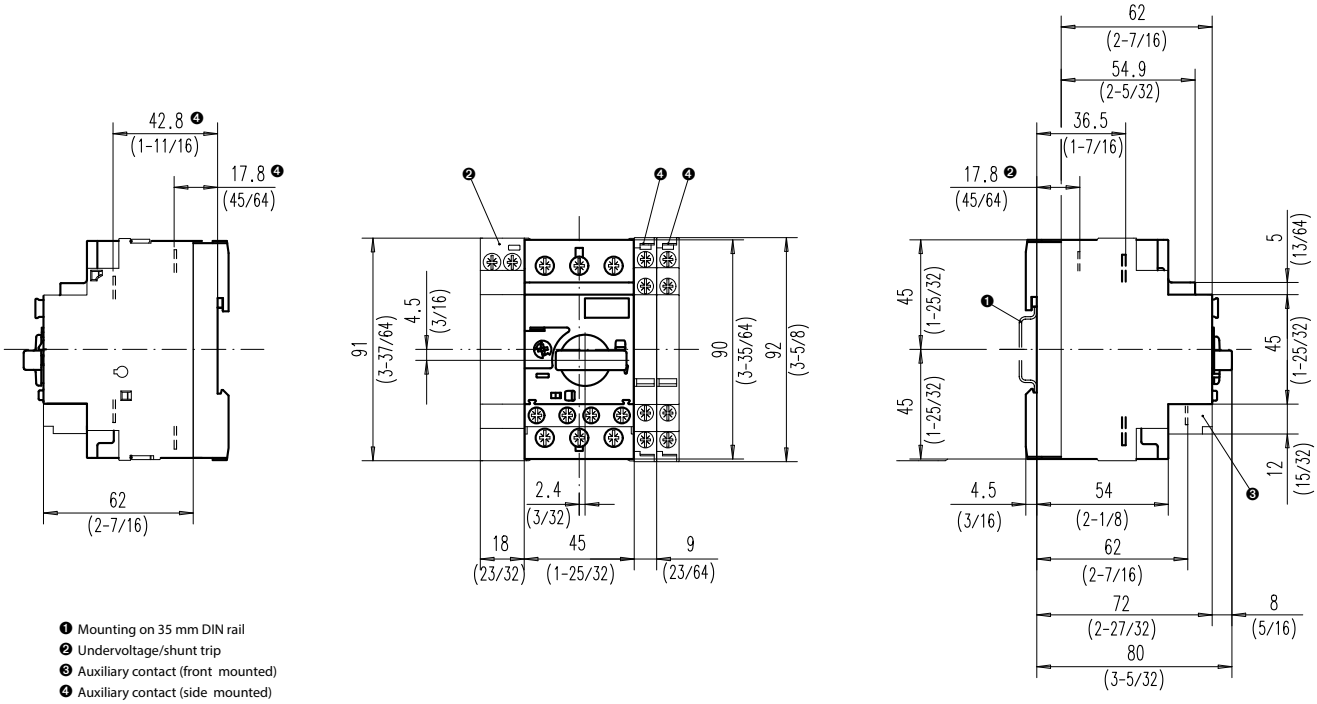

❶ Mounting on 35 mm DIN rail
❷ Undervoltage/shunt trip
❸ Auxiliary contact (front mounted)
❹ Auxiliary contact (side mounted)

Minimum distance to grounded parts or walls



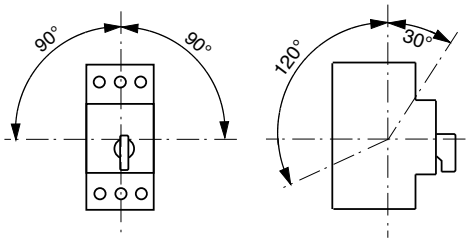

KT7-TE1 Type E adapter on KTV7

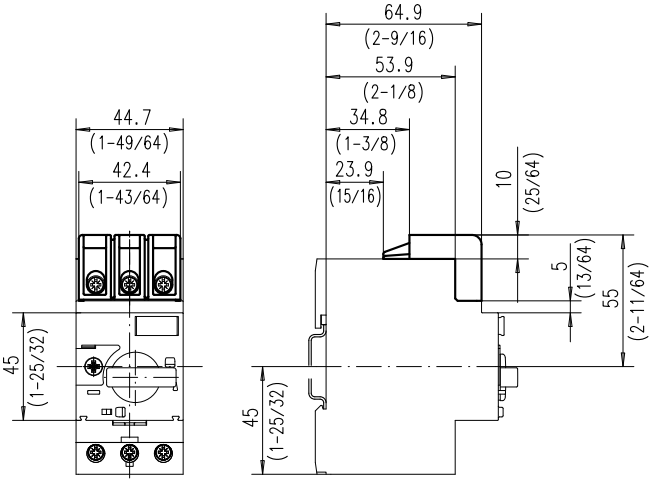

KT7 Motor Circuit Controllers Mounting/Safety Clearance

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

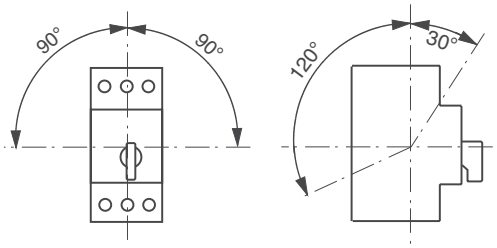

KT_7-25/32



KT_7-45H

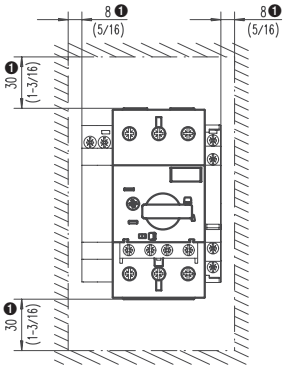

❶ Minimum distance to grounded parts or walls

KT7-45-AS Screw Adapter

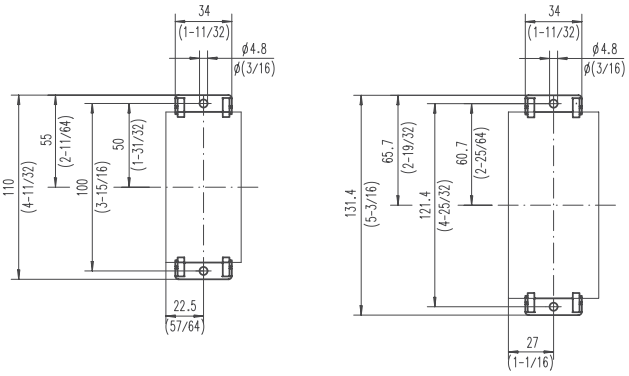

KT7-25-A2E Terminal Block

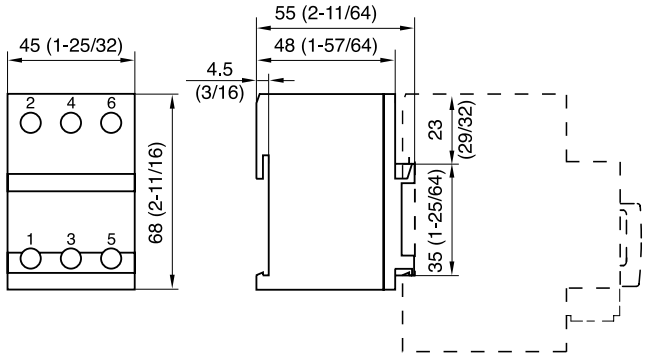

Mounting Position KT7, KTU7

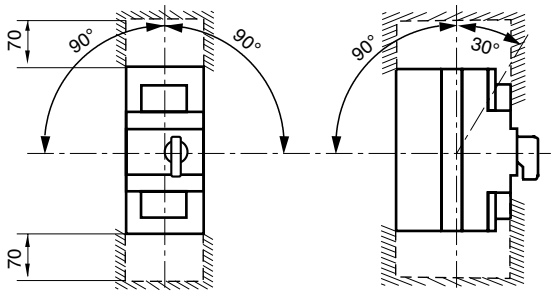

Mounting position/safety clearance

KT7-HTN/HTRY Motor Circuit Controller Door Coupling Handle

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

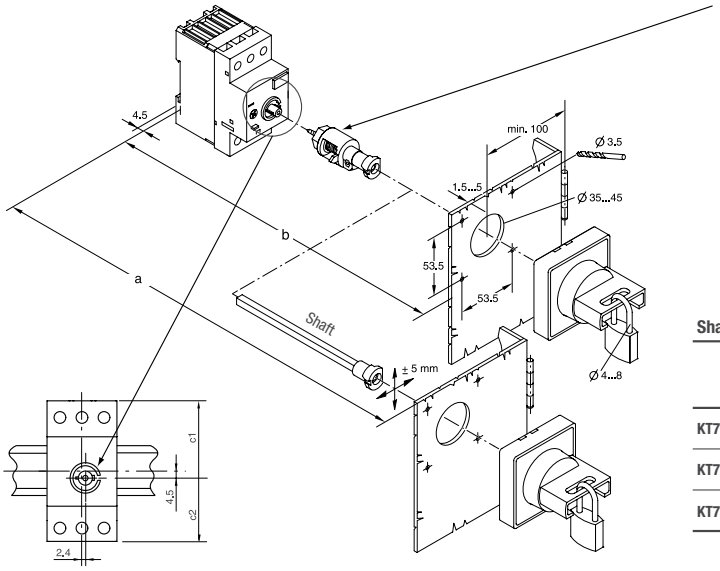

KT7-HTC Coupling is included in Door Handle Kits KT7-HTN and KT7-HTRY. This coupling replaces the knob shipped as standard on the controller. Design "D" Door Coupling Handle Kits include an interface for the "Stops" molded into Design "C" KTA7/KTB7/KTC7 Controllers, which inhibits excessive rotation of the handle mechanism. The old Design "C" Door Handle Kits will fit new Design "C" Controllers (shipped in WHITE boxes), but will not take advantage of the "Stops". Design "D" Door Handle Kits are backward compatible.

Shaft Dimensions

	a		b	c1	c2
	Includes 250mm Shaft KT7-HT	Includes 400mm Shaft KT7-HTL	No Shaft		
KT7-25S/32S	117…338 (4.6…13.3 in)	117…488 (4.6…19.2 in)	105.5 ± 5	49.5	40.5
KT7-25H/32H	126…347 (5.0…13.7 in)	126…497 (5.0…19.6 in)	114.5 ± 5	49.5	40.5
KT7-45H	148.6…369.6 (5.9…14.5 in)	148.6…519 (5.9…20.4 in)	137.1 ± 5	59.35	50.35

If using KT7-SHS Shaft Support see page F41 for dimensions

KTA7/KTB7/KTC7 with CA7 Connection Modules and Kits

Ecombo 1)

KT7-25S-PEC23
KT7-25H-PEC23



Standard Connection Modules 2)

KT7-25S-PNC23
KT7-25H-PNC23



KT7-25H -PNC37



KT7-45H-PNC37



KT7-45H-PNC43



Coil Extension Modules 3)

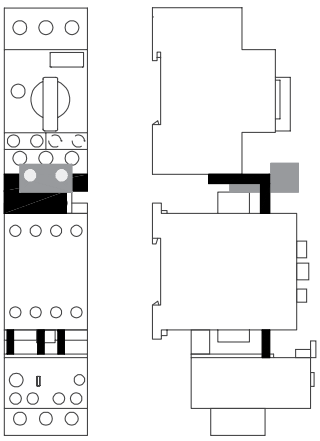

1) Ecombo Modules
Electrical and mechanical connection between motor circuit controller and contactors with AC coil. For CA7-9...23 only. Compatible with the reversing- and WYE-delta starter components.

2) Standard Connection Modules
Electrical connection between motor circuit controller and contactors with AC coil. For CA7-9...43. Compatible with the reversing- and WYE-delta starter components.

3) Coil Extension Modules
Simplifies access to the coil terminals on 3-component starters.
For CA7-9...23 = **KT7-25S-PSC23**
For CA7-30...43 = **KT7-45H-PSC43**

KT7 Handle Assembly with KT7-SHS Shaft Support

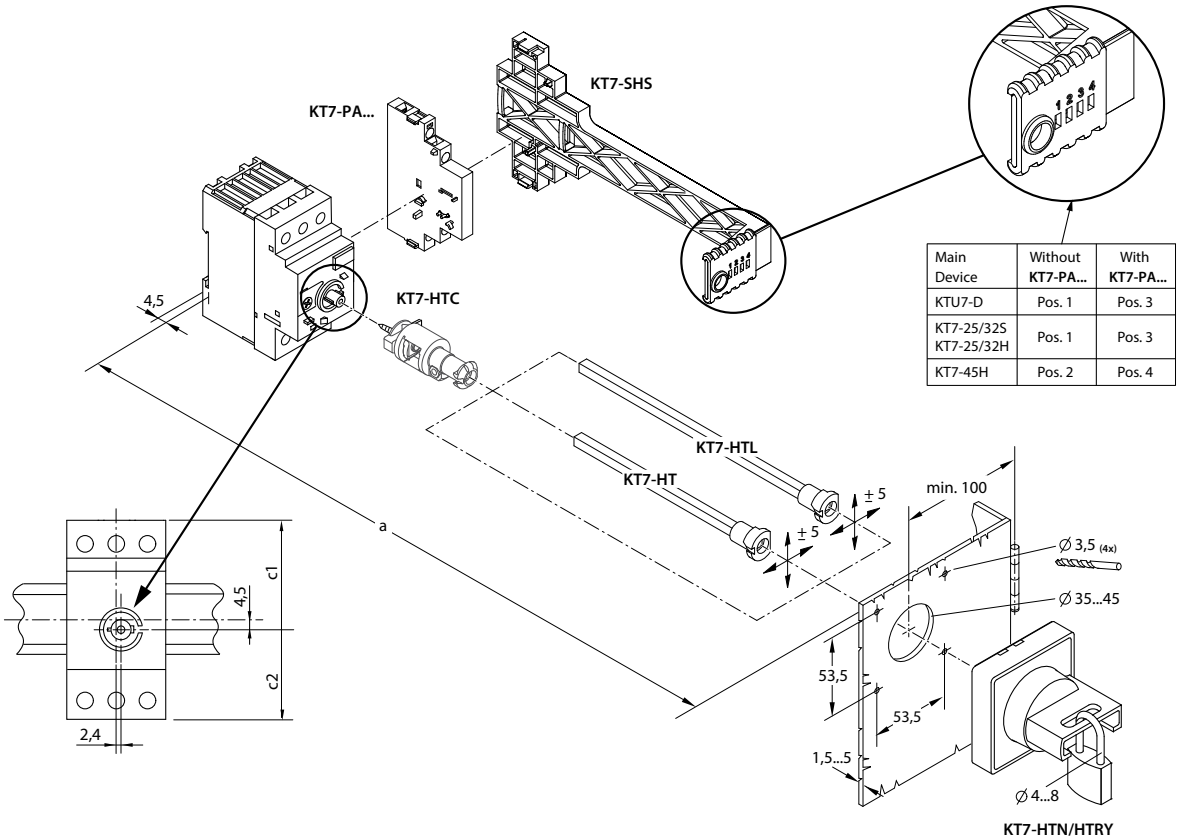

Main Device	Without KT7-PA...	With KT7-PA...
KTU7-D	Pos. 1	Pos. 3
KT7-25/32S KT7-25/32H	Pos. 1	Pos. 3
KT7-45H	Pos. 2	Pos. 4

	a KT7-HT	a KT7-HTL	Use KT7-SHS when a >	c1	c2
KT7-25/32S	117...338	117...488	260	49.5	40.5
KT7-25/32H	126...347	127...497	270	49.5	40.5
KT7-45H	148.6...369.6	148.6...519	300	59.35	50.35
KTU7-D	127...348	127...497	270	55.5	46.5



Assembling Aid

KT7-SHS Shaft Support Dimensions



KT7-SY/SB Switch Handle

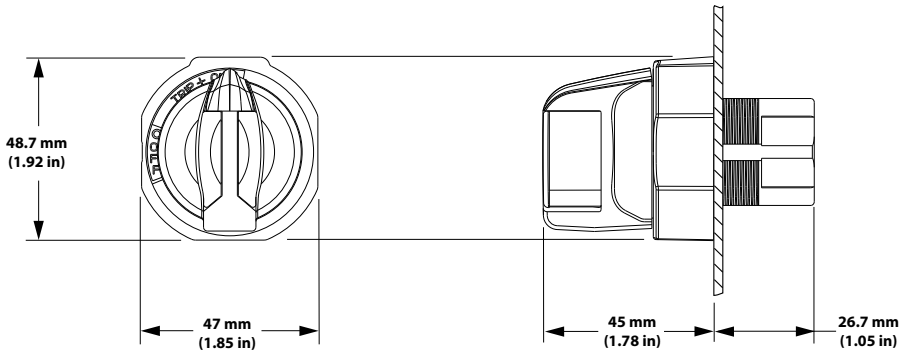

KT7-SY/SB Assembly

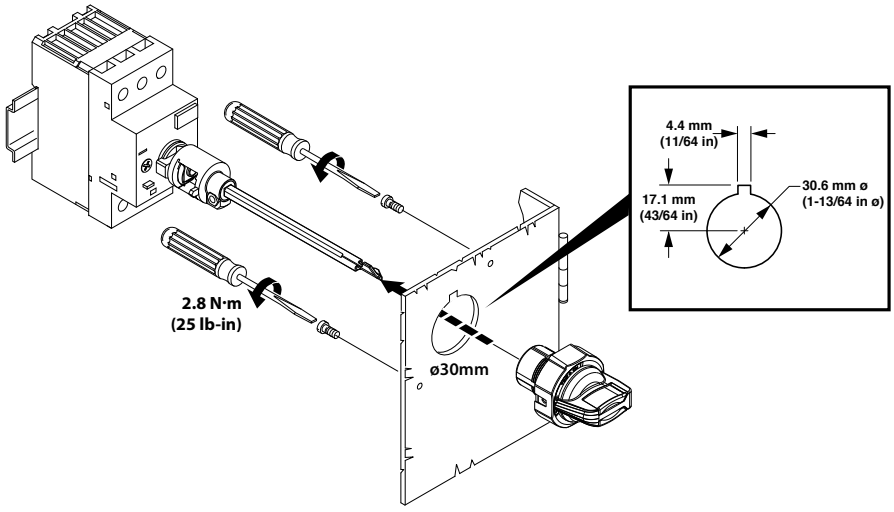

Type W Mounting Modules & Spacer ❶

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

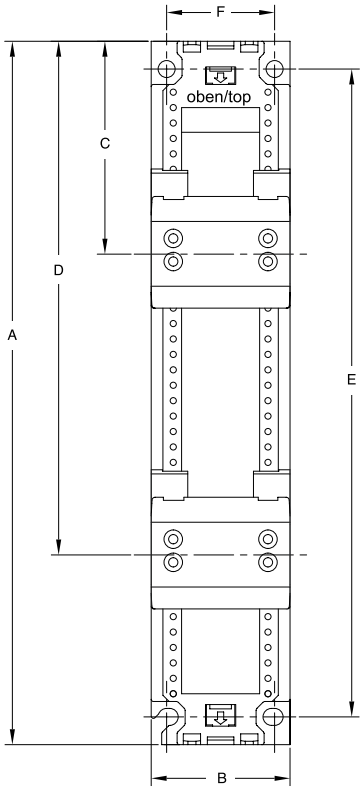

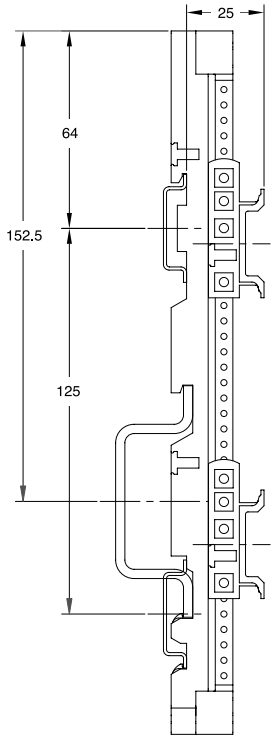

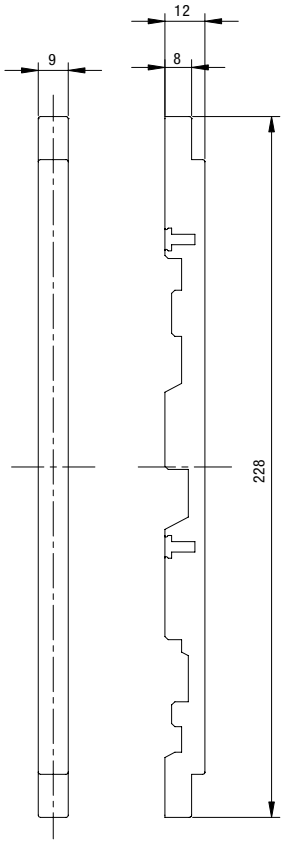

Spacer W-32955

Catalog Number	A	B	C	D	E	F
W-32489	228 (8-31/32)	45 (1-25/32)	69 (2-23/32)	165.5 (6-35/64)	210 (8-17/64)	35 (1-3/8)
W-32490	228 (8-31/32)	54 (2-1/8)	69 (2-23/32)	174 (6-27/32)	210 (8-17/64)	40 (1-37/64)
W-32496	283 (11-9/64)	45 (1-25/32)	69 (2-23/32)	166.5 (6-35/64)	265 (10-7/16)	40 (1-37/64)
W-32497	283 (11-9/64)	54 (2-1/8)	69 (2-23/32)	174 (6-27/32)	265 (10-7/16)	40 (1-37/64)

❶ Use Pozidriv #1 (PZ1) screwdriver on DIN rail screws.

KF7 Fuse Holders Dimensions

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

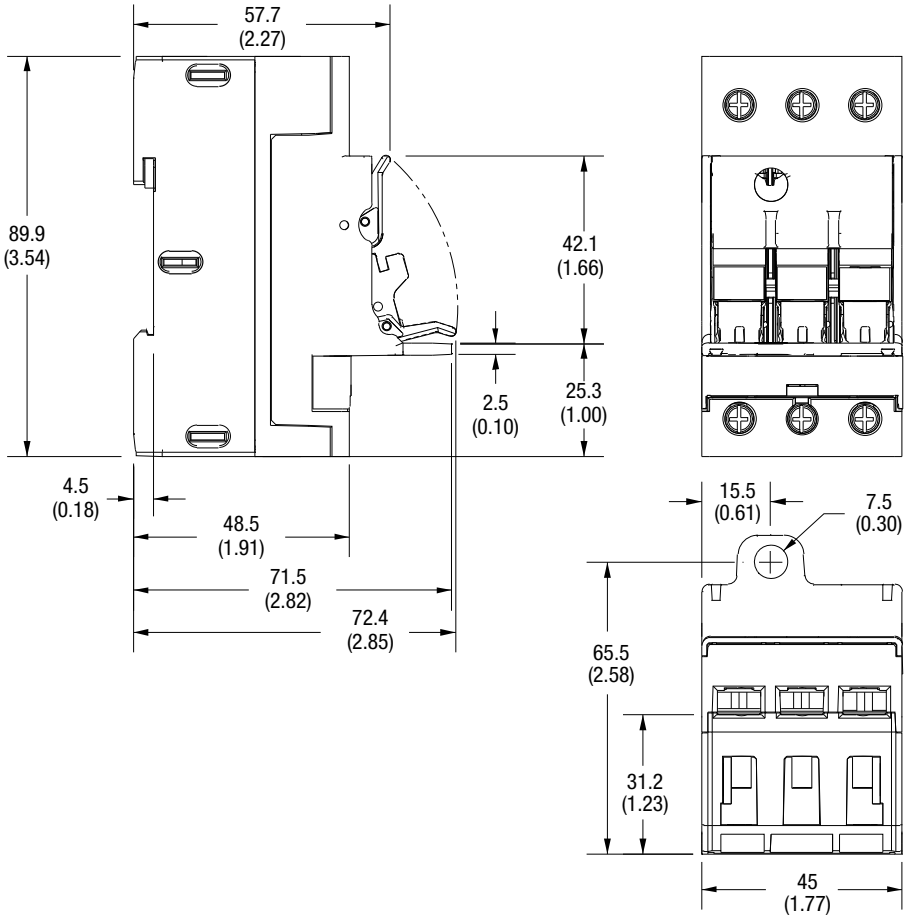

KF7 Fuse Holders Wiring Diagram (IEC)

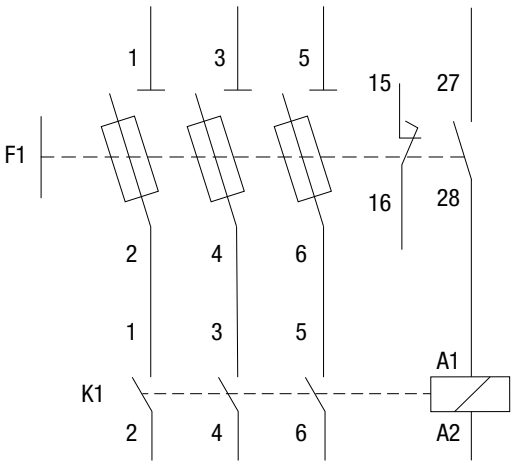

KF7 Fuse Holder used with CA7 Contactor

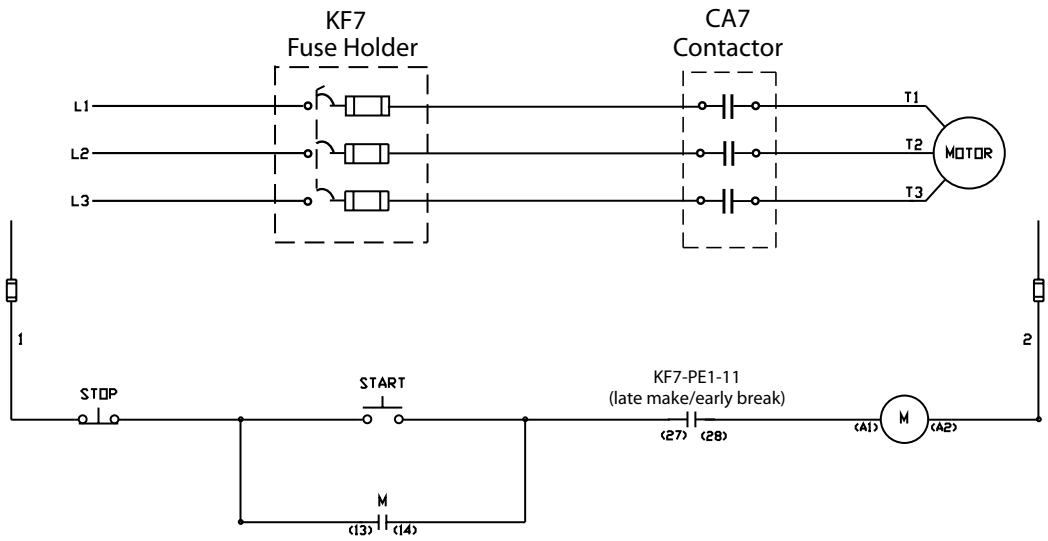

KF7 Fuse Holder used with KTA7 Motor Circuit Controller and CA7 Contactor

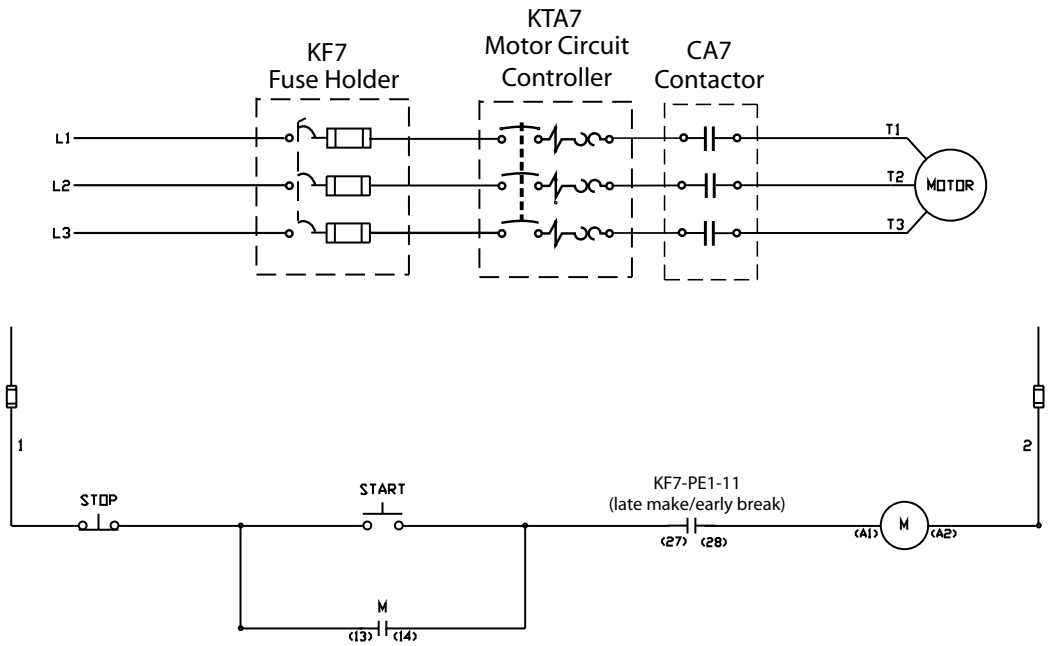

Notes

Series KTU7 UL489 Molded Case Circuit Breakers

Versatile, convenient and space saving… for a variety of applications

Sprecher+Schuh's KTU7 series of UL Molded Case Circuit Breakers are UL489 and CE listed for global applications. The current limiting circuit breaker provides fixed short circuit and overcurrent protection and offers high interrupting ratings for 2- and 3-pole devices from 0.5 to 30A. These Circuit breakers are 100% rated up to 10A.

Accessories are intelligently designed to be field installed. The compact busbars and supply blocks reduce wiring errors and installation labor cost. Connection modules for the CA7 Contactors simplify wiring and can reduce the number of DIN rails required, compacting panel space even further.

Advantages…

- Small foot print saves panel space, just 45 x 102 x 85 mm, up to 50% smaller than traditional MCCBs.
- Interrupt rating of 65kA at 480Y/277V may allow higher overall panel short circuit rating
- Up to 6 times higher interrupting rating vs. traditional miniature circuit breakers.

Ideal Applications…

- Feeder Circuits for small cabinets, distribution panels, branch circuit protection, transformers and heaters
- Control circuits for control circuit transformers and power supplies
- Industrial Heating applications
- Air conditioning and refrigeration applications

Compare these advanced features

KTU7 Circuit Breaker, Fixed Thermal-Magnetic ❷

Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA]			Catalog Number	Price
		240V	480Y/277V	600Y/347V		
KTU7-D — High Interrupting Capacity – 2-Pole						
0.5	15…20xIn	100	100	50	**KTU7-D-2D-0.5** ❶	**339.98**
1.0	15…20xIn	100	100	50	**KTU7-D-2D-1** ❶	**339.98**
2.0	15…20xIn	100	100	50	**KTU7-D-2D-2** ❶	**339.98**
3.0	15…20xIn	100	100	50	**KTU7-D-2D-3** ❶	**339.98**
4.0	15…20xIn	100	100	50	**KTU7-D-2D-4** ❶	**339.98**
5.0	15…20xIn	100	100	50	**KTU7-D-2D-5** ❶	**339.98**
6.0	15…20xIn	100	100	50	**KTU7-D-2D-6** ❶	**339.98**
8.0	15…20xIn	100	100	50	**KTU7-D-2D-8** ❶	**339.98**
10.0	15…20xIn	100	100	50	**KTU7-D-2D-10** ❶	**339.98**
12.0	15…20xIn	65	65	25	**KTU7-D-2D-12**	**339.98**
15.0	15…20xIn	65	65	25	**KTU7-D-2D-15**	**339.98**
20.0	15…20xIn	65	65	25	**KTU7-D-2D-20**	**339.98**
25.0	15…20xIn	65	65	25	**KTU7-D-2D-25**	**339.98**
30.0	15…20xIn	65	65	25	**KTU7-D-2D-30**	**339.98**
KTU7-D — High Interrupting Capacity – 3-Pole						
0.5	15…20xIn	100	100	50	**KTU7-D-3D-0.5** ❶	**485.09**
1.0	15…20xIn	100	100	50	**KTU7-D-3D-1** ❶	**485.09**
2.0	15…20xIn	100	100	50	**KTU7-D-3D-2** ❶	**485.09**
3.0	15…20xIn	100	100	50	**KTU7-D-3D-3** ❶	**485.09**
4.0	15…20xIn	100	100	50	**KTU7-D-3D-4** ❶	**485.09**
5.0	15…20xIn	100	100	50	**KTU7-D-3D-5** ❶	**485.09**
6.0	15…20xIn	100	100	50	**KTU7-D-3D-6** ❶	**485.09**
8.0	15…20xIn	100	100	50	**KTU7-D-3D-8** ❶	**485.09**
10.0	15…20xIn	100	100	50	**KTU7-D-3D-10** ❶	**485.09**
12.0	15…20xIn	65	65	25	**KTU7-D-3D-12**	**485.09**
15.0	15…20xIn	65	65	25	**KTU7-D-3D-15**	**485.09**
20.0	15…20xIn	65	65	25	**KTU7-D-3D-20**	**485.09**
25.0	15…20xIn	65	65	25	**KTU7-D-3D-25**	**485.09**
30.0	15…20xIn	65	65	25	**KTU7-D-3D-30**	**485.09**

Description

The KTU7 is a fixed trip, thermal-magnetic UL489 Molded Case Circuit Breaker.

KTU7-D-2D-10

KTU7-D-3D-10

❶ Suitable for continuous operation at 100% of rating only if used in minimum enclosure space of 250 x 175 x 150 mm (10 x 7 x 6 in).
❷ KTU7 has independent thermal elements suitable for power distribution applications (not two slide bar differential tripping).

KT7 Accessories available for KTU7-D

	KT7-PE1 or KT7-PEF1 **Front Mount Auxiliaries and Trip Contacts** See page F12		**KT7-KN1, KT7-KRY1 or KT7-DS** **Lockable Twist Knob & Locking Tag** See page F16
	KT7-UA or KT7-AA **Undervoltage Trips and Shunt Trips ❶** See page F14		**Handle Assemblies** **KT7-SY or KT7-SB** **KT7-HTN or KT7-HTRY ❷** See page F15
	**KT7-HT/HTL, KT7-S_/N_ & KT7-SHS** **Extension Shafts & Support** See page F15		**KT7-45-AS** **Screw Adaptor** See page F16

Remote Operation Application
The KTU7 3-Pole unit can be combined with CA7 using Connector Modules to achieve remote operation.
- For CA7-9…23 use KTU7-D-PEC23
- For CA7-9…43 use KTU7-D-PF

Extension Shaft Support Assembly
The KT7-SHS is recommended for handle shafts KT7-HT_ or KT7-S_/N_ in lengths greater than 200mm (7.8 inches).
See page F41

❶ Series B or later.
❷ Series E or later.

Connecting Modules *(for connecting KTU7 to CA7 AC coil, or CA7 Electronic DC coil contactors)*

Module	Description	For Connecting. . .	To Contactor. . .	Catalog Number	Price
	Connecting Modules • 25 Amp maximum • Provides electrical and mechanical interconnection of KTU7 3-Pole and CA7 (with AC coils) or CA7-_E (with 12V or 24V Electronic DC coils) • KTU7 and Contactor mount on one DIN rail (see previous page for visual)	KTU7-D	CA7-9..23	**KTU7-D-PEC23** ❶	**52.03**
	Flexible Connecting Module • 32 Amp maximum • Provides electrical and mechanical interconnection of KTU7 and CA7 (with AC coils) or CA7-_E (with 12V or 24V Electronic DC coils) • Contactor and KTU7 separately mounted	KTU7-D	CA7-9..43	**KTU7-D-PF** ❶	**52.03**

Compact Busbar System for KTU7-D

Accessory	Description	For Use With	Catalog Number	Price
	Compact Busbar — 45 mm Spacing (Rated 64 A) • For use with front-mounted auxiliary contact Connects 2-KTU7s Connects 3-KTU7s Connects 4-KTU7s Connects 5-KTU7s (shown)	KTU7-D-3D ❶	**KTU7-D-DB-45-2** **KTU7-D-DB-45-3** **KTU7-D-DB-45-4** **KTU7-D-DB-45-5**	**51.10** **58.87** **66.44** **74.01**
	Supply Block and Terminal • For power connection to Compact Busbar — 600V, KTU7-D…120A maximum • Top feed — overlaps commoning link • Meets requirements for terminal spacing from source • Compliant with UL489 Terminal Clearance standards	KTU7-D-3D ❶	**KTU7-D-A3E**	**54.31**
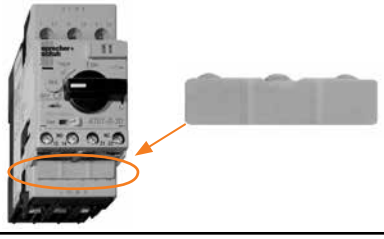	**Load Terminal Cover** • For UL 489 compliance of front mounted auxiliary contacts when installed on KTU7 • The cover packaged in quantities of 10 (must order 10 for one package of 10)	KTU7	**KT7-PEFC**	**6.50**

❶ For use with KTU7 3-pole Circuit Breakers only.

Application Rating Chart

KTU7	High Fault SCCR			Switching Lighting Rated		
	Combined with ❶	480Y/277 VAC (KA)	600Y/347 VAC (KA)	Fluorescent ❷	High-intensity Discharge ❸	HVAC Rated ❹
KTU7-D-2D-0.5	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-1	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-2	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-3	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-4	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-5	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-6	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-8	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-10	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-12	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-15	CA7-9…23	65	35	SWD	HID	HARC
KTU7-D-2D-20	CA7-9…23	65	35	SWD	HID	HARC
KTU7-D-2D-25	CA7-9…30	65	35	~	HID	HARC
KTU7-D-2D-30	CA7-9…30	65	35	~	~	HARC
KTU7-D-3D-0.5	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-1	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-2	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-3	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-4	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-5	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-6	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-8	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-10	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-12	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-15	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-20	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-25	CA7-9…30	65	35	~	HID	HARC
KTU7-D-3D-30	CA7-9…30	65	35	~	HID	HARC

IEC Performance Data

(CSA C22.2, UL 489, IEC / EN 60947-1, -2 in connection with a short-circuit protection device

			KTU7-D- 2 pole & 3 pole													
			0.5A	1A	2A	3A	4A	5A	6A	8A	10A	12A	15A	20A	25A	30A
Rated Operational Current I_n		[A]	0.5	1	2	3	4	5	6	8	10	12	15	20	25	30
Fixed Thermal Trip $I_r = I_n$		[A]	0.5	1	2	3	4	5	6	8	10	12	15	20	25	30
Fixed Magnetic Trip $I_m =$		[A]	15…20 x I_n													
Ultimate Short Circuit Breaking Capacity (50 Hz) I_{cu}	230…240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	100	100	100
	400…415V	[kA]	100	100	100	100	100	100	100	100	100	65	65	65	65	65
	525V	[kA]	65	65	65	65	65	65	65	65	65	65	65	65	65	65
	690V	[kA]	50	50	18	18	18	18	18	10	10	10	10	10	10	10
Rated Service Short Circuit Breaking Capacity (50 Hz) I_{cs}	230…240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	100	100	100
	400…415V	[kA]	65	65	65	65	65	65	65	65	65	50	50	50	50	50
	525V	[kA]	65	65	65	65	65	65	65	65	65	50	50	50	25	25
	690V	[kA]	50	50	10	10	10	10	10	6	6	6	6	6	6	6

❶ KTU7 + CA7-9…23 contactor maybe combined with CEP7 overload. SCCR ratings remain unchanged.

❷ KTU7 circuit breaker intended to switch fluorescent lighting on a regular basis. Selection of sizes limited by UL489. Devices marked with “SWD”.

❸ KTU7 Circuit Breakers intended to switch high-intensity discharge (ballast) lighting devices marked with “HID”.

❹ Rated for use with heating, air conditioning, refrigeration. Devices marked with “HARC”.

General Data

		KTU7-D
Number of Poles		2 and 3
Rated Insulation Voltage U_i		
IEC, / EN	[V]	600
UL, CSA	[V]	600
Ratings		HACR
Suitable for continuous operation at 100% of rating only if used in enclosure space for		0.5…15 A, enclosure space 250 x 175 x 150 mm (10 x 7 x 6 in)
Rated Impulse Withstand Voltage U_{imp}		
Pollution degree		3
Main circuits U_{imp} /Overvoltage Category		6 kV/III
Auxiliary circuits U_{imp} /Overvoltage Category		6 kV/III
Safe separation between main and auxiliary circuits		up to 400V
Rated Frequency	[Hz]	50/60
Utilization Category		
• IEC 60947-2 (Circuit Breaker)		A
Life Span		
Mechanical	[operations]	100,000
Electrical (I_e max.)	[operations]	10,000
Switching Frequency	[operations/h]	max. 25
Ambient Temperature		
Storage	[°C]	-40…+80
Operation	[°C]	-25…+60 (70 with 15% I_n current reduction)
Resistance to Climatic Change		
Moisture / Heat Resistance	(600068-2-30)	23 °C / 83 % relative humidity and 40 °C / 92 % relative humidity, 56 cycles
Dry Heat	(60086-2-2)	100 °C, relative humidity <50 %, 7 days
Moisture / Change Resistance	(60086-2-3)	40 °C, relative humidity 93 %, 56 days
Site Altitude	[m]	to 2000 N.N.
Protection Class		IP2X, when wired
Resistance to Shock	Transport (60068-2-27)	30 g, 11 ms, all axes
Resistance to Vibration	Operation (60068-2-6)	18 g
Overload Protection		
Phase-loss protection		No phase loss protection
Short circuit protection (Magnetic)		Fixed setting 10…20 x I_n
Main Disconnect Switch Application		Yes, with accessories
Application Conditions		For utilization outside North America, Assemblies (of products) shall comply to the IEC61439-1 requirements KTU7 circuit breakers are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments.
Standards		UL489; CSA C22.2 No. 5; IEC / EN 60947-1, -2
Certifications		CE; cULus listed Circuit Breaker, File No. E334037 and E33916 (accessories)

Terminal Specifications

			KTU7-D
Terminal Parts Terminal Type			
Screwdriver			Pozidrive No. 2 / Blade No. 3
	1. conductor	[mm²]/[AWG]	1…6/—
	2. conductor	[mm²]/[AWG]	1…4/—
	1. conductor	[mm²]/[AWG]	1…6/—
	2. conductor	[mm²]/[AWG]	1…6/—
	1. conductor	[mm²]/[AWG]	—/No. 18…10
	2. conductor	[mm²]/[AWG]	—/No. 18…10
	1. conductor	[mm²]/[AWG]	1…6/No. 18…10
	2. conductor	[mm²]/[AWG]	1…6/No. 18…10
Tightening Torque		[N•m]/[lb•in]	2…2.5/18…22
Weight		[g]	395

			KTU7-D-A3E
Use 75 °C Cu wire only			
Rated Thermal Current I_{th}		[A]	64
	1. conductor	[mm²]/[AWG]	2.5…25/14…4
	1. conductor	[mm²]/[AWG]	2.5…25/14…4
	1. conductor	[mm²]/[AWG]	2.5…25/14…4
	1. conductor	[mm²]/[AWG]	2.5…25/14…4
Tightening Torque		[N•m]/[lb•in]	3…3.5/27…31

Time-Current Characteristic

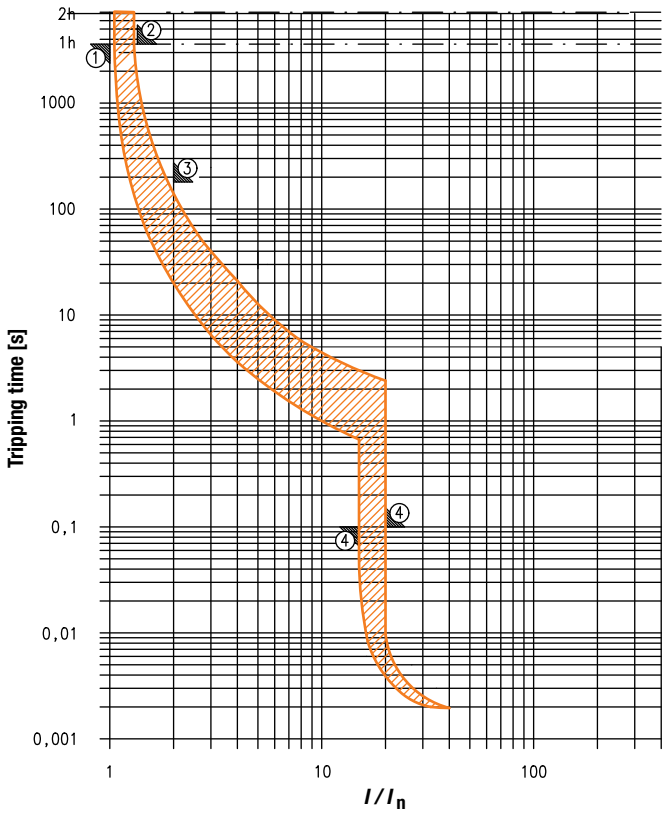

Tripping characteristic
acc. to UL 489 and IEC 60947-2
① conventional non-tripping
current Int = 1.0 In
② conventional tripping current
It = 1.35 In : t = <1h
③ 2.0 In : t = 180s max.

Instantaneous tripping
acc. to UL 489 and IEC 60947-2
④ Trip Curve : 15…20 In

Maximum Cut-off (Let-Through) Current

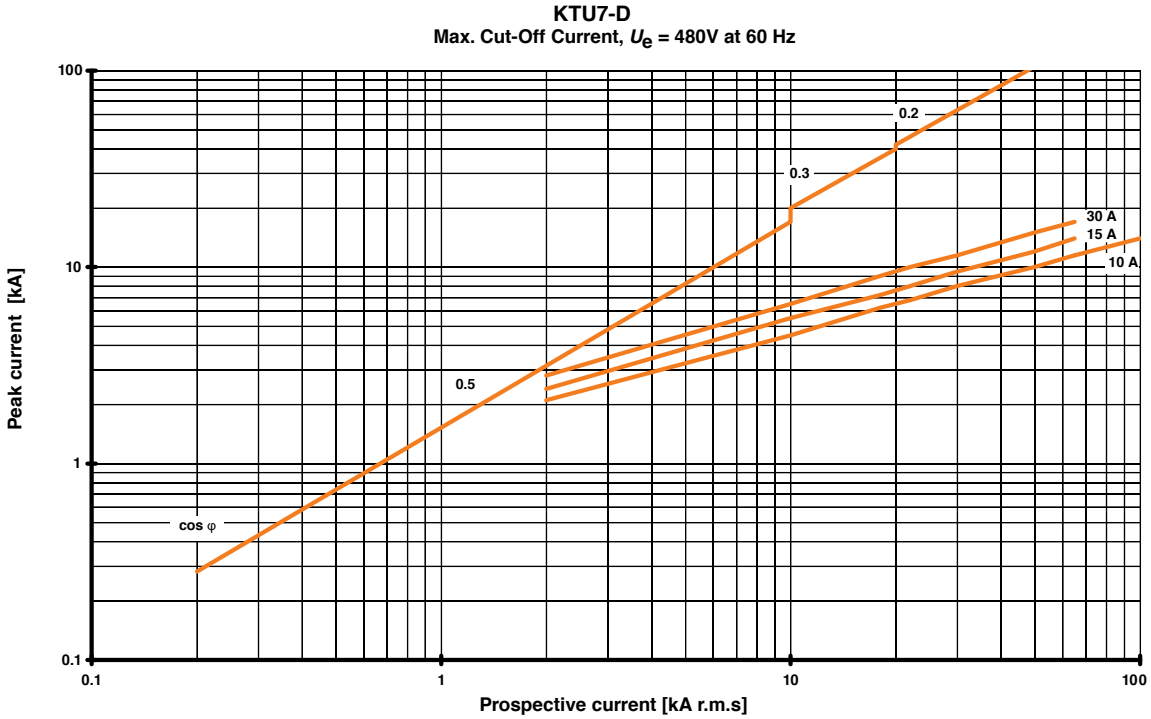

Maximum Let-Through Energy

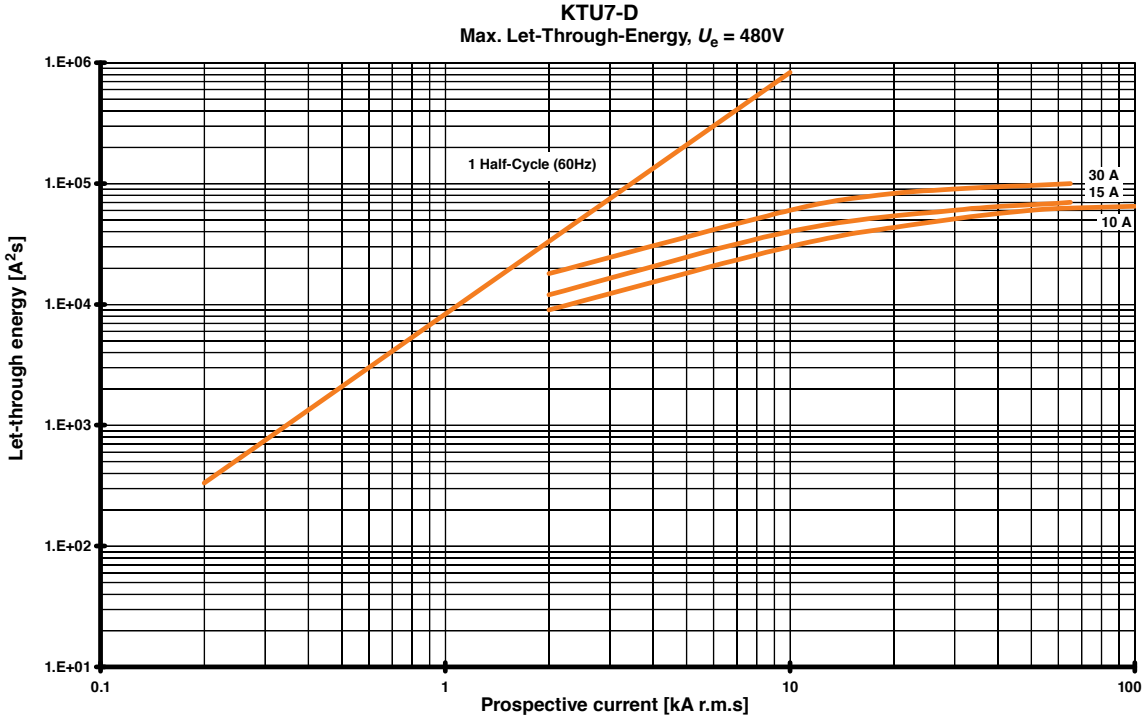

KTU7-D Dimensions

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

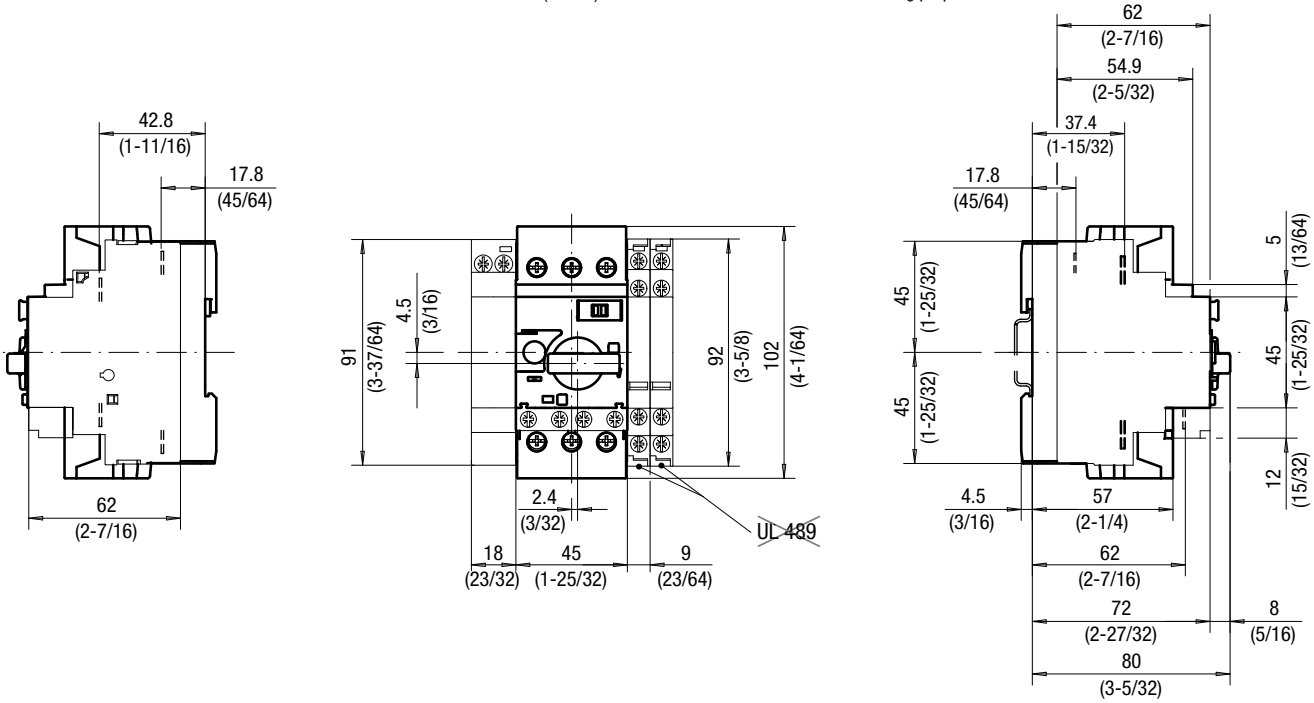

KTU7 Circuit Breaker Enclosure Requirements

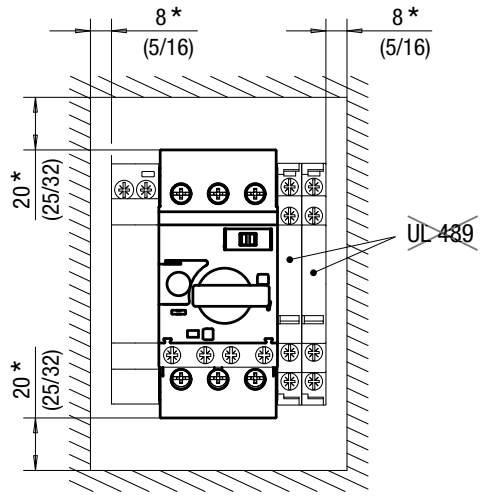

*) - Minimum distance to grounded parts or walls

KTU7 Wiring Diagram

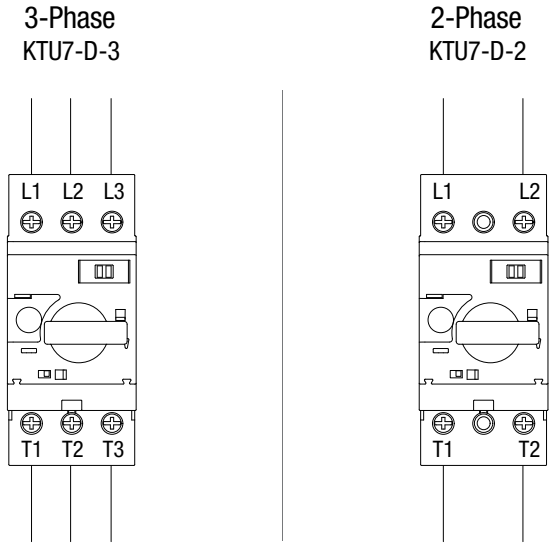

KTU7 with Busbar

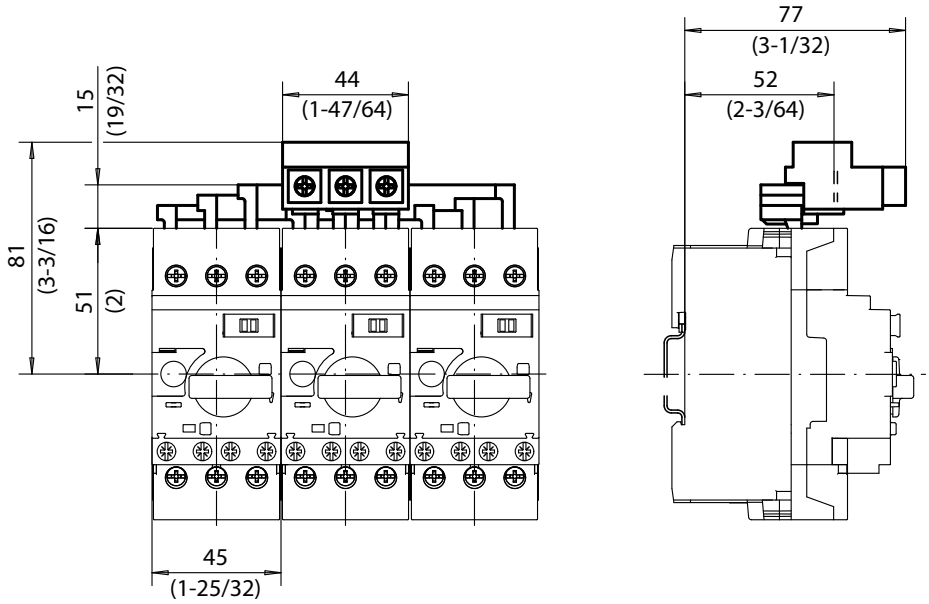

KTU7 with Screw Adaptor KT7-45-AS

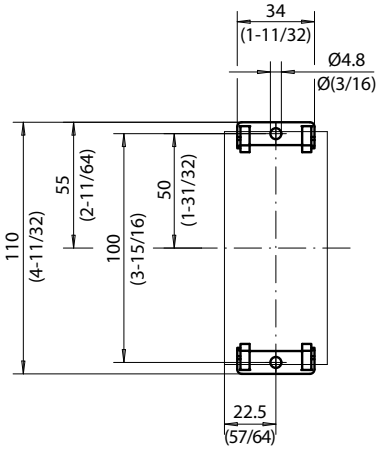

KTU7 Mounting Position

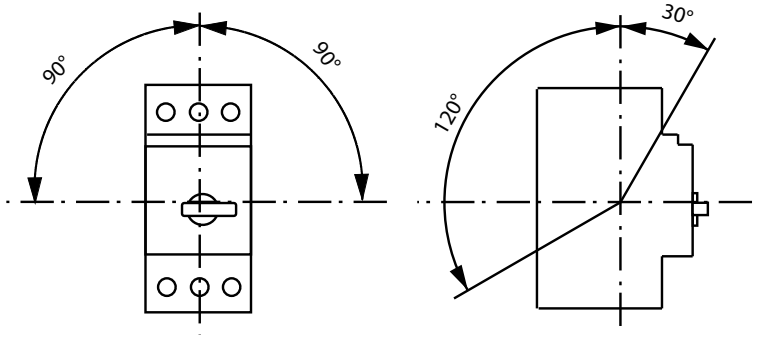

Notes

Ecombo and EcomboPlus Starters

Save space, save money in individual or multi-motor starter applications

See our online white paper

Methods of Applying KT7

Motor Circuit Controllers

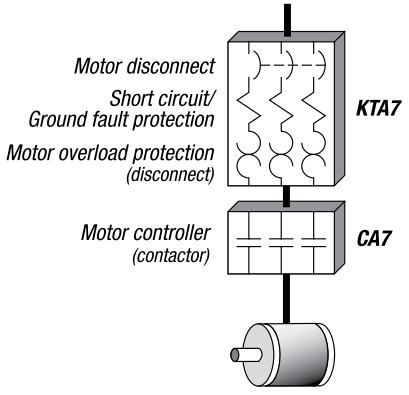

The Ecombo starter line combines a KTA7 self-protected Type E combination controller with a CA7 contactor to form a cost effective compact Type E/F alternative to traditional combination starters.

Sprecher + Schuh's Ecombo and EcomboPlus starters are the compact alternative to larger and higher priced combination starters. Both models consist of a KTA7 Motor Circuit Controller (cULus listed as a Type E, self-protected combination starter), assembled with a CA7 or CA8 contactor, which provides remote operation (Type E/F). Whether used as a standalone starter or in multi-motor starter applications, Ecombo and EcomboPlus starters save significant panel space and dollars over conventional combination starter alternatives.

Control and protection for most industrial applications

The Ecombo starter line covers motors to 45 amperes, while providing current limiting short circuit protection up to 65kA. Class 10 thermal overload protection is also assured with a very accurate current adjustment setting which is factory calibrated to the smallest and largest current the unit can handle. A "differential tripping" mechanism also provides accelerated tripping under single phase conditions (see illustration on page F3). Ecombo starters may be selected as Type 2 Coordinated per IEC 60947-4-1, or UL Construction Type E or F.

The Ecombo starter…

Ecombo starters (CL7) come standard with a KTA7 Motor Circuit Controller connected to Sprecher + Schuh's CA7 contactor (or CA8 mini contactor) through a specially designed connection module. The unit is DIN-rail mounted. Contactor coil connections are at the bottom of the starter to provide attractive and cost effective panel wiring. Ecombo starters may also be purchased with just three parts and assembled by the user to further increase economy. The CLT7 is a three component starter with a KTB7 controller, CA7 contactor, and a CEP7 solid state overload relay, pre-assembled on a bus bar module and ready to mount to a DIN rail or panel.

CL7 Ecombo starter

CK7 EcomboPlus starter

CLT7 Three-Component starter

Ecombo*Plus*… the complete solution

The EcomboPlus starter (CK7) is factory assembled on a special socket base that provides support and allows the starter to be mounted on one or two DIN-rails or screw mounted. Each starter comes standard with a front mounted auxiliary trip contact that is pre-wired to a built-in terminal block at the bottom of the unit. Contactor coil connections are also at the bottom of the starter to provide attractive and cost effective panel wiring.

Reduce panel size, complexity and cost

Because KT7 Motor Circuit Controllers are UL listed as self-protected combination starters, NEC / CEC group motor rules are simplified substantially. In many cases, only a non-fused switch is required for panel disconnect. See our online white paper "Methods of Applying KT7 Motor Circuit Controllers", which explains applying KT7s in multi-motor starter applications.

Starter Type

Ecombo*Plus* Starter with CA7

CK7	*2 component DOL Starter*
CKU7	*2 component REV Starter*

Ecombo Starter with CA7

CL7	*2 component DOL Starter*
CLU7	*2 component REV Starter*
CLT7	*3 component DOL Starter*
CLUT7	*3 component REV Starter*

Ecombo Starter with CA8

CL8	*2 component DOL Starter*
CLU8	*2 component REV Starter*

Contactor Series

Series CA7 ❶

9(E)
12(E)
16(E)
23(E)
30(E)
37(E)
43(E)

Series CA8

9(C)
12(C)

Auxiliary Contact

01	*1 NC*
10	*1 NO*
11	*1 NO + 1 NC*
02	*2 NC*
22	*2 NO + 2 NC*

Control Voltage*

Code	AC Voltage
24Z	*24V 50/60Hz*
120	*110V 50Hz / 120V 60Hz*
208	*208V 60Hz*
220W	*208…240V 60Hz*
277	*240V 50Hz / 277V 60Hz*
380	*380…400V 50Hz / 440V 60Hz*
480	*440V 50Hz / 480V 60Hz*
600	*550V 50Hz / 600V 60Hz*

Code	DC Voltage
12D(E)	*12V*
24D(E)	*24V*
48D(E)	*48V*
110D(E)	*110V*
220D(E)	*220V*

** Other control voltages available*
(E) designates Electronic DC Coils

This illustration is for reference only.

CL7 - 9 - 10 - 24Z - AS 0.25A - A10

Turn to the appropriate page to determine specific catalog number

Circuit Breaker Type

KT..7

A…	*Motor Protection*
B…	*Starter Protection*
C…	*High Inrush Protection*
…S	*Standard Performance*
…H	*High Performance*

Adj. Range

0.16A	*0.1…0.16A*
0.25A	*0.16…0.25A*
0.4A	*0.25…0.4A*
0.63A	*0.4…0.63A*
1A	*0.63…1.0A*
1.6A	*1.0…1.6A*
2.5A	*1.6…2.5A*
4A	*2.5…4.0A*
6.3A	*4.0…6.3A*
10A	*6.3…10A*
16A	*10…16A*
20A	*16…20A*
25A	*20…25A*
32A	*25…32A*
45A	*32…45A*

Auxiliaries + Trip Contacts

X	*No auxiliary contacts*
Front Mounted Auxiliaries	
A10	*Aux. Contact 1 NO*
A01	*Aux. Contact 1 NC*
A11	*Aux. Contact 1 NO + 1 NC*
A20	*Aux. Contact 2 NO*
T10A01	*1 NO Short Circuit or Overload + 1 NC Aux. Contact*
T10A10	*1 NO Short Circuit or Overload + 1 NO Aux. Contact*
Side Mounted Auxiliaries	
AS11	*Aux. Contact 1 NO + 1 NC*
AS20	*Aux. Contact 2 NO*
R10	*1 NC Short Circuit or Overload + 1 NO Aux. Contact*
R11	*1 NC Short Circuit or Overload + 1 NC Aux. Contact*

Option(s)

For complete listing of **Option Codes,** refer to Modifications page in this section.

❶ (D & E) designations indicate DC coil.

Non-Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1M	~	~	~	~	**CL8-09-10-✱-AS0.16A-X**	**400.09**
0.16...0.25	3.3	2M	~	~	~	~	**CL8-09-10-✱-AS0.25A-X**	**400.09**
0.25...0.40	5.2	3M	~	~	~	~	**CL8-09-10-✱-AS0.4A-X**	**400.09**
0.40...0.63	8.2	4M	~	~	~	~	**CL8-09-10-✱-AS0.63A-X**	**432.22**
0.63...1	13	5M	~	~	~	1/2	**CL8-09-10-✱-AS1A-X**	**432.22**
1...1.6	21	6M	~	~	1/2	3/4	**CL8-09-10-✱-AS1.6A-X**	**432.22**
1.6...2.5	33	7M	1/2	1/2	1	1-1/2	**CL8-09-10-✱-AS2.5A-X**	**432.22**
2.5...4	52	8M	3/4	3/4	2	3	**CL8-09-10-✱-AS4A-X**	**432.22**
4...6.3	82	9M	1	1-1/2	3	~	**CL8-09-10-✱-AS6.3A-X**	**446.73**
6.3...10	130	10M	2	2	5	~	**CL8-09-10-✱-AS10A-X**	**446.73**
6.3…10	130	11M	~	3	~	~	**CL8-12-10-✱-AS10A-X**	**505.82**
10…16	208	12M	3	~	7-1/2	~	**CL8-12-10-✱-AS16A-X**	**505.82**

Non-Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1M	~	~	~	~	**CL8-09C-10-✱-AS0.16A-X**	**436.37**
0.16...0.25	3.3	2M	~	~	~	~	**CL8-09C-10-✱-AS0.25A-X**	**436.37**
0.25...0.40	5.2	3M	~	~	~	~	**CL8-09C-10-✱-AS0.4A-X**	**436.37**
0.40...0.63	8.2	4M	~	~	~	~	**CL8-09C-10-✱-AS0.63A-X**	**471.61**
0.63...1	13	5M	~	~	~	1/2	**CL8-09C-10-✱-AS1A-X**	**471.61**
1...1.6	21	6M	~	~	1/2	3/4	**CL8-09C-10-✱-AS1.6A-X**	**471.61**
1.6...2.5	33	7M	1/2	1/2	1	1-1/2	**CL8-09C-10-✱-AS2.5A-X**	**471.61**
2.5...4	52	8M	3/4	3/4	2	3	**CL8-09C-10-✱-AS4A-X**	**471.61**
4...6.3	82	9M	1	1-1/2	3	~	**CL8-09C-10-✱-AS6.3A-X**	**489.23**
6.3...10	130	10M	2	2	5	~	**CL8-09C-10-✱-AS10A-X**	**489.23**
6.3…10	130	11M	~	3	~	~	**CL8-12C-10-✱-AS10A-X**	**519.29**
10…16	208	12M	3	~	7-1/2	~	**CL8-12C-10-✱-AS16A-X**	**519.29**

Includes:

- KTA7-25S (Standard Interrupting Capacity) Motor Controller
- CA8 Contactor
- Connecting Module (Cat.# KT7-25S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT7-25-TE1)
- Can mount on one DIN-rail

AC Coil Codes ❸

AC Coil Code	Voltage Range 50 Hz	60 Hz
12	12V	12V
24Z	**24V**	**24V**
48Z	48V	48V
120	**110V**	**120V**
208	200V-220V	200V-220V
240	240V	240V
380 ❺	Use Coil Code 400	
400 ❺	400V	400V
480	**440V**	**480V**
575 ❻	Use Coil Code 600	
600 ❻	525V	600V

DC Coil Codes ❸

DC Coil Code	Voltage
12D	12V
24D	**24V ❹**
110D	110V
125D	125V
220D	220V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Does not include auxiliary contacts. See Factory Options on page F69 for additional auxiliary contact configurations.
❸ The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.
❹ Integrated surge suppressor for coil is available. See page F69 for options.
❺ The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.
❻ Use this code for 575V applications.

Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1M	~	~	~	~	CLU8-09-02-✱-AS0.16A-X	588.74
0.16...0.25	3.3	2M	~	~	~	~	CLU8-09-02-✱-AS0.25A-X	588.74
0.25...0.40	5.2	3M	~	~	~	~	CLU8-09-02-✱-AS0.4A-X	588.74
0.40...0.63	8.2	4M	~	~	~	~	CLU8-09-02-✱-AS0.63A-X	594.96
0.63...1	13	5M	~	~	~	1/2	CLU8-09-02-✱-AS1A-X	594.96
1...1.6	21	6M	~	~	1/2	3/4	CLU8-09-02-✱-AS1.6A-X	594.96
1.6...2.5	33	7M	1/2	1/2	1	1-1/2	CLU8-09-02-✱-AS2.5A-X	594.96
2.5...4	52	8M	3/4	3/4	2	3	CLU8-09-02-✱-AS4A-X	594.96
4...6.3	82	9M	1	1-1/2	3	~	CLU8-09-02-✱-AS6.3A-X	638.49
6.3...10	130	10M	2	2	5	~	CLU8-09-02-✱-AS10A-X	638.49
6.3...10	130	11M	~	3	~	~	CLU8-12-02-✱-AS10A-X	725.56
10…16	208	12M	3	~	7-1/2	~	CLU8-12-02-✱-AS16A-X	725.56

Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1M	~	~	~	~	CLU8-09C-02-✱-AS0.16A-X	628.12
0.16...0.25	3.3	2M	~	~	~	~	CLU8-09C-02-✱-AS0.25A-X	628.12
0.25...0.40	5.2	3M	~	~	~	~	CLU8-09C-02-✱-AS0.4A-X	628.12
0.40...0.63	8.2	4M	~	~	~	~	CLU8-09C-02-✱-AS0.63A-X	633.31
0.63...1	13	5M	~	~	~	1/2	CLU8-09C-02-✱-AS1A-X	633.31
1...1.6	21	6M	~	~	1/2	3/4	CLU8-09C-02-✱-AS1.6A-X	633.31
1.6...2.5	33	7M	1/2	1/2	1	1-1/2	CLU8-09C-02-✱-AS2.5A-X	633.31
2.5...4	52	8M	3/4	3/4	2	3	CLU8-09C-02-✱-AS4A-X	633.31
4...6.3	82	9M	1	1-1/2	3	~	CLU8-09C-02-✱-AS6.3A-X	677.88
6.3...10	130	10M	2	2	5	~	CLU8-09C-02-✱-AS10A-X	677.88
6.3...10	130	11M	~	3	~	~	CLU8-12C-02-✱-AS10A-X	737.99
10…16	208	12M	3	~	7-1/2	~	CLU8-12C-02-✱-AS16A-X	737.99

Includes:

- KTA7-25S (Standard Interrupting Capacity) Motor Controller
- One Reversing CAU8 Contactor with Mechanical Interlock (CM8)
- Connecting Module Cat.# KT7-25S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT7-25-TE1)
- Reversing Power Wiring Kit (Cat.# CAUT8-PW)
- Can mount on one DIN-rail

AC Coil Codes ❸

AC Coil Code	Voltage Range 50 Hz	60 Hz
12	12V	12V
24Z	24V	24V
48Z	48V	48V
120	110V	120V
208	200V-220V	200V-220V
240	240V	240V
380 ❺	Use Coil Code 400	
400 ❺	400V	400V
480	440V	480V
575 ❻	Use Coil Code 600	
600 ❻	525V	600V

DC Coil Codes ❸

DC Coil Code	Voltage
12D	12V
24D	24V ❹
110D	110V
125D	125V
220D	220V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Does not include auxiliary contacts. See Factory Options on page F69 for additional auxiliary contact configurations.
❸ The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.
❹ Integrated surge suppressor for coil is available. See page F69 for options.
❺ The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.
❻ Use this code for 575V applications.

Non-Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ❸

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❻	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1	~	~	~	~	**CL7-9-10-✱-AS0.16A-A10**	**407.35**
0.16...0.25	3.3	2	~	~	~	~	**CL7-9-10-✱-AS0.25A-A10**	**407.35**
0.25...0.40	5.2	3	~	~	~	~	**CL7-9-10-✱-AS0.4A-A10**	**407.35**
0.40...0.63	8.2	4	~	~	~	~	**CL7-9-10-✱-AS0.63A-A10**	**439.48**
0.63...1	13	5	~	~	~	1/2	**CL7-9-10-✱-AS1A-A10**	**439.48**
1...1.6	21	6	~	~	1/2	3/4	**CL7-9-10-✱-AS1.6A-A10**	**439.48**
1.6...2.5	33	7	1/2	1/2	1	1-1/2	**CL7-9-10-✱-AS2.5A-A10**	**439.48**
2.5...4	52	8	3/4	3/4	2	3	**CL7-9-10-✱-AS4A-A10**	**439.48**
4...6.3	82	9	1	1-1/2	3	5 ❺	**CL7-9-10-✱-AS6.3A-A10** ❺	**439.48**
6.3...10	130	11	2	3	5	7-1/2 ❺	**CL7-12-10-✱-AS10A-A10** ❺	**467.47**
10...16	208	12	3	5	10	10 ❺	**CL7-16-10-✱-AS16A-A10** ❺	**524.47**
14.5...20	260	15	5	5	10	15 ❺	**CL7-23-10-✱-AS20A-A10** ❺	**544.17**
18.5...25	325	16	5 ❺	7-1/2 ❺	15 ❺	20 ❺	**CL7-23-10-✱-AS25A-A10** ❺	**544.17**
KTA7-25H — High Interrupting Capacity								
1.6...2.5	33	17	1/2	1/2	1	1-1/2	**CL7-9-10-✱-AH2.5A-A10**	**499.59**
2.5...4	52	19	3/4	3/4	2	3	**CL7-9-10-✱-AH4A-A10**	**499.59**
4...6.3	82	22	1	1-1/2	3	5	**CL7-9-10-✱-AH6.3A-A10**	**499.59**
6.3...10	130	24	2	3	5	7-1/2	**CL7-12-10-✱-AH10A-A10**	**534.84**
10...16	208	28	3	5	10	10	**CL7-16-10-✱-AH16A-A10**	**591.85**
14.5...20	260	31	5	5	10	15 ❺	**CL7-23-10-✱-AH20A-A10** ❺	**610.51**
18...25	325	33	5	7-1/2	15	20 ❺	**CL7-23-10-✱-AH25A-A10** ❺	**610.51**
KTA7-45H — High Interrupting Capacity ❸								
6.3…10	130	36	2	3	5	7-1/2	**CL7-30-10-✱-AH10A-A10-W**	**854.09**
10…16	208	37	3	5	10	10	**CL7-30-10-✱-AH16A-A10-W**	**854.09**
14.5…20	260	38	5	5	10	15	**CL7-30-10-✱-AH20A-A10-W**	**854.09**
18…25	325	39	7-1/2	7-1/2	15	20	**CL7-30-10-✱-AH25A-A10-W**	**854.09**
23...32	416	41	7-1/2	10	20	25	**CL7-30-10-✱-AH32A-A10-W**	**910.06**
32…45	585	45	10	10	25	30	**CL7-37-10-✱-AH45A-A10-W**	**969.14**
32…45	585	46	10	15	30	30	**CL7-43-11-✱-AH45A-A10-W** ❹	**991.94**

For applications above 45 amps please consider open type combination starters on page C59.

CL7-23-10-120-AS25A-A10

Includes:

- KT7 Motor Controller with 1 NO Auxiliary Contact
- CA7 Contactor (AC)
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ❸

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Coil Codes (✱) ❷

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
208	~	208V
220W	**200V-220V**	**208V-240V**
240	220V	240V
277	240V	277V
380 ❻	380...400V	440V
480 ❻	**440V**	**480V**
600 ❻	550V	600V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor name-plate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Other voltages available, see Section A in this catalog.
❸ CL7-30…43 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 25S or 25H models add **-W** to end of catalog number. See page F69 for modifications.
❹ CL7-43 supplied with (1) NO and (1) NC front mount auxiliary.
❺ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
❻ Suffix –A10 uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change suffix –A10 to –AS11 (example CL7-9-10-✱-AS0.16A-**AS11**) See options on page F69.

Non-Reversing Ecombo Starters with Electronic DC Coil, Series CA7 Contactor ❸

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1	~	~	~	~	**CL7-9E-10-✱-AS0.16A-A10**	**476.80**
0.16...0.25	3.3	2	~	~	~	~	**CL7-9E-10-✱-AS0.25A-A10**	**476.80**
0.25...0.40	5.2	3	~	~	~	~	**CL7-9E-10-✱-AS0.4A-A10**	**476.80**
0.40...0.63	8.2	4	~	~	~	~	**CL7-9E-10-✱-AS0.63A-A10**	**511.00**
0.63...1	13	5	~	~	~	1/2	**CL7-9E-10-✱-AS1A-A10**	**511.00**
1...1.6	21	6	~	~	1/2	3/4	**CL7-9E-10-✱-AS1.6A-A10**	**511.00**
1.6...2.5	33	7	1/2	1/2	1	1-1/2	**CL7-9E-10-✱-AS2.5A-A10**	**511.00**
2.5...4	52	8	3/4	3/4	2	3	**CL7-9E-10-✱-AS4A-A10**	**511.00**
4...6.3	82	9	1	1-1/2	3	5 ❻	**CL7-9E-10-✱-AS6.3A-A10** ❻	**511.00**
6.3...10	130	11	2	3	5	7-1/2 ❻	**CL7-12E-10-✱-AS10A-A10** ❻	**538.99**
10...16	208	12	3	5	10	10 ❻	**CL7-16E-10-✱-AS16A-A10** ❻	**606.36**
14.5...20	260	15	5	5	10	15 ❻	**CL7-23E-10-✱-AS20A-A10** ❻	**630.20**
18.5...25	325	16	5 ❻	7-1/2 ❻	15 ❻	20 ❻	**CL7-23E-10-✱-AS25A-A10** ❻	**630.20**
KTA7-25H — High Interrupting Capacity								
1.6...2.5	33	17	1/2	1/2	1	1-1/2	**CL7-9E-10-✱-AH2.5A-A10**	**572.15**
2.5...4	52	19	3/4	3/4	2	3	**CL7-9E-10-✱-AH4A-A10**	**572.15**
4...6.3	82	22	1	1-1/2	3	5	**CL7-9E-10-✱-AH6.3A-A10**	**572.15**
6.3...10	130	24	2	3	5	7-1/2	**CL7-12E-10-✱-AH10A-A10**	**601.18**
10...16	208	28	3	5	10	10	**CL7-16E-10-✱-AH16A-A10**	**672.70**
14.5...20	260	31	5	5	10	15 ❻	**CL7-23E-10-✱-AH20A-A10** ❻	**691.35**
18...25	325	33	5	7-1/2	15	20 ❻	**CL7-23E-10-✱-AH25A-A10** ❻	**691.35**
KTA7-45H — High Interrupting Capacity ❹								
6.3…10	130	36	2	3	5	7-1/2	**CL7-30E-10-✱-AH10A-A10-W**	**958.77**
10…16	208	37	3	5	10	10	**CL7-30E-10-✱-AH16A-A10-W**	**958.77**
14.5…20	260	38	5	5	10	15	**CL7-30E-10-✱-AH20A-A10-W**	**958.77**
18…25	325	39	7-1/2	7-1/2	15	20	**CL7-30E-10-✱-AH25A-A10-W**	**958.77**
23...32	416	41	7-1/2	10	20	25	**CL7-30E-10-✱-AH32A-A10-W**	**1,015.78**
32…45	585	45	10	10	25	30	**CL7-37E-10-✱-AH45A-A10-W**	**1,089.37**
32…45	585	46	10	15	30	30	**CL7-43E-11-✱-AH45A-A10-W** ❺	**1,151.56**

For applications above 45 amps please consider open type combination starters on page C59

CL7-23E-10-24E-AS25A-A10

Includes:

- KT7 Motor Controller with 1 NO Auxiliary Contact
- CA7-9E...43E Contactor
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ❸

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Coil Codes ❷

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Horsepower ratings shown in the tables are for reference only.
The final selection of the controller depends on the actual motor full load current and service factor.

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ CL7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
❸ See Section A for limitations on adding auxiliaries to Electronic DC Coil contacts.
❹ CL7-30E…43E with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 25S or 25H models add **-W** to end of catalog number. See page F69 for modifications.
❺ CL7-43E supplied with (1) NO and (1) NC front mount auxiliary.
❻ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.

Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ❸

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❻	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1	~	~	~	~	**CLU7-9-22-✱-AS0.16A-A10**	**617.76**
0.16...0.25	3.3	2	~	~	~	~	**CLU7-9-22-✱-AS0.25A-A10**	**617.76**
0.25...0.40	5.2	3	~	~	~	~	**CLU7-9-22-✱-AS0.4A-A10**	**617.76**
0.40...0.63	8.2	4	~	~	~	~	**CLU7-9-22-✱-AS0.63A-A10**	**648.85**
0.63...1	13	5	~	~	~	1/2	**CLU7-9-22-✱-AS1A-A10**	**648.85**
1...1.6	21	6	~	~	1/2	3/4	**CLU7-9-22-✱-AS1.6A-A10**	**648.85**
1.6...2.5	33	7	1/2	1/2	1	1-1/2	**CLU7-9-22-✱-AS2.5A-A10**	**648.85**
2.5...4	52	8	3/4	3/4	2	3	**CLU7-9-22-✱-AS4A-A10**	**648.85**
4...6.3	82	9	1	1-1/2	3	5 ❺	**CLU7-9-22-✱-AS6.3A-A10** ❺	**648.85**
6.3...10	130	11	2	3	5	7-1/2 ❺	**CLU7-12-22-✱-AS10A-A10** ❺	**725.56**
10...16	208	12	3	5	10	10 ❺	**CLU7-16-22-✱-AS16A-A10** ❺	**783.60**
14.5...20	260	15	5	5	10	15 ❺	**CLU7-23-22-✱-AS20A-A10** ❺	**824.03**
18.5...25	325	16	5 ❺	7-1/2 ❺	15 ❺	20 ❺	**CLU7-23-22-✱-AS25A-A10** ❺	**824.03**
KTA7-25H — High Interrupting Capacity								
1.6...2.5	33	17	1/2	1/2	1	1-1/2	**CLU7-9-22-✱-AH2.5A-A10**	**707.94**
2.5...4	52	19	3/4	3/4	2	3	**CLU7-9-22-✱-AH4A-A10**	**707.94**
4...6.3	82	22	1	1-1/2	3	5	**CLU7-9-22-✱-AH6.3A-A10**	**707.94**
6.3...10	130	24	2	3	5	7-1/2	**CLU7-12-22-✱-AH10A-A10**	**811.59**
10...16	208	28	3	5	10	10	**CLU7-16-22-✱-AH16A-A10**	**852.01**
14.5...20	260	31	5	5	10	15 ❺	**CLU7-23-22-✱-AH20A-A10** ❺	**892.44**
18...25	325	33	5	7-1/2	15	20 ❺	**CLU7-23-22-✱-AH25A-A10** ❺	**892.44**
KTA7-45H — High Interrupting Capacity ❸								
6.3…10	130	36	2	3	5	7-1/2	**CLU7-30-22-✱-AH10A-A10-W**	**1,026.15**
10…16	208	37	3	5	10	10	**CLU7-30-22-✱-AH16A-A10-W**	**1,026.15**
14.5…20	260	38	5	5	10	15	**CLU7-30-22-✱-AH20A-A10-W**	**1,026.15**
18…25	325	39	7-1/2	7-1/2	15	20	**CLU7-30-22-✱-AH25A-A10-W**	**1,026.15**
23...32	416	41	7-1/2	10	20	25	**CLU7-30-22-✱-AH32A-A10-W**	**1,121.50**
32…45	585	45	10	10	25	30	**CLU7-37-22-✱-AH45A-A10-W**	**1,183.69**
32…45	585	46	10	15	30	30	**CLU7-43-22-✱-AH45A-A10-W** ❹	**1,250.03**

CLU7-9-22-120-AS25A-A10

Includes:

- KT7 Motor Controller with 1 NO Auxiliary Contact
- Two CA7 Contactors (AC)
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ❸

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Coil Codes (✱) ❷

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
208	~	208V
220W	**200V-220V**	**208V-240V**
240	220V	240V
277	240V	277V
380 ❻	380...400V	440V
480 ❻	**440V**	**480V**
600 ❻	550V	600V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Other voltages available, see Section A in this catalog.
❸ CLU7-30…43 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17 To add Type W Mounting Modules for 25S or 25H models add **-W** to end of catalog number. See page F69 for modifications.
❹ CLU7-43 supplied with (1) NO and (1) NC front mount auxiliary per contactor.
❺ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
❻ Suffix –A10 uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change suffix –A10 to –AS11 (example CLU7-9-22-✱-AS0.16A-**AS11**) See options on page F69.

Reversing Ecombo Starters with Electronic DC Coil, Series CA7 Contactor ❸

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1	~	~	~	~	**CLU7-9E-22-✱-AS0.16A-A10**	**753.54**
0.16...0.25	3.3	2	~	~	~	~	**CLU7-9E-22-✱-AS0.25A-A10**	**753.54**
0.25...0.40	5.2	3	~	~	~	~	**CLU7-9E-22-✱-AS0.4A-A10**	**753.54**
0.40...0.63	8.2	4	~	~	~	~	**CLU7-9E-22-✱-AS0.63A-A10**	**782.57**
0.63...1	13	5	~	~	~	1/2	**CLU7-9E-22-✱-AS1A-A10**	**782.57**
1...1.6	21	6	~	~	1/2	3/4	**CLU7-9E-22-✱-AS1.6A-A10**	**782.57**
1.6...2.5	33	7	1/2	1/2	1	1-1/2	**CLU7-9E-22-✱-AS2.5A-A10**	**782.57**
2.5...4	52	8	3/4	3/4	2	3	**CLU7-9E-22-✱-AS4A-A10**	**782.57**
4...6.3	82	9	1	1-1/2	3	5 ❻	**CLU7-9E-22-✱-AS6.3A-A10 ❻**	**782.57**
6.3...10	130	11	2	3	5	7-1/2 ❻	**CLU7-12E-22-✱-AS10A-A10 ❻**	**883.10**
10...16	208	12	3	5	10	10 ❻	**CLU7-16E-22-✱-AS16A-A10 ❻**	**949.44**
14.5...20	260	15	5	5	10	15 ❻	**CLU7-23E-22-✱-AS20A-A10 ❻**	**991.94**
18.5...25	325	16	5 ❻	7-1/2 ❻	15 ❻	20 ❻	**CLU7-23E-22-✱-AS25A-A10 ❻**	**991.94**
KTA7-25H — High Interrupting Capacity								
1.6...2.5	33	17	1/2	1/2	1	1-1/2	**CLU7-9E-22-✱-AH2.5A-A10**	**844.76**
2.5...4	52	19	3/4	3/4	2	3	**CLU7-9E-22-✱-AH4A-A10**	**844.76**
4...6.3	82	22	1	1-1/2	3	5	**CLU7-9E-22-✱-AH6.3A-A10**	**844.76**
6.3...10	130	24	2	3	5	7-1/2	**CLU7-12E-22-✱-AH10A-A10**	**963.96**
10...16	208	28	3	5	10	10	**CLU7-16E-22-✱-AH16A-A10**	**1,011.63**
14.5...20	260	31	5	5	10	15 ❻	**CLU7-23E-22-✱-AH20A-A10 ❻**	**1,059.31**
18...25	325	33	5	7-1/2	15	20 ❻	**CLU7-23E-22-✱-AH25A-A10 ❻**	**1,059.31**
KTA7-45H — High Interrupting Capacity ❹								
6.3…10	130	36	2	3	5	7-1/2	**CLU7-30E-22-✱-AH10A-A10-W**	**1,238.63**
10…16	208	37	3	5	10	10	**CLU7-30E-22-✱-AH16A-A10-W**	**1,238.63**
14.5…20	260	38	5	5	10	15	**CLU7-30E-22-✱-AH20A-A10-W**	**1,238.63**
18…25	325	39	7-1/2	7-1/2	15	20	**CLU7-30E-22-✱-AH25A-A10-W**	**1,238.63**
23...32	416	41	7-1/2	10	20	25	**CLU7-30E-22-✱-AH32A-A10-W**	**1,333.99**
32…45	585	45	10	10	25	30	**CLU7-37E-22-✱-AH45A-A10-W**	**1,501.91**
32…45	585	46	10	15	30	30	**CLU7-43E-22-✱-AH45A-A10-W ❺**	**1,570.32**

CLU7-9E-22-24E-AS25A-A10

Includes:

- KT7 Motor Controller with 1 NO Auxiliary Contact
- Two CA7-9E...43E Contactors
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ❸

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Coil Codes ❷

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Horsepower ratings shown in the tables are for reference only. ***The final selection of the controller depends on the actual motor full load current and service factor.***

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ CLU7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
❸ See Section A for limitations on adding auxiliaries to Electronic DC Coil contacts.
❹ CLU7-30E…43E with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17 To add Type W Mounting Modules for 25S or 25H models add **-W** to end of catalog number. See page F69 for modifications.
❺ CLU7-43E supplied with (1) NO and (1) NC front mount auxiliary per contactor.
❻ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.

Non-Reversing EcomboPlus Starters with AC Coil, Series CA7 Contactors

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❻	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1	~	~	~	~	**CK7-9-10-✱-AS0.16A-A11**	**534.84**
0.16...0.25	3.3	2	~	~	~	~	**CK7-9-10-✱-AS0.25A-A11**	**534.84**
0.25...0.40	5.2	3	~	~	~	~	**CK7-9-10-✱-AS0.4A-A11**	**534.84**
0.40...0.63	8.2	4	~	~	~	~	**CK7-9-10-✱-AS0.63A-A11**	**562.83**
0.63...1	13	5	~	~	~	1/2	**CK7-9-10-✱-AS1A-A11**	**562.83**
1...1.6	21	6	~	~	1/2	3/4	**CK7-9-10-✱-AS1.6A-A11**	**562.83**
1.6...2.5	33	7	1/2	1/2	1	1-1/2	**CK7-9-10-✱-AS2.5A-A11**	**562.83**
2.5...4	52	8	3/4	3/4	2	3	**CK7-9-10-✱-AS4A-A11**	**562.83**
4...6.3	82	9	1	1-1/2	3	5 ❺	**CK7-9-10-✱-AS6.3A-A11 ❺**	**562.83**
6.3...10	130	11	2	3	5	7-1/2 ❺	**CK7-12-10-✱-AS10A-A11 ❺**	**591.85**
10...16	208	12	3	5	10	10 ❺	**CK7-16-10-✱-AS16A-A11 ❺**	**646.79**
14.5...20	260	15	5	5	10	15 ❺	**CK7-23-10-✱-AS20A-A11 ❺**	**667.52**
18.5...25	325	16	5 ❺	7-1/2 ❺	15 ❺	20 ❺	**CK7-23-10-✱-AS25A-A11 ❺**	**667.52**
KTA7-25H — High Interrupting Capacity								
1.6...2.5	33	17	1/2	1/2	1	1-1/2	**CK7-9-10-✱-AH2.5A-A11**	**623.98**
2.5...4	52	19	3/4	3/4	2	3	**CK7-9-10-✱-AH4A-A11**	**623.98**
4...6.3	82	22	1	1-1/2	3	5	**CK7-9-10-✱-AH6.3A-A11**	**623.98**
6.3...10	130	24	2	3	5	7-1/2	**CK7-12-10-✱-AH10A-A11**	**653.00**
10...16	208	28	3	5	10	10	**CK7-16-10-✱-AH16A-A11**	**715.19**
14.5...20	260	31	5	5	10	15 ❺	**CK7-23-10-✱-AH20A-A11 ❺**	**734.89**
18...25	325	33	5	7-1/2	15	20 ❺	**CK7-23-10-✱-AH25A-A11 ❺**	**734.89**
KTA7-45H — High Interrupting Capacity								
6.3…10	130	36	2	3	5	7-1/2	**CK7-30-11-✱-AH10A-A11**	**930.79**
10....16	208	37	3	5	10	10	**CK7-30-11-✱-AH16A-A11**	**930.79**
14.5...20	260	38	5	5	10	15	**CK7-30-11-✱-AH20A-A11**	**930.79**
18…25	325	39	7-1/2	7-1/2	15	20	**CK7-30-11-✱-AH25A-A11**	**930.79**
23…32	416	41	7-1/2	10	20	25	**CK7-30-11-✱-AH32A-A11**	**986.76**
32…45	585	45	10	10	25	30	**CK7-37-11-✱-AH45A-A11**	**1,045.84**
32…45	585	46	10	15	30	30	**CK7-43-11-✱-AH45A-A11**	**1,056.21**

For applications above 45 amps please consider open type combination starters on page C59.

Description ❸

The EcomboPlus starter is a factory assembly consisting of a KT7 controller with 1 NO - 1 NC auxiliary and a CA7 contactor housed in a specially designed frame. All control wiring is pre-wired and brought out to a built-in terminal block, integral to the mounting frame. Terminal Adaptor (Cat.# KT7-25-TE1 or KT7-45-TE) is also included for Type E applications.

Coil Codes (✱) ❹❻

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
208	~	208V
220W	**200V-220V**	**208V-240V**
240	220V	240V
277	240V	277V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ See Factory Options on page F69 for additional auxiliary contact configurations.
- KT7 supplied with (1) NO and (1) NC auxiliary contact
- CK7-9…23 supplied with (1) NO auxiliary contact
- CK7-30…37 supplied with (1) NO and (1) NC side mount auxiliary contact
- CK7-43 supplied with (1) NO and (1) NC front mount auxiliary contact

❸ Mounting Options:
- Screw Fixing
- Snap Fixing on (1) or (2) 35 mm DIN Rails
- Snap Fixing on (1) 75 mm DIN Rail

❹ Other voltages available, see Section A in this catalog.
❺ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
❻ Suffix –A11 uses front-mount KT7-PE1-11 300 VAC maximum control circuit. This assembly is not applicable with control circuits greater than 300 VAC.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

Non-Reversing EcomboPlus Starters with Electronic DC Coil, Series CA7 Contactors ❹❺

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1	~	~	~	~	**CK7-9E-10-✱-AS0.16A-A11**	**631.24**
0.16...0.25	3.3	2	~	~	~	~	**CK7-9E-10-✱-AS0.25A-A11**	**631.24**
0.25...0.40	5.2	3	~	~	~	~	**CK7-9E-10-✱-AS0.4A-A11**	**631.24**
0.40...0.63	8.2	4	~	~	~	~	**CK7-9E-10-✱-AS0.63A-A11**	**660.25**
0.63...1	13	5	~	~	~	1/2	**CK7-9E-10-✱-AS1A-A11**	**660.25**
1...1.6	21	6	~	~	1/2	3/4	**CK7-9E-10-✱-AS1.6A-A11**	**660.25**
1.6...2.5	33	7	1/2	1/2	1	1-1/2	**CK7-9E-10-✱-AS2.5A-A11**	**660.25**
2.5...4	52	8	3/4	3/4	2	3	**CK7-9E-10-✱-AS4A-A11**	**660.25**
4...6.3	82	9	1	1-1/2	3	5 ❻	**CK7-9E-10-✱-AS6.3A-A11** ❻	**660.25**
6.3...10	130	11	2	3	5	7-1/2 ❻	**CK7-12E-10-✱-AS10A-A11** ❻	**698.61**
10...16	208	12	3	5	10	10 ❻	**CK7-16E-10-✱-AS16A-A11** ❻	**764.95**
14.5...20	260	15	5	5	10	15 ❻	**CK7-23E-10-✱-AS20A-A11** ❻	**764.95**
18.5...25	325	16	5 ❻	7-1/2 ❻	15 ❻	20 ❻	**CK7-23E-10-✱-AS25A-A11** ❻	**764.95**
KTA7-25H — High Interrupting Capacity								
1.6...2.5	33	17	1/2	1/2	1	1-1/2	**CK7-9E-10-✱-AH2.5A-A11**	**717.26**
2.5...4	52	19	3/4	3/4	2	3	**CK7-9E-10-✱-AH4A-A11**	**717.26**
4...6.3	82	22	1	1-1/2	3	5	**CK7-9E-10-✱-AH6.3A-A11**	**717.26**
6.3...10	130	24	2	3	5	7-1/2	**CK7-12E-10-✱-AH10A-A11**	**755.62**
10...16	208	28	3	5	10	10	**CK7-16E-10-✱-AH16A-A11**	**812.63**
14.5...20	260	31	5	5	10	15 ❻	**CK7-23E-10-✱-AH20A-A11** ❻	**850.97**
18...25	325	33	5	7-1/2	15	20 ❻	**CK7-23E-10-✱-AH25A-A11** ❻	**850.97**
KTA7-45H — High Interrupting Capacity								
6.3…10	130	30	2	3	5	7-1/2	**CK7-30E-11-✱-AH10A-A11**	**1052.06**
10....16	208	37	3	5	10	10	**CK7-30E-11-✱-AH16A-A11**	**1052.06**
14.5...20	260	38	5	5	10	15	**CK7-30E-11-✱-AH20A-A11**	**1052.06**
18…25	325	39	7-1/2	7-1/2	15	20	**CK7-30E-11-✱-AH25A-A11**	**1052.06**
23…32	416	41	7-1/2	10	20	25	**CK7-30E-11-✱-AH32A-A11**	**1142.23**
32…45	585	45	10	10	25	30	**CK7-37E-11-✱-AH45A-A11**	**1171.26**
32…45	585	46	10	15	30	30	**CK7-43E-11-✱-AH45A-A11**	**1223.08**

For applications above 45 amps please consider open type combination starters on page C59.

Description ❸

- The EcomboPlus starter is a factory assembly consisting of a KT7 controller with 1 NO - 1 NC auxiliary and a CA7-9E…43E contactor housed in a specially designed frame. All control wiring is pre-wired and brought out to a built-in terminal block, integral to the mounting frame. Terminal Adaptor (Cat.# KT7-25-TE1 or KT7-45-TE) is also included for Type E applications.

Coil Codes ❹

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ See Factory Options on page F69 for additional auxiliary contact configurations.
- KT7 supplied with (1) NO and (1) NC auxiliary contact
- CK7-9…23E supplied with (1) NO auxiliary contact
- CK7-30…37E supplied with (1) NO and (1) NC side mount auxiliary contact
- CK7-43E supplied with (1) NO and (1) NC front mount auxiliary contact

❸ Mounting Options:
- Screw Fixing
- Snap Fixing on (1) or (2) 35 mm DIN Rails
- Snap Fixing on (1) 75 mm DIN Rail

❹ CK7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
❺ See pages A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.
❻ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.

Reversing Ecombo*Plus* Starters with AC Coil, Series CA7 Contactors

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❻	Price
KTA7-25S — Standard Interrupting Capacity								
0.10...0.16	2.1	1	~	~	~	~	**CKU7-9-22-✱-AS0.16A-A11**	**811.59**
0.16...0.25	3.3	2	~	~	~	~	**CKU7-9-22-✱-AS0.25A-A11**	**811.59**
0.25...0.40	5.2	3	~	~	~	~	**CKU7-9-22-✱-AS0.4A-A11**	**811.59**
0.40...0.63	8.2	4	~	~	~	~	**CKU7-9-22-✱-AS0.63A-A11**	**835.43**
0.63...1	13	5	~	~	~	1/2	**CKU7-9-22-✱-AS1A-A11**	**835.43**
1...1.6	21	6	~	~	1/2	3/4	**CKU7-9-22-✱-AS1.6A-A11**	**835.43**
1.6...2.5	33	7	1/2	1/2	1	1-1/2	**CKU7-9-22-✱-AS2.5A-A11**	**835.43**
2.5...4	52	8	3/4	3/4	2	3	**CKU7-9-22-✱-AS4A-A11**	**835.43**
4...6.3	82	9	1	1-1/2	3	5 ❺	**CKU7-9-22-✱-AS6.3A-A11** ❺	**835.43**
6.3...10	130	11	2	3	5	7-1/2 ❺	**CKU7-12-22-✱-AS10A-A11** ❺	**906.95**
10...16	208	12	3	5	10	10 ❺	**CKU7-16-22-✱-AS16A-A11** ❺	**1,002.30**
14.5...20	260	15	5	5	10	15 ❺	**CKU7-23-22-✱-AS20A-A11** ❺	**1,011.63**
18.5...25	325	16	5 ❺	7-1/2 ❺	15 ❺	20 ❺	**CKU7-23-22-✱-AS25A-A11** ❺	**1,011.63**
KTA7-25H — High Interrupting Capacity								
1.6...2.5	33	17	1/2	1/2	1	1-1/2	**CKU7-9-22-✱-AH2.5A-A11**	**906.95**
2.5...4	52	19	3/4	3/4	2	3	**CKU7-9-22-✱-AH4A-A11**	**906.95**
4...6.3	82	22	1	1-1/2	3	5	**CKU7-9-22-✱-AH6.3A-A11**	**906.95**
6.3...10	130	24	2	3	5	7-1/2	**CKU7-12-22-✱-AH10A-A11**	**978.47**
10...16	208	28	3	5	10	10	**CKU7-16-22-✱-AH16A-A11**	**1,049.99**
14.5...20	260	31	5	5	10	15 ❺	**CKU7-23-22-✱-AH20A-A11** ❺	**1,097.67**
18...25	325	33	5	7-1/2	15	20 ❺	**CKU7-23-22-✱-AH25A-A11** ❺	**1,097.67**

Horsepower ratings shown in the tables are for reference only. ***The final selection of the controller depends on the actual motor full load current and service factor.***

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Coil Codes (✱) ❹❻

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
208	~	208V
220W	**200V-220V**	**208V-240V**
240	220V	240V
277	240V	277V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

Description ❸

The Ecombo*Plus* Reversing starter is a factory assembly consisting of a KT7 controller with 1 NO - 1 NC auxiliary and reversing CA7 contactors housed in a specially designed frame. All control wiring is pre-wired and brought out to a built-in terminal block, integral to the mounting frame. A Reversing Power Wiring Kit (Cat.# CAUT7-PW23) is used to wire the reversing contactors. An electrical and mechanical interlock is also provided (Cat.# CM7-02), as well as a Terminal Adaptor (Cat.# KT7-25-TE1) for Type E applications.

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ See Factory Options on page F69 for additional auxiliary contact configurations.
- KT7 supplied with (1) NO and (1) NC auxiliary contact
- CKU7 supplied with (2) NO auxiliary contact
- CM7-02 interlock supplied with (2) NC auxiliary contacts

❸ Mounting Options:
- Screw Fixing
- Snap Fixing on (1) or (2) 35 mm DIN Rails
- Snap Fixing on (1) 75 mm DIN Rail

❹ Other voltages available, see Section A in this catalog.
❺ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
❻ Suffix –A11 uses front-mount KT7-PE1-11 300 VAC maximum control circuit. This assembly is not applicable with control circuits greater than 300 VAC.

CL8 and CL7 Modifications ❹❺

Modification	Change Last Digit in Catalog Number to: ❶	Price Adder
KT7 Auxiliary (Front Mount 300VAC max.) and Trip Contacts		
Auxiliary Contact 1 NO (CL8 only)	**A10**	**57.01**
Auxiliary Contact 1 NC	**A01**	**57.01**
Auxiliary Contact 1 NO + 1 NC	**A11**	**64.26**
Auxiliary Contact 2 NO	**A20**	**64.26**
1 NO SC or OL + 1 NC Auxiliary Contact	**T10A01**	**81.89**
1 NO SC or OL + 1 NO Auxiliary Contact	**T10A10**	**81.89**
KT7 Auxiliary (Side Mount 600VAC max.) and Trip Contacts		
Auxiliary Contact 1 NO + 1 NC	**AS11**	**67.37**
Auxiliary Contact 2 NO	**AS20**	**67.37**
1 NC SC or OL + 1 NO Auxiliary Contact	**R10**	**88.10**
1 NO SC or OL + 1 NC Auxiliary Contact	**R11**	**88.10**

CL8 and CL7 Additions ❹❺

Add desired suffix AFTER auxiliary contact option code.

Addition	Add Suffix to Catalog Number:	Price Adder
Accessories		
Electronic Interfaces (CA7)	**-JE** ❸	**97.43**
Surge Suppressor RC (CA7, CA8)	**-R**	**55.97**
Surge Suppressor Varistor (CA7, CA8)	**-V**	**41.46**
Surge Suppressor Diode (CA7, CA8)	**-D**	**53.89**
Lockable Twist Knob (KT7) - Black	**-KN**	**27.98**
Lockable Twist Knob (KT7) - Red/Yellow	**-KRY**	**35.24**
Type W Mounting Module for CL7-9…23 includes 45mm short module (W-32489) ❷	**-W**	**51.83**
Type W Mounting Module for CLU7-9…23 includes 45mm (W-32849) and 54mm (W-32490) short module ❷	**-W**	**103.65**
Additional CA7 Contactor Auxiliaries (Side Mount)		
1 NC	**-S01**	**46.64**
1 NO	**-S10**	**46.64**
1 NO + 1 NC	**-S11**	**59.08**
2 NO	**-S20**	**59.08**
Additional CA7 & CA8 Contactor Auxiliaries (Front Mount)		
1 NO + 1 NC	**-F11**	**59.08**
2 NO	**-F20**	**59.08**
2 NO + 2 NC	**-F22**	**59.08**
Additional KT7 Auxiliaries (Side Mount) ❺		
2 NC	**-AS02**	**81.89**
2 NO	**-AS20**	**81.89**
1 NO + 1 NC	**-AS11**	**81.89**
Additional KT7 Trip Contacts (Side Mount) ❺		
1 NO SC or OL + 1 NO SC	**-R00**	**97.43**
1 NO SC or OL + 1 NC SC	**-R01**	**97.43**
1 NC SC or OL + 1 NO SC	**-R10**	**97.43**
1 NC SC or OL + 1 NC SC	**-R11**	**97.43**
1 NO SC + 1 NC SC	**-M11**	**97.43**

CK7 Modifications ❺

Modification	Change Last Digits (A11) in Catalog Number to: ❶	Price Adder
CK7 Auxiliary (Front Mount 300VAC max.) and Trip Contacts		
Auxiliary Contact 2 NO	**A20**	**53.89**
1 NO SC or OL + 1 NC Auxiliary Contact	**T10A01**	**17.62**
1 NO SC or OL + 1 NO Auxiliary Contact	**T10A10**	**17.62**

CK7 Additions ❹❺

Add desired suffix AFTER auxiliary contact option code.

Addition	Add Suffix to Catalog Number:	Price Adder
Accessories		
Electronic Interfaces (CA7)	**-JE**	**97.43**
Surge Suppressor RC (CA7)	**-R**	**55.97**
Surge Suppressor Varistor (CA7)	**-V**	**41.46**
Surge Suppressor Diode (CA7)	**-D**	**53.89**
Socket and Plug for Control Circuit	**-SP**	**46.64**
Lockable Twist Knob (KT7) - Black	**-KN**	**27.98**
Lockable Twist Knob (KT7) - Red/Yellow	**-KRY**	**35.24**
Additional Contactor Auxiliaries (Side Mount)		
1 NC	**-S01**	**46.64**
1 NO	**-S10**	**46.64**
1 NO + 1 NC	**-S11**	**59.08**
2 NO	**-S20**	**59.08**
Additional KT7 Auxiliaries (Side Mount) ❺		
2 NC	**-AS02**	**81.89**
2 NO	**-AS20**	**81.89**
1 NO + 1 NC	**-AS11**	**81.89**
Additional KT7 Trip Contacts (Side Mount) ❺		
1 NO SC or OL + 1 NO SC	**-R00**	**97.43**
1 NO SC or OL + 1 NC SC	**-R01**	**97.43**
1 NC SC or OL + 1 NO SC	**-R10**	**97.43**
1 NC SC or OL + 1 NC SC	**-R11**	**97.43**
1 NO SC + 1 NC SC	**-M11**	**97.43**

❶ For CL8, change last digit "X" to one of the modifications listed.
Example: CL8-09-10-✱-AS0.16A-**X** changes to CL8-09-10-✱-AS0.16A-**A10**.
For CL7, change last digits "A10" to one of the modifications listed.
Example: CL7-9-10-⁎-AS0.16A-**A10** changes to CL7-9-10-✱-AS0.16A-**A01**.

❷ CL7/CLU7-30…43 include all Type W Mounting Modules necessary from page F17.

❸ CRI7E-24 will be used. CRI7E-12 by special order only.

❹ See pages A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.

❺ Front Mount Auxiliary contacts have a maximum rating of 300VAC. Side Mounted Auxiliaries have a maximum rating of 600VAC where there would be no connection to the terminal block provided.

Non-Reversing 3-Component Ecombo Starters with AC Coil ❸❺

Rated Oper. Current [A] ❻	Overload Adj. Range [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] ❻ 200V	230V	460V	575V	Catalog Number ❷❹❼	Price
KTB7-25S — Standard Interrupting Capacity									
0.40	0.1…0.5	5.2	3B	~	~	~	~	**CLT7-9-✱-B2S0.4-A10-D1AB**	**614.66**
0.40	0.1…0.5	5.2	3B	~	~	~	~	**CLT7-9-✱-B2S0.4-A10-EAB**	**623.98**
1.0	0.2…1.0	13	5B	~	~	~	1/2	**CLT7-9-✱-B2S1-A10-D1BB**	**643.67**
1.0	0.2…1.0	13	5B	~	~	~	1/2	**CLT7-9-✱-B2S1-A10-EBB**	**654.04**
2.5	1.0…5.0	33	7B	1/2	1/2	1	~	**CLT7-9-✱-B2S2.5-A10-D1CB**	**643.67**
2.5	1.0…5.0	33	7B	1/2	1/2	1	~	**CLT7-9-✱-B2S2.5-A10-ECB**	**654.04**
KTB7-25H — High Interrupting Capacity									
2.5	1.0…5.0	33	17B	1/2	1/2	1	~	**CLT7-9-✱-B2H2.5-A10-D1CB**	**703.79**
2.5	1.0…5.0	33	17B	1/2	1/2	1	~	**CLT7-9-✱-B2H2.5-A10-ECB**	**715.19**
2.5	1.0…5.0	33	18B	1/2	1/2	1	1-1/2	**CLT7-23-✱-B2H2.5-A10-D1CB**	**775.32**
2.5	1.0…5.0	33	18B	1/2	1/2	1	1-1/2	**CLT7-23-✱-B2H2.5-A10-ECB**	**785.68**
4.0	1.0…5.0	52	21B	3/4	3/4	2	3	**CLT7-23-✱-B2H4-A10-D1CB**	**775.32**
4.0	1.0…5.0	52	21B	3/4	3/4	2	3	**CLT7-23-✱-B2H4-A10-ECB**	**785.68**
10	5.1…27	130	27B	2	3	5	7-1/2	**CLT7-30-✱-B2H10-A10-EED**	**893.47**
16	5.1…27	208	30B	3	5	10	10	**CLT7-30-✱-B2H16-A10-EED**	**937.01**
25	5.1…27	325	34B	5	7-1/2	15	~	**CLT7-30-✱-B2H25-A10-EED**	**937.01**
KTB7-45H — High Interrupting Capacity									
25	5.1…27	325	39B	5	7-1/2	15	20	**CLT7-30-✱-B4H25-A10-EED**	**1,082.12**
32	9…45	416	41B	7-1/2	10	20	20	**CLT7-30-✱-B4H32-A10-EFD**	**1,140.16**
32	9…45	416	42B	7-1/2	10	20	20	**CLT7-37-✱-B4H32-A10-EFD**	**1,184.74**
45	9…45	585	45B	10	10	25	~	**CLT7-37-✱-B4H45-A10-EFD**	**1,184.74**
45	9…45	585	46B	10	15	30	~	**CLT7-43-✱-B4H45-A10-EFD**	**1,196.14**

Includes:

- KTB7 Motor Controller
- CA7 Contactor (AC)
- CEP7 Solid State Overload Relay
- KT7 PSC and PNC Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 25A or 45A Frame Units as required from page F17
- See page F72 for Factory Options

Coil Codes (✱) ❷

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
208	~	208V
220W	200V-220V	208V-240V
240	220V	240V
277	240V	277V
380 ❼	380...400V	440V
480 ❼	**440V**	**480V**
600 ❼	550V	600V

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Other voltages available, see Section A in this catalog.
❸ All CLT7 contactors are supplied with Auxiliary Contacts as follows;
CLT7-9…23 (1) NO Internal Mount
CLT7-30…37 (1) NO Side Mount
CLT7-43 (1) NO & (1) NC Front Mount
All KTB7s are supplied with (1) NO auxiliary contact (A10), which should be used in series with the NC contact on the overload (95-96).
❹ See page F72 for CEP7 Overload Relay information.
❺ Horsepower ratings shown in tables are for reference only. ***The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.***
❻ The KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-EE_ overload relay with selectable trip class should be used to protect the motor against overload.
In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_e) of the motor FLA must be multiplied by the following factors for selection of the KTB7 Motor Circuit Controller KTB7-25S, KTB7-25H/32H and KTB7-45H.
Trip classes according to UL 508 Section 52 and IEC 60947-4-1
CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.73
The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB7.
❼ Catalog number includes –A10 which uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change –A10 to –AS11 (example CLT7-9-✱-B2S0.4-**AS11**-D1AB) Add $66.43 or see options on page F72.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

Reversing 3-Component Ecombo Starters with AC Coil ❸❹❺

Rated Oper. Current [A] ❻	Overload Adj. Range [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❹❼	Price
KTB7-25S — Standard Interrupting Capacity									
0.40	0.1…0.5	5.2	3B	~	~	~	~	**CLUT7-9-✱-B2S0.4-A10-D1AB**	**885.18**
0.40	0.1…0.5	5.2	3B	~	~	~	~	**CLUT7-9-✱-B2S0.4-A10-EAB**	**895.55**
1.0	0.2…1.0	13	5B	~	~	~	1/2	**CLUT7-9-✱-B2S1-A10-D1BB**	**915.24**
1.0	0.2…1.0	13	5B	~	~	~	1/2	**CLUT7-9-✱-B2S1-A10-EBB**	**925.61**
2.5	1.0…5.0	33	7B	1/2	1/2	1	~	**CLUT7-9-✱-B2S2.5-A10-D1CB**	**915.24**
2.5	1.0…5.0	33	7B	1/2	1/2	1	~	**CLUT7-9-✱-B2S2.5-A10-ECB**	**925.61**
KTB7-25H — High Interrupting Capacity									
2.5	1.0…5.0	33	17B	1/2	1/2	1	~	**CLUT7-9-✱-B2H2.5-A10-D1CB**	**975.36**
2.5	1.0…5.0	33	17B	1/2	1/2	1	~	**CLUT7-9-✱-B2H2.5-A10-ECB**	**985.72**
2.5	1.0…5.0	33	18B	1/2	1/2	1	1-1/2	**CLUT7-23-✱-B2H2.5-A10-D1CB**	**1,119.43**
2.5	1.0…5.0	33	18B	1/2	1/2	1	1-1/2	**CLUT7-23-✱-B2H2.5-A10-ECB**	**1,130.83**
4.0	1.0…5.0	52	21B	3/4	3/4	2	3	**CLUT7-23-✱-B2H4-A10-D1CB**	**1,119.43**
4.0	1.0…5.0	52	21B	3/4	3/4	2	3	**CLUT7-23-✱-B2H4-A10-ECB**	**1,130.83**
10	5.1…27	130	27B	2	3	5	7-1/2	**CLUT7-30-✱-B2H10-A10-EED**	**1,284.24**
16	5.1…27	208	30B	3	5	10	10	**CLUT7-30-✱-B2H16-A10-EED**	**1,327.77**
25	5.1…27	325	34B	5	7-1/2	15	~	**CLUT7-30-✱-B2H25-A10-EED**	**1,327.77**
KTB7-45H — High Interrupting Capacity									
25	5.1…27	325	39B	5	7-1/2	15	20	**CLUT7-30-✱-B4H25-A10-EED**	**1,471.85**
32	9…45	416	41B	7-1/2	10	20	20	**CLUT7-30-✱-B4H32-A10-EFD**	**1,536.11**
32	9…45	416	42B	7-1/2	10	20	20	**CLUT7-37-✱-B4H32-A10-EFD**	**1,613.85**
45	9…45	585	45B	10	10	25	~	**CLUT7-37-✱-B4H45-A10-EFD**	**1,613.85**
45	9…45	585	46B	10	15	30	~	**CLUT7-43-✱-B4H45-A10-EFD**	**1,689.52**

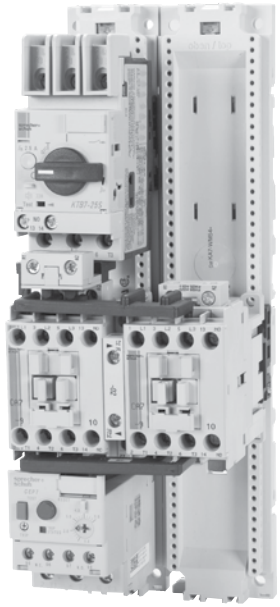

Includes:

- KTB7 Motor Controller
- CAU7 Reversing Contactor (AC)
- CEP7 Solid State Overload Relay
- KT7 PSC and PNC Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 25A or 45A Frame Units as required from page F17
- See page F72 for Factory Options

Coil Codes (✱) ❷

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
208	~	208V
220W	200V-220V	208V-240V
240	220V	240V
277	240V	277V
380 ❼	380...400V	440V
480 ❼	**440V**	**480V**
600 ❼	550V	600V

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Other voltages available, see Section A in this catalog.
❸ All CLUT7 are supplied with Auxiliary Contacts for customer use as follows;
CLUT7-9…23 (1) NO Internal Mount
CLUT7-30…37 (1) NO Side Mount
CLUT7-43 (1) NO & (1) NC Front Mount
CM7-02 interlock (2) NC (Electrical Interlocks)
All KTB7s are supplied with (1) NO auxiliary contact (A10), which should be used in series with the NC contact on the overload (95-96).
❹ All CAU7 reversing contactors are supplied with CM7-02, including (2) NC contacts for electronic interlocking (not available for customer use).
❺ Horsepower ratings shown in tables are for reference only. ***The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.***
❻ The KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-EE_ overload relay with selectable trip class should be used to protect the motor against overload.
In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_e) of the motor FLA must be multiplied by the following factors for selection of the KTB7 Motor Circuit Controller KTB7-25S, KTB7-25H/32H and KTB7-45H.
Trip classes according to UL 508 Section 52 and IEC 60947-4-1
CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.73
The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB7.
❼ Catalog number includes –A10 which uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change –A10 to –AS11 (example CLUT7-9-✱-B2S0.4-**AS11**-D1AB) Add $66.43 or see options on page F72.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

CLT7/CLUT7 Modifications ⓾

Modification	Change "X" Digit in Catalog Number to: ❽	Price Adder
KT7 Auxiliary (Front Mount 300VAC max.) and Trip Contacts		
Auxiliary Contact 1 NO + 1 NC	**A11**	**64.26**
Auxiliary Contact 2 NO	**A20**	**64.26**
1 NO SC + 1 NC Auxiliary Contact	**T10A01**	**81.89**
1 NO SC + 1 NO Auxiliary Contact	**T10A10**	**81.89**
KT7 Auxiliary (Side Mount 300VAC max.) and Trip Contacts		
Auxiliary Contact 1 NO + 1 NC	**AS11**	**67.37**
Auxiliary Contact 2 NO	**AS20**	**67.37**
1 NC SC + 1 NO Auxiliary Contact	**R10**	**88.10**
1 NC SC + 1 NC Auxiliary Contact	**R11**	**88.10**

CLT7/CLUT7 Additions ⓾

Addition	Add Suffix to end of Catalog Number:	Price Adder
Accessories		
Electronic Interfaces	**-JE**	**97.43**
Surge Suppressor RC	**-R**	**55.97**
Surge Suppressor Varistor	**-V**	**41.46**
Surge Suppressor Diode	**-D**	**53.89**
Lockable Twist Knob (KT7) - Black	**-KN**	**27.98**
Lockable Twist Knob (KT7) - Red/Yellow	**-KRY**	**35.24**
Additional CA7 Contactor Auxiliaries (Side Mount) ❾		
1 NC	**-S01**	**46.64**
1 NO	**-S10**	**46.64**
1 NO + 1 NC	**-S11**	**59.08**
2 NO	**-S20**	**59.08**
Additional CA7 Contactor Auxiliaries (Front Mount)		
1 NO + 1 NC	**-F11**	**59.08**
2 NO	**-F20**	**59.08**
2 NO + 2 NC	**-F22**	**59.08**
Additional KT7 Auxiliaries (Side Mount) ❾⓾		
2 NC	**-AS02**	**81.89**
2 NO	**-AS20**	**81.89**
1 NO + 1 NC	**-AS11**	**81.89**
Additional KT7 Trip Contacts (Side Mount) ⓾		
1 NO SC + 1 NO SC	**-R00**	**97.43**
1 NC SC + 1 NC SC	**-R01**	**97.43**
1 NC SC + 1 NC SC	**-R11**	**97.43**

CEP7 Solid State Overload Relay ❶❷❸

(As specified in the CLT7/CLUT7 Catalog Number)

For use with contactor...	Amp Range	Last Suffix in Catalog Number ❺	Catalog Number (of Overload Relay used)
3-Phase / Manual Reset / Class 10			
CA7-9...CA7-23	0.1...0.5	**D1AB**	CEP7-ED1AB
	0.2...1.0	**D1BB**	CEP7-ED1BB
	1.0...5.0	**D1CB**	CEP7-ED1CB
3-Phase / Auto or Manual / Adjustable Trip Class 10, 15, 20 & 30			
CA7-9...CA7-23	0.1...0.5	**EAB**	CEP7-EEAB
	0.2...1.0	**EBB**	CEP7-EEBB
	1.0...5.0	**ECB**	CEP7-EECB
CA7-30...CA7-43	5.4...27	**EED**	CEP7-EEED
	9...45	**EFD**	CEP7-EEFD

CEP7 Side Mount Module Addition ❹❼❾

Addition	For use with...	Add Suffix to end of Catalog Number	Price Adder
Remote Reset Module	Side-mount to any CEP7-EE_	**-ERR**	**103.65**
Jam Protection and Remote Reset Module		**-EJM**	**114.02**
Ground Fault Protection and Remote Reset Module ❻	Side-mount to any CEP7-EE_	**-EGF**	**114.02**
Ground Fault/Jam Protection and Remote Reset Module ❻	Must use with CEP7-CBCT_ Current Sensor	**-EGJ**	**150.29**
PTC Thermistor Relay and Remote Reset Module	Side-mount to any CEP7-EE_	**-EPT**	**129.56**
Ethernet Network Communication Module	Side-mount to any CEP7-EE_	**-ETN**	**437.40**

❶ 3-phase CEP7 units are only designed for 3∅ applications.
❷ The reset time of a CEP7 set in the automatic mode is approximately 120 seconds.
❸ CEP7 Overload relays do not work with Variable Frequency Drives or any Sprecher + Schuh Softstarter with braking options.
❹ Side mount modules must have 24 - 240V, 47 - 63HZ or DC applied to terminals A1 and A2 for control power. See Section B for connection details.
❺ CEP7 Overloads shown are UL approved. Other overload combinations may be possible. Contact your Sprecher+Schuh representative.
❻ ATTENTION: The CEP7 Overload relay is not a ground fault circuit interrupter for personnel protection as defined in Article 100 of the NEC.
❼ See Section B for Technical Data, Wiring, and DIP Switch set up.
❽ For CLT7, change digit "A10" to one of the modifications listed. Example: Change CLT7-9-✱-B2S0.4-**A10**-D1AB to CLT7-9-✱-B2S0.4-**A11**-D1AB.
❾ Side mount auxiliaries and CEP7 modules change the width dimension of the device. See Dimensions in this section for more information.
⓾ Front Mount Auxiliary contacts have a maximum rating of 300VAC. Side Mounted Auxiliaries have a maximum rating of 600VAC. See page F12 for additional information.

KT7 Assembly – Application Rating Chart *(Ratings are dependent on type of application)* ❶

Rating Index	Assembly Components		Manual Controller or Group Installation				Combination Motor Controller (Type F)				Self-Protected Combination Motor Controller (Type E)	
			480V		600V		480Y / 277V		600Y / 347V		480Y / 277V	600Y / 347V
	KT7	Minimum Contactor Size	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type E KAIC	Type E KAIC
KTA7 + CA7 UL Assemblies (CL7 / CLU7/ CK7 / CKU7)												
1	**KTA7-25S-0.16A**	CA7-9	65	65	47	47	65	65	47	47	65	47
2	**KTA7-25S-0.25A**	CA7-9	65	65	47	47	65	65	47	47	65	47
3	**KTA7-25S-0.4A**	CA7-9	65	65	47	47	65	65	47	47	65	47
4	**KTA7-25S-0.63A**	CA7-9	65	65	47	47	65	65	47	47	65	47
5	**KTA7-25S-1A**	CA7-9	65	65	47	47	65	65	47	47	65	47
6	**KTA7-25S-1.6A**	CA7-9	65	65	47	47	65	65	47	47	65	47
7	**KTA7-25S-2.5A**	CA7-9	65	65	30	10	65	65	30	10	65	~
8	**KTA7-25S-4A**	CA7-9	65	50	30	~	65	~	30	~	~	~
--	KTA7-25S-4A	CA7-30	65	~	30	~	65	~	30	~	~	~
9	**KTA7-25S-6.3A**	CA7-9	65	50	30	~	65	~	~	~	~	~
11	**KTA7-25S-10A**	CA7-9	65	50	30	~	65	~	~	~	~	~
12	**KTA7-25S-16A**	CA7-12	30	~	30	~	30	~	~	~	~	~
14	KTA7-25S-16A	CA7-30	30	~	30	~	30	~	~	~	~	~
15	**KTA7-25S-20A**	CA7-16	30	~	30	~	10	~	~	~	~	~
16	**KTA7-25S-25A**	CA7-23	30	~	30	~	~	~	~	~	~	~
--	KTA7-32S-29A	CA7-30	30	10	30	~	~	~	~	~	~	~
--	KTA7-32S-32A	CA7-37	30	10	30	~	~	~	~	~	~	~
17	**KTA7-25H-2.5A**	CA7-9	65	65	30	10	65	65	30	10	65	~
18	KTA7-25H-2.5A	CA7-30	65	65	30	30	65	65	30	30	65	30
19	**KTA7-25H-4A**	CA7-9	65	65	30	~	65	65	30	~	~	~
21	KTA7-25H-4A	CA7-30	65	65	30	30	65	65	30	30	65	30
22	**KTA7-25H-6.3A**	CA7-9	65	65	30	~	65	65	30	~	~	~
23	KTA7-25H-6.3A	CA7-30	65	65	30	~	65	65	30	30	65	30
24	**KTA7-25H-10A**	CA7-9	65	65	30	~	65	65	30	~	~	~
27	KTA7-25H-10A	CA7-30	65	65	30	~	65	65	30	30	65	30
28	**KTA7-25H-16A**	CA7-12	65	65	30	~	65	65	30	~	~	~
30	KTA7-25H-16A	CA7-30	65	65	30	~	65	65	30	30	65	30
31	**KTA7-25H-20A**	CA7-23	65	65	30	~	65	65	~	~	~	~
32	KTA7-25H-20A	CA7-30	65	65	30	~	65	65	~	~	65	~
33	**KTA7-25H-25A**	CA7-23	65	65	30	~	65	65	~	~	~	~
34	KTA7-25H-25A	CA7-30	65	65	30	~	65	65	~	~	65	~
--	KTA7-32H-29A	CA7-30	65	65	30	~	~	~	~	~	~	~
--	KTA7-32H-32A	CA7-37	65	65	30	~	~	~	~	~	~	~
36	**KTA7-45H-10A**	CA7-30	65	65	30	30	65	65	30	30	65	30
37	**KTA7-45H-16A**	CA7-30	65	65	30	30	65	65	30	30	65	30
38	**KTA7-45H-20A**	CA7-30	65	65	30	30	65	65	30	30	65	30
39	**KTA7-45H-25A**	CA7-30	65	65	30	30	65	65	30	30	65	30
41	**KTA7-45H-32A**	CA7-30	65	65	30	30	65	65	30	30	65	30
45	**KTA7-45H-45A**	CA7-37	65	65	18	10	65	65	~	~	65	~
46	**KTA7-45H-45A**	CA7-43	65	65	18	10	65	65	~	~	65	~

Gray type indicates non-cataloged assembly. Contact your Sprecher+ Schuh representative for information.

❶ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules.
Engineering Practice allows wire connection as an alternative.

KT7 Assembly – Application Rating Chart *(Ratings are dependent on type of application)* ❶❷

Rating Index	Assembly Components		Manual Controller or Group Installation				Combination Motor Controller (Type F)				Self-Protected Combination Motor Controller (Type E)	
			480V		600V		480Y / 277V		600Y / 347V		480Y / 277V	600Y / 347V
	KT7	Minimum Contactor Size	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type E KAIC	Type E KAIC
KTC7 + CA7 UL Assemblies ❶												
❶	**KTC7-25S-0.16A**	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-0.25A	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-0.4A	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-0.63A	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-1A	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-1.6A	CA7-9…23	65	65	30	10	65	65	30	10	65	~
	KTC7-25S-2.5A	CA7-9…23	65	50	30	~	65	~	30	~	~	~
	KTC7-25S-2.5A	CA7-23	65	50	30	~	65	~	~	~	~	~
	KTC7-25S-4A	CA7-9…23	65	50	30	~	65	~	~	~	~	~
	KTC7-25S-6.3A	CA7-12…23	65	50	30	~	65	~	~	~	~	~
	KTC7-25S-10A	CA7-12…43	30	~	30	~	30	~	~	~	~	~
	KTC7-25S-16A	CA7-23	30	~	30	~	10	~	~	~	~	~
❶	**KTC7-25H-16A**	CA7-23	65	65	30	~	65	65	~	~	~	~
	KTC7-25H-16A	CA7-30	65	65	30	~	65	65	~	~	65	~
	KTC7-25H-20A	CA7-23	65	65	30	~	65	65	~	~	~	~
	KTC7-25H-20A	CA7-30	65	65	30	~	65	65	~	~	65	~
❶	**KTC7-45H-25A**	CA7-30	65	65	30	30	65	65	30	30	65	30
	KTC7-45H-32A	CA7-37	65	65	18	10	65	65	~	~	65	~

❶ Non-cataloged assemblies. Contact your Sprecher+ Schuh representative for information.
❷ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

KT7 Assembly – Application Rating Chart *(Ratings are dependent on type of application)* ❶

Rating Index	Assembly Components		Manual Controller or Group Installation				Combination Motor Controller (Type F)				Self-Protected Combination Motor Controller (Type E)	
			480V		600V		480Y / 277V		600Y / 347V		480Y / 277V	600Y / 347V
	KT7	Minimum Contactor Size	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type E KAIC	Type E KAIC
KTA7 + CA8 UL Assemblies (CL8 / CLU8)												
--	KTA7-25S-(0.16A…1A)	CA8-05	65	65	47	~	65	~	47	~	~	~
--	KTA7-25S-1.6A	CA8-05	65	~	47	~	65	~	47	~	~	~
--	KTA7-25S-(2.5A…4A)	CA8-05	65	~	30	~	65	~	30	~	~	~
--	KTA7-25S-6.3A	CA8-05	65	~	~	~	65	~	~	~	~	~
1M	KTA7-25S-0.16A	CA8-09	65	65	47	~	65	65	47	~	~	~
2M	KTA7-25S-0.25A	CA8-09	65	65	47	~	65	65	47	~	~	~
3M	KTA7-25S-0.4A	CA8-09	65	65	47	~	65	65	47	~	~	~
4M	KTA7-25S-0.63A	CA8-09	65	65	47	~	65	65	47	~	~	~
5M	KTA7-25S-1A	CA8-09	65	65	47	~	65	65	47	~	~	~
6M	KTA7-25S-1.6A	CA8-09	65	65	47	~	65	65	47	~	~	~
7M	KTA7-25S-2.5A	CA8-09	65	~	30	~	65	~	30	~	~	~
8M	KTA7-25S-4A	CA8-09	65	~	30	~	65	~	30	~	~	~
9M	KTA7-25S-6.3A	CA8-09	65	~	30	~	65	~	~	~	~	~
10M	KTA7-25S-10A	CA8-09	65	~	30	~	65	~	~	~	~	~
--	KTA7-25S-(2.5A…4A)	CA8-12	65	~	30	~	65	~	30	~	~	~
--	KTA7-25S-6.3A	CA8-12	65	~	~	~	65	~	~	~	~	~
11M	KTA7-25S-10A	CA8-09	65	~	~	~	65	~	~	~	~	~
12M	KTA7-25S-16A	CA8-12	30	~	30	~	30	~	~	~	~	~

Rating Index	Assembly Components			Self-Protected Combination Motor Controller (Type E KAIC) ❷		
	KT7	Minimum Contactor Size	Overload	208V-240V	480Y / 277V	600Y / 347V
KTB7 + CA7 + CEP7 UL Assemblies (CLT7 / CLUT7)						
3B	KTB7-25S-0.4A	CA7-9	CEP7-ED1AB	65	65	47
3B	KTB7-25S-0.4A	CA7-9	CEP7-EEAB	65	65	47
5B	KTB7-25S-1A	CA7-9	CEP7-ED1BB	65	65	47
5B	KTB7-25S-1A	CA7-9	CEP7-EEBB	65	65	47
7B	KTB7-25S-2.5A	CA7-9	CEP7-ED1CB	65	65	~
7B	KTB7-25S-2.5A	CA7-9	CEP7-EECB	65	65	~
17B	KTB7-25H-2.5A	CA7-9	CEP7-ED1CB	65	65	~
17B	KTB7-25H-2.5A	CA7-9	CEP7-EECB	65	65	~
18B	KTB7-25H-2.5A	CA7-23	CEP7-ED1CB	65	65	30
18B	KTB7-25H-2.5A	CA7-23	CEP7-EECB	65	65	30
21B	KTB7-25H-4A	CA7-23	CEP7-ED1CB	65	65	30
21B	KTB7-25H-4A	CA7-23	CEP7-EECB	65	65	30
27B	KTB7-25H-10A	CA7-30	CEP7-EEED	65	65	30
30B	KTB7-25H-16A	CA7-30	CEP7-EEED	65	65	30
34B	KTB7-25H-25A	CA7-30	CEP7-EEED	65	65	~
39B	KTB7-45H-25A	CA7-30	CEP7-EEED	65	65	30
41B	KTB7-45H-32A	CA7-30	CEP7-EEFD	65	65	30
42B	KTB7-45H-32A	CA7-37	CEP7-EEFD	65	65	30
45B	KTB7-45H-45A	CA7-37	CEP7-EEFD	65	65	~
46B	KTB7-45H-45A	CA7-43	CEP7-EEFD	65	65	~

Definition of Type 2 short-circuit coordination per UL508

- The contactor or starter must not endanger persons or plant in the event of a short-circuit.
- The contactor or starter must be suitable for continuous use.
- No damage to the overload relay or other parts may occur with the exception of welding of the contactor or starter contacts if these can be easily separated without appreciable deformation (such as with a screwdriver).

In the event of a short-circuit, fast-opening, strong current-limiting KT7 motor protectors make it possible to build economical, fully short-circuit coordinated starter combinations in accordance with UL508E, Type 2 coordination.

Gray type indicates non-cataloged assembly. Contact your Sprecher+ Schuh representative for information.

❶ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

❷ UL approved, File 125316.

KT7 Assembly – IEC Application Rating Chart *(Ratings are dependent on type of application)* ❶

Rating Index	Assembly Components		IEC kW Ratings for Standard Motors, 1500 rpm Max. kW, 50Hz ❷				Max. Short-Circuit Current [kA] IEC Type 1 Coordination				Max. Short-Circuit Current [kA] IEC Type 2 Coordination			
	KT7	Min. Contactor	230V	400V	500V	690V	230V	400V	500V	690V	230V	400V	500V	690V
KTA7 + CA7 IEC Assemblies (CL7 / CLU7/ CK7 / CKU7)														
1	**KTA7-25S-0.16A**	CA7-9	~	~	0.06	0.06	100	100	65	50	100	100	65	50
2	**KTA7-25S-0.25A**	CA7-9	0.02	0.06	0.06	0.12	100	100	65	50	100	100	65	50
3	**KTA7-25S-0.4A**	CA7-9	0.06	0.09	0.12	0.18	100	100	65	50	100	100	65	50
4	**KTA7-25S-0.63A**	CA7-9	0.09	0.18	0.18	0.37	100	100	65	50	100	100	65	50
5	**KTA7-25S-1A**	CA7-9	0.12	0.25	0.37	0.55	100	100	65	50	100	100	65	50
6	**KTA7-25S-1.6A**	CA7-9	0.25	0.55	0.75	1.1	100	100	65	50	100	100	65	50
7	**KTA7-25S-2.5A**	CA7-9	0.55	0.75	1.1	1.8	100	65	50	8	65	50	50	8
8	**KTA7-25S-4A**	CA7-9	0.75	1.5	2.2	3	100	50	50	8	50	50	~	~
9	**KTA7-25S-6.3A**	CA7-9	1.5	2.2	3	4	100	50	50	4	50	50	~	~
10	**KTA7-25S-10A**	CA7-9	2.2	4	4	~	100	65	50	~	50	50	~	~
11	**KTA7-25S-10A**	CA7-12	2.2	4	5.5	5.5	100	65	50	4	50	50	50	~
--	**KTA7-25S-10A**	CA7-16	2.2	4	5.5	7.5	100	65	50	4	50	50	50	~
12	**KTA7-25S-16A**	CA7-12	4	5.5	~	~	100	65	~	~	50	50	~	~
--	**KTA7-25S-16A**	CA7-16	4	7.5	7.5	~	100	50	10	~	50	~	~	~
14	**KTA7-25S-16A**	CA7-23	4	7.5	10	10	100	50	10	3	50	50	~	~
15	**KTA7-25S-20A**	CA7-23	4	10	11	~	50	15	6	~	15	~	~	~
16	**KTA7-25S-25A**	CA7-23	6.3	11	13	~	50	15	6	~	15	~	~	~
17	**KTA7-25H-2.5A**	CA7-9	0.55	0.75	1.1	1.8	100	100	50	10	100	100	50	10
18	**KTA7-25H-2.5A**	CA7-23	0.55	0.75	1.1	1.8	100	100	50	10	100	100	50	10
19	**KTA7-25H-4A**	CA7-9	0.75	1.5	2.2	3	100	100	50	10	100	100	50	~
21	**KTA7-25H-4A**	CA7-23	0.75	1.5	2.2	3	100	100	50	50	100	100	50	50
22	**KTA7-25H-6.3A**	CA7-9	1.5	2.2	3	4	100	100	50	50	100	100	50	~
--	**KTA7-25H-10A**	CA7-9	2.2	4	4	~	100	65	50	~	100	65	~	~
24	**KTA7-25H-10A**	CA7-12	2.2	4	5.5	5.5	100	100	65	50	100	100	65	~
--	**KTA7-25H-10A**	CA7-16	2.2	4	5.5	7.5	100	100	65	50	100	100	65	50
--	**KTA7-25H-16A**	CA7-12	4	5.5	~	~	100	65	~	~	65	65	~	~
28	**KTA7-25H-16A**	CA7-16	4	7.5	7.5	~	100	65	50	~	65	65	50	~
--	**KTA7-25H-16A**	CA7-23	4	7.5	10	10	100	65	50	6	65	65	50	~
31	**KTA7-25H-20A**	CA7-23	4	10	11	~	65	65	25	~	65	65	25	~
33	**KTA7-25H-25A**	CA7-23	6.3	11	13	~	65	50	25	~	65	50	25	~
KTA7 + CA8 IEC Assemblies (CL8 / CLU8)														
1M	**KTA7-25S-0.16A**	CA8-09	~	0.02	~	~	100	65	65	65	65	65	~	~
2M	**KTA7-25S-0.25A**	CA8-09	0.02	0.06	0.06	~	100	65	65	65	65	65	~	~
3M	**KTA7-25S-0.4A**	CA8-09	0.06	0.09	0.12	~	100	65	65	65	65	65	~	~
4M	**KTA7-25S-0.63A**	CA8-09	0.09	0.18	0.18	~	100	65	65	65	65	65	~	~
5M	**KTA7-25S-1A**	CA8-09	0.12	0.25	0.37	~	100	65	65	65	65	65	~	~
6M	**KTA7-25S-1.6A**	CA8-09	0.25	0.55	0.75	~	100	65	65	10	65	65	~	~
7M	**KTA7-25S-2.5A**	CA8-09	0.55	0.75	1.1	~	100	65	65	8	65	65	~	~
8M	**KTA7-25S-4A**	CA8-09	0.75	1.5	2.2	~	100	65	65	8	50	50	~	~
9M	**KTA7-25S-6.3A**	CA8-09	1.5	2.2	2.2	~	100	65	65	4	~	~	~	~
10M	**KTA7-25S-10A**	CA8-09	2.2	4	4	~	100	65	65	4	~	~	~	~
11M	**KTA7-25S-10A**	CA8-12	2.2	4	4	~	100	65	65	4	~	~	~	~
12M	**KTA7-25S-16A**	CA8-12	4	5.5	~	~	100	50	50	3	~	~	~	~

Gray type indicates non-cataloged assembly. Contact your Sprecher+ Schuh representative for information.

❶ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

❷ kW ratings shown in the table are for reference. Final selection of the starter depends upon the actual motor full-load current and service factor.

Ecombo*Plus* Combination Starters

CK7-9...23

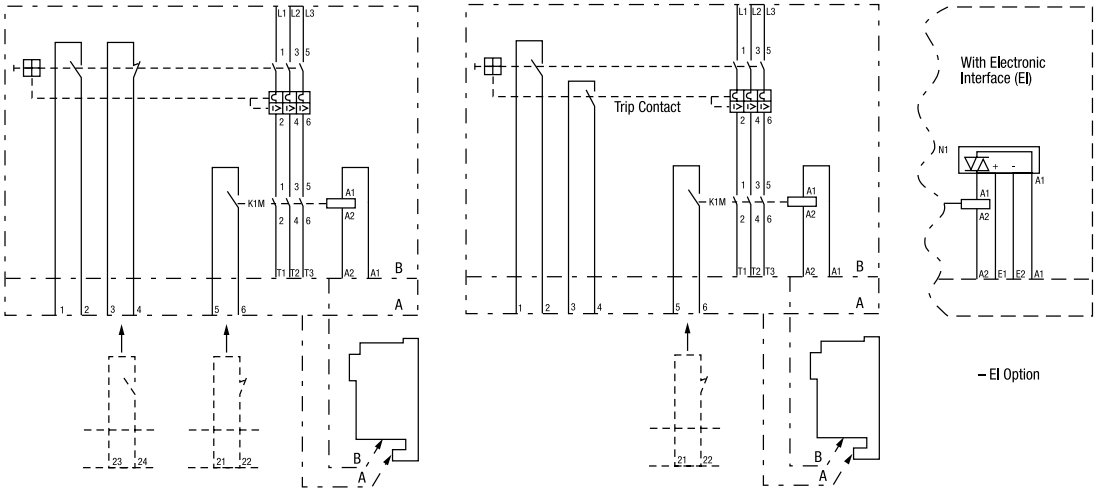

CK7-30...43

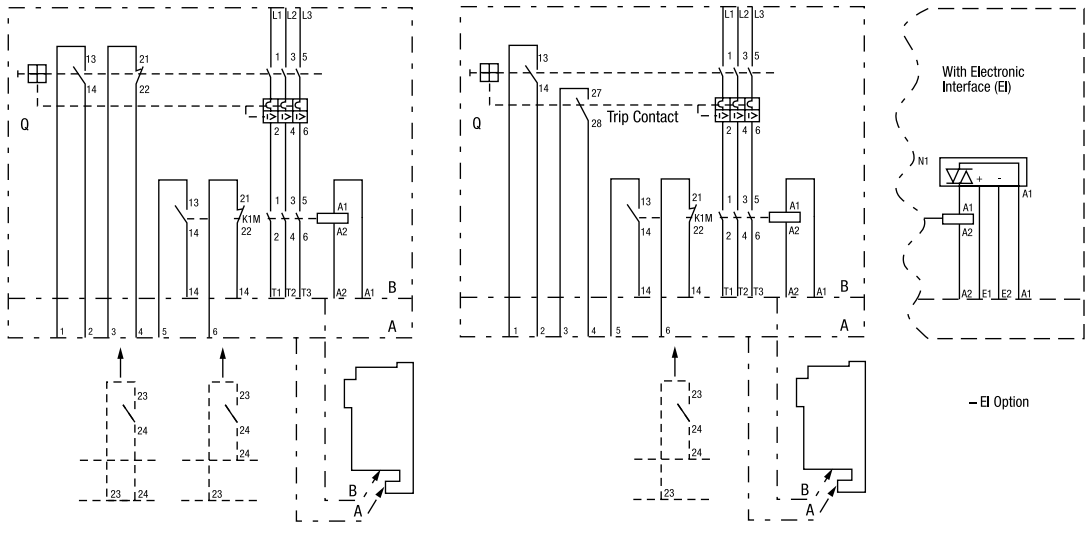

3-Component ECombo Starters

CLT7-9...43 Typical Diagram

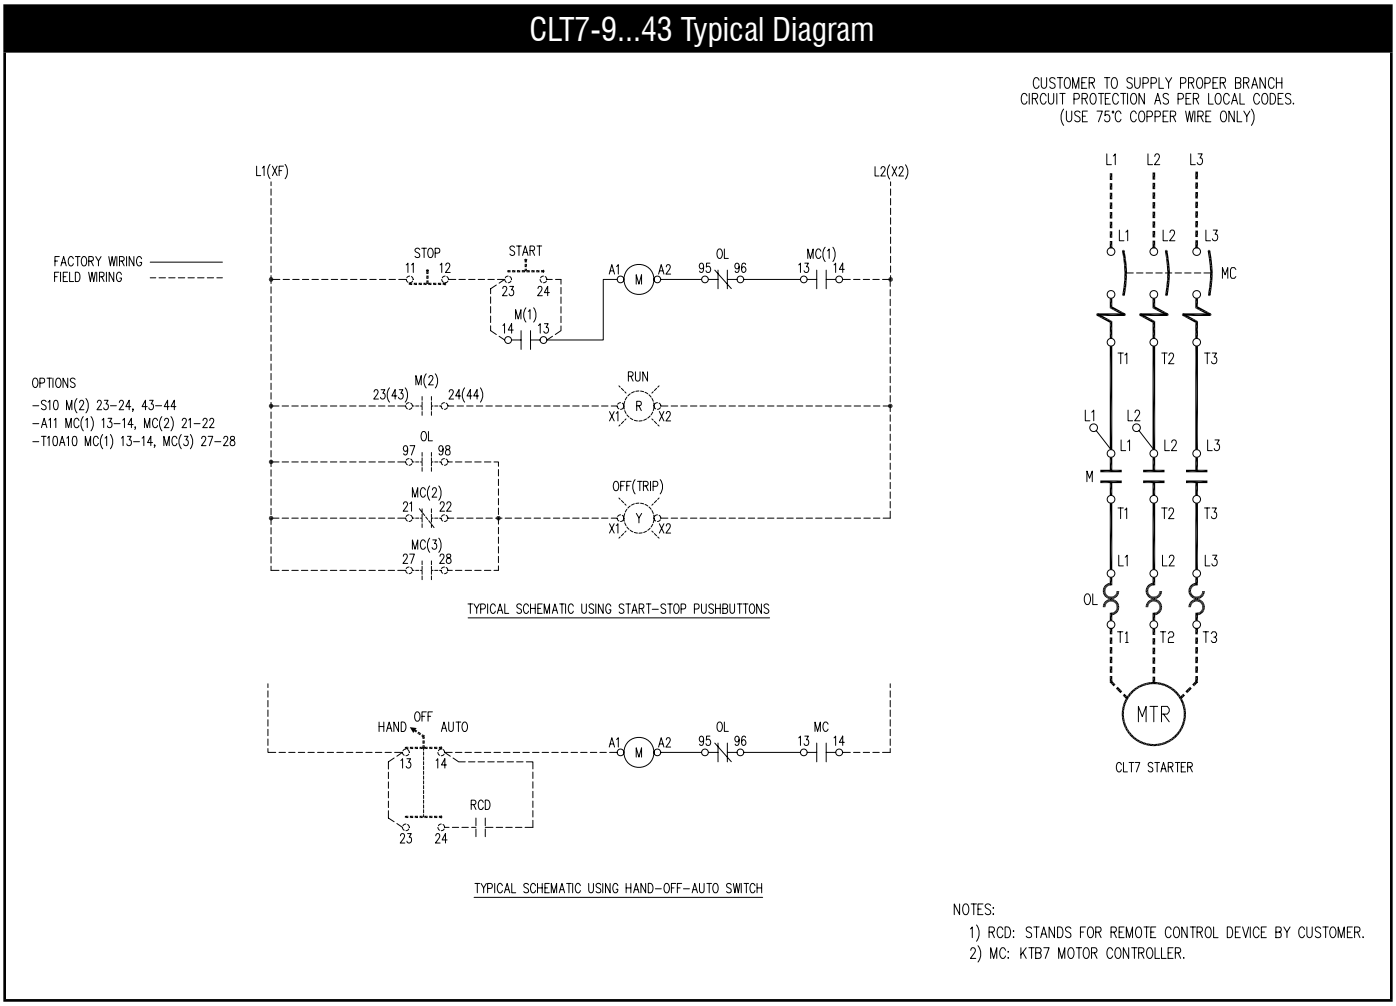

Ecombo Combination Starters

CL8 and CLU8 Ecombo Starters with KT7-25S

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

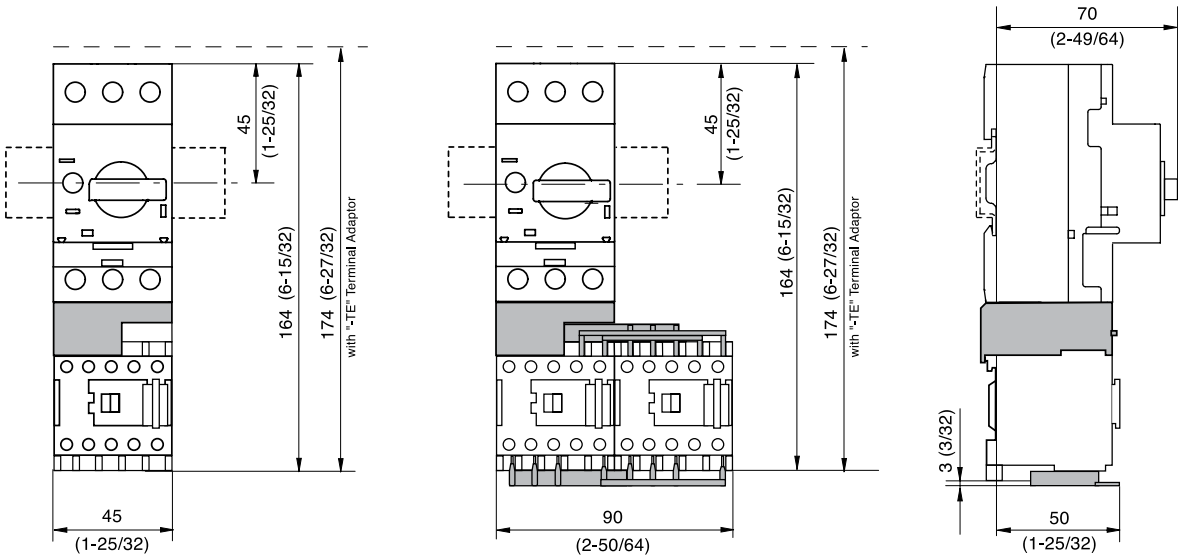

CL7-9…23(E) and CLU7-9…23(E) Ecombo Starters with KT7-25S

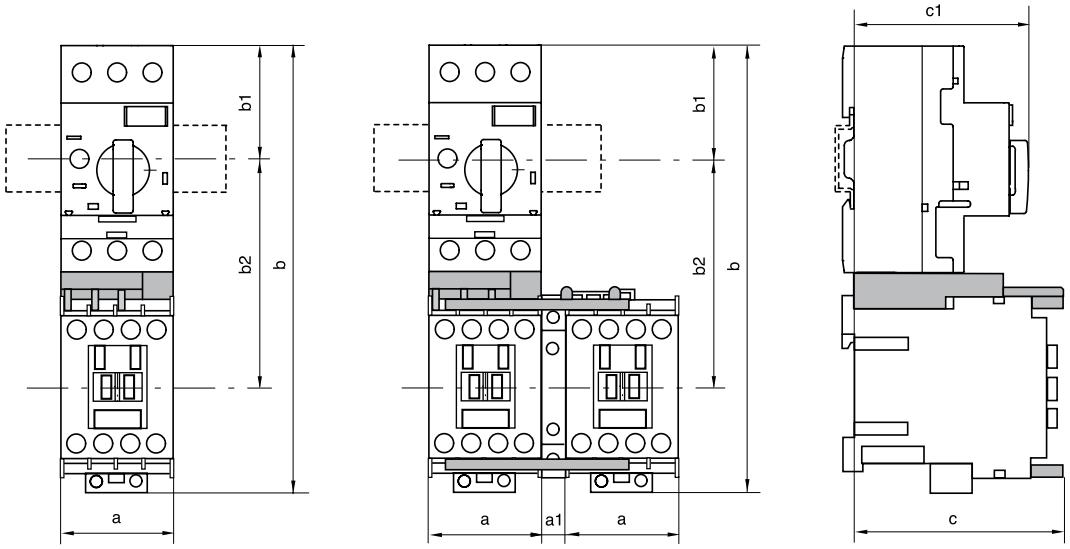

Catalog Number ❶	a	a1	b	b1	b2	c	c1
CL7-9(E)...CL7-23(E)	45 (1-25/32)	0	178 (7)	45 (1-25/32)	~	83.5 (3-19/64)	70 (2-49/64)
CL7-9(E)...CL7-23(E) with -TE1 Terminal Adaptor	45 (1-25/32)	0	188 (7-13/32)	55 (2-5/32)	~	83.5 (3-19/64)	70 (2-49/64)
CLU7-9(E)...CLU7-23(E)	45 (1-25/32)	10 (25/64)	178 (7)	45 (1-25/32)	~	83.5 (3-19/64)	70 (2-49/64)
CLU7-9(E)...CLU7-23(E) with -TE1 Terminal Adaptor	45 (1-25/32)	10 (25/64)	188 (7-13/32)	55 (2-5/32)	~	83.5 (3-19/64)	70 (2-49/64)

❶ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

Ecombo Combination Starters

CL7-30…43(E) and CLU7-30…43(E) Ecombo Starters with KT7-45H

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

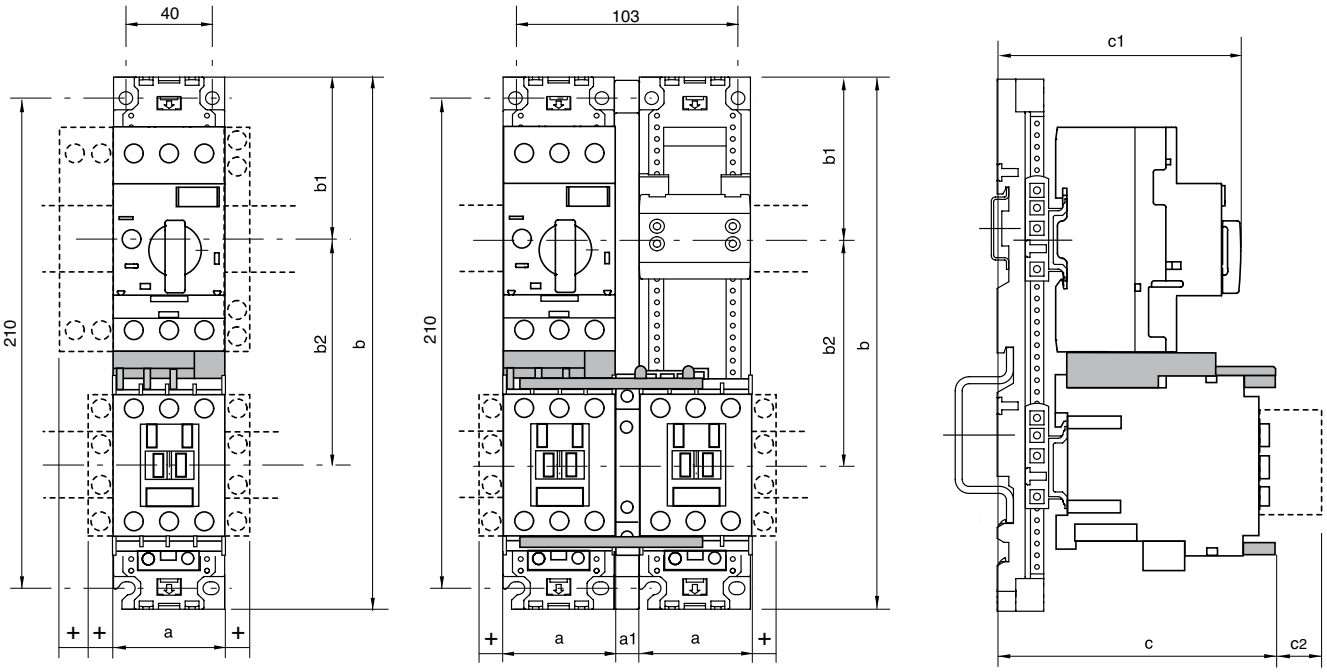

Catalog Number ❶❷	a	a1	b	b1	b2	c	c1	c2	+
CL7-30(E)	54 (2.125)	~	228 (8.97)	69 (2.72)	105 (4.30)	122.5 (4.82)	134.5 (5.29)	~	9
CL7-37(E)	54 (2.125)	~	228 (8.97)	69 (2.72)	105 (4.30)	122.5 (4.82)	134.5 (5.29)	~	9
CL7-43(E)	54 (2.125)	~	228 (8.97)	69 (2.72)	105 (4.30)	136 (5.35)	137 (5.39)	31 (1.22)	9
CLU7-30(E)	54 (2.125)	9	228 (8.97)	69 (2.72)	105 (4.30)	122.5 (4.82)	134.5 (5.29)	~	9
CLU7-37(E)	54 (2.125)	9	228 (8.97)	69 (2.72)	105 (4.30)	122.5 (4.82)	134.5 (5.29)	~	9
CLU7-43(E)	54 (2.125)	9	228 (8.97)	69 (2.72)	105 (4.30)	136 (5.35)	137 (5.39)	31 (1.22)	9

❶ CL7-30..43(E) and CLU7-30..43(E) include W-32490 Mounting Module. CLU7 includes W-32955 Spacer.

❷ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accomodate back pack on 36V… 250V Electronic DC coils. See page A86 for details.

Ecombo*Plus* Combination Starters

CK7-9…23 and CKU7-9…23 Ecombo*Plus* Starters

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

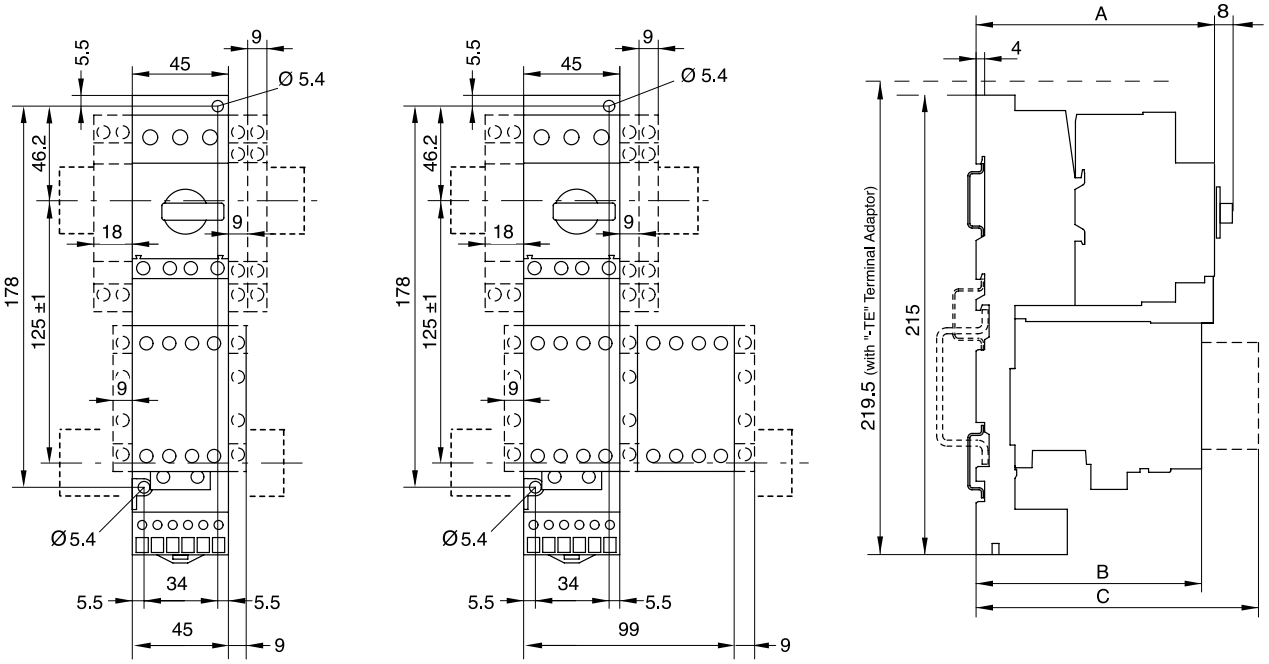

		A (mm)	B (mm)		C (mm)
Direct on-line starters ❶					
CK7-9(E)	KT7-25S	112	107	CA7-PV, CS7-PV CZE-7, CZA7 CV7	138 157 160
CK7-12(E)					
CK7-16(E)	KT7-25H	122			
CK7-23(E)					
Reversing Starters					
CKU7-9	KT7-25S	112	107	CA7-PV, CS7-PV CZE7, CZA7 CV7	138 157 160
CKU7-12					
CKU7-16	KT7-25H	122			
CKU7-23					

❶ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accomodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

Ecombo*Plus* Combination Starters

CK7-9…23

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

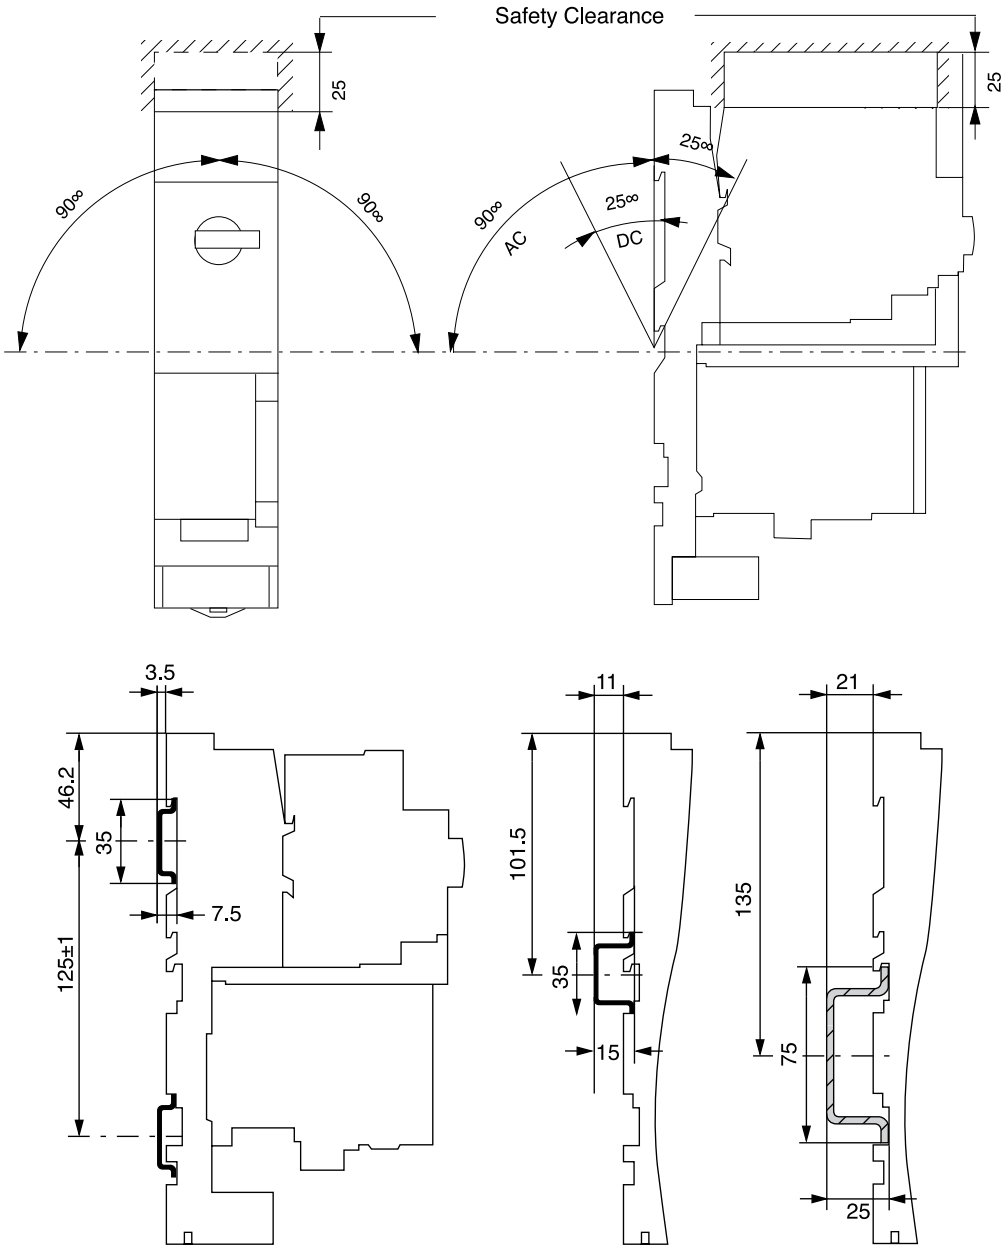

Ecombo*Plus* Combination Starters

CK7-30…37

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

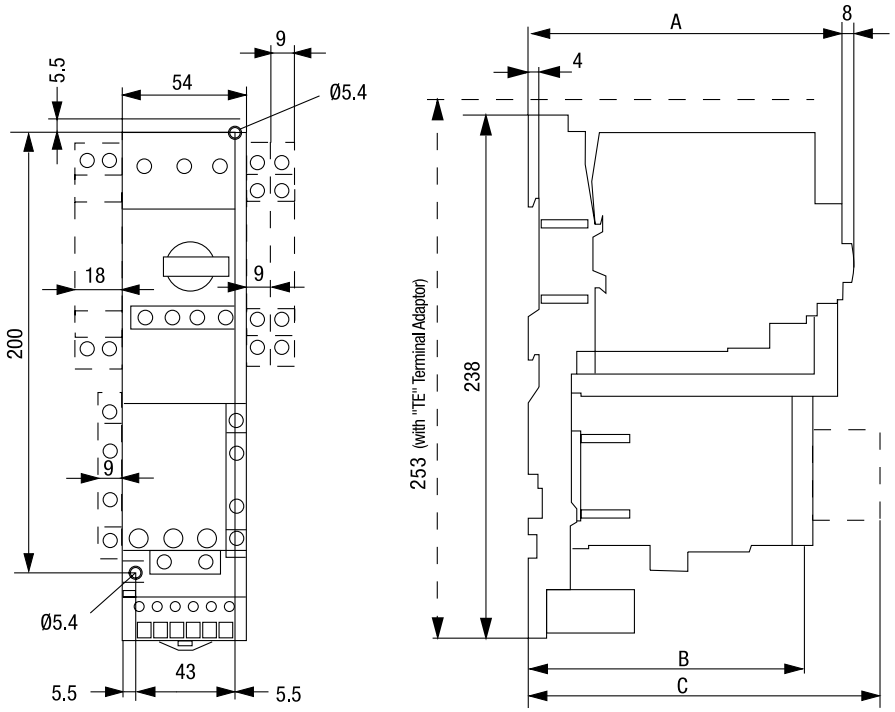

		A (mm)	B (mm)
CK7-30(E) ❶	KT7-45H	135	124
CK7-37(E) ❶			

❶ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accomodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

	C (mm)
CA7-PV	154.5
CZE7	173.5
CV7	176.5

Ecombo*Plus* Combination Starters

CK7-43

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

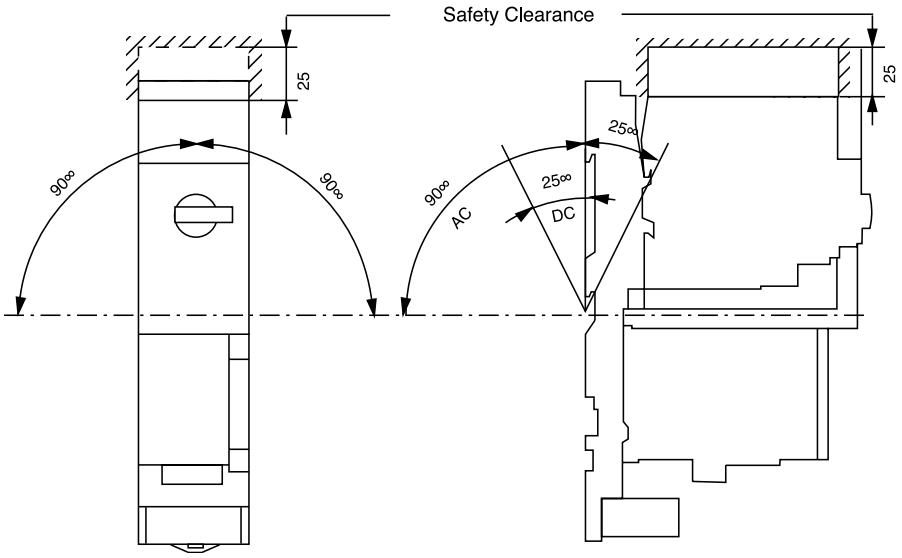

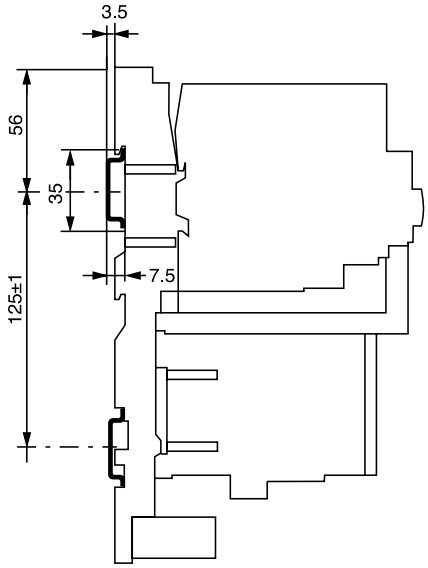

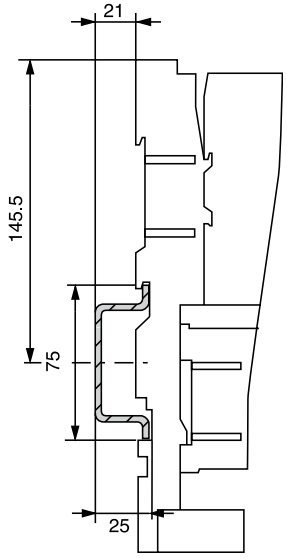

See previous page for dimensions A , B & C locations

		A (mm)	B (mm)
CK7-43(E) ❶	KT7-45H	135	118.5

❶ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accomodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

	C (mm)
CA7-PV	157
CZE7	176
CV7	179

Non-Reversing Three Component Combination Starters ❸

KTB7-25S + CA7-9...23 + CEP7-ED1/EE

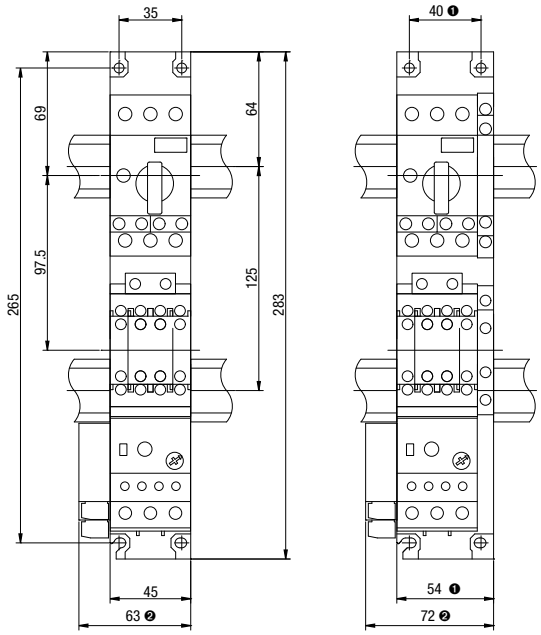

KTB7-25H + CA7-30...37 + CEP7-EE

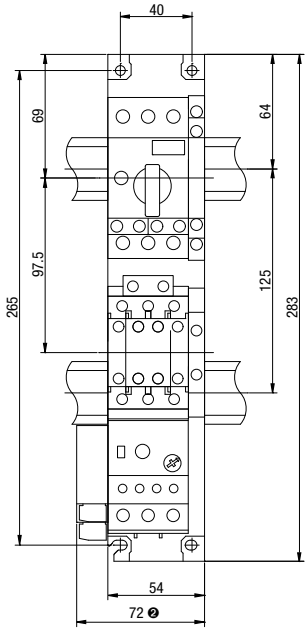

KTB7-45H + CA7-30...37 + CEP7-EE

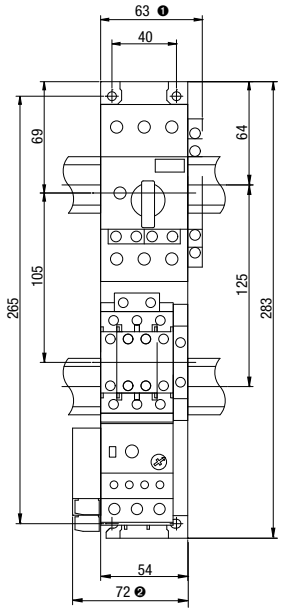

KTB7-45H + CA7-43 + CEP7-EE

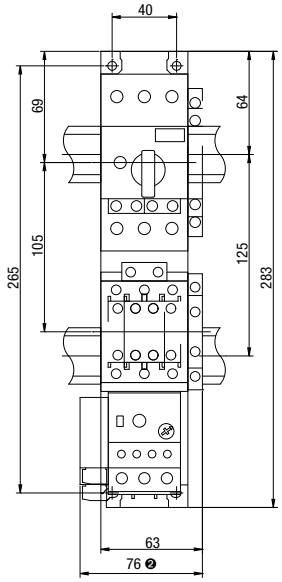

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

❶ With additional side mount auxiliary or trip contact(s)
❷ With CEP7-E* Side Mount Modules
❸ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

Reversing Three Component Combination Starters ❷

KTB7-25S + CAU7-9...37 + CEP7-ED1/EE

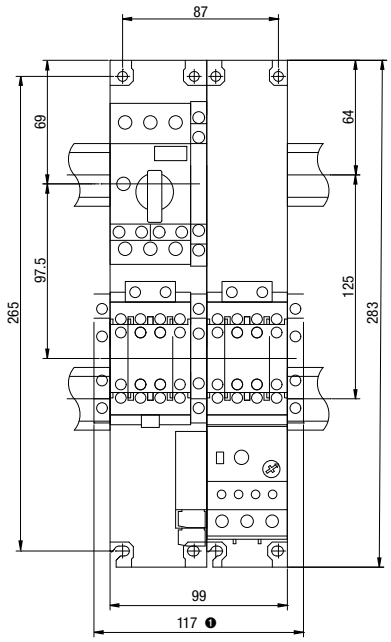

KTB7-45H + CA7-30...37 + CEP7-EE

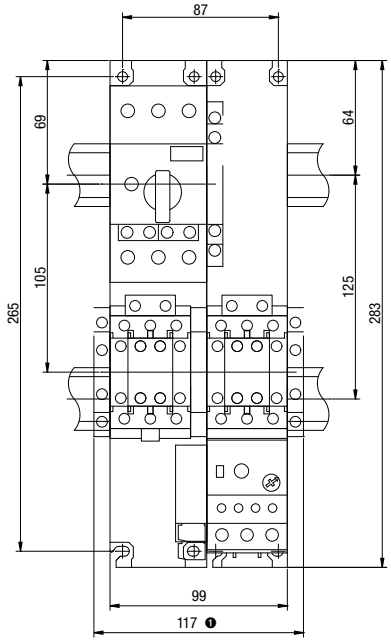

KTB7-45H + CA7-43 + CEP7-EE

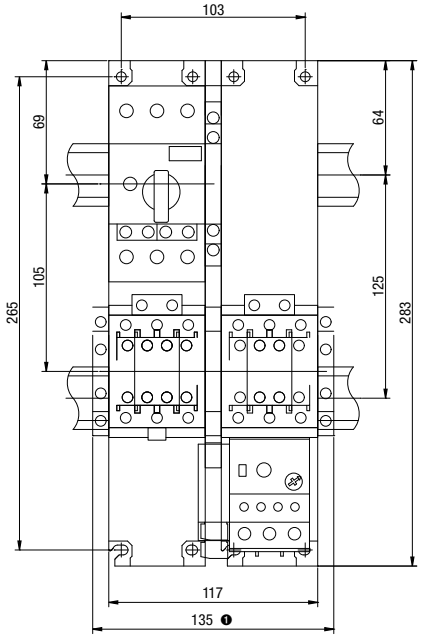

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

❶ With additional side mount auxiliary contact(s)

❷ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

Notes

Enclosed Motor Controllers and Molded Case Circuit Breakers

KTA7 Type-E Self Protected Manual Motor Controllers
Page F89

Explosion-Proof Motor Controllers

KTA7_EX
Page F93

KTA7_EZ
Page F94

The following pages contain a selection of single enclosed KTA7 & KTC7 motor controllers which can be applied as an individual Manual Self-Protected Combination Motor Controller or as an individual Manual Motor Starter dependent on the ratings of the individual unit.

- A Self-protected Combination Motor Controller (UL508 Construction Type E) performs all the functions of a Manual Combo starter including a UL approved means "Disconnect" with lockable and defeatable handle mechanism, short-circuit protection and overload protection for motor applications.
- A UL508 Manual Motor Controller is a manual motor starter including a motor disconnect combined with an overload relay.

Both can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements. The section that follows includes non-metallic enclosures, metallic enclosures and explosion-proof enclosures.

Enclosed Molded Case Circuit Breakers

The following pages contain a selection of individual enclosed KTU7 molded case circuit breakers for the protection of non-motor loads. KTU7 is a 480Y/277Volt or 600Y/347 volt UL489 approved circuit breaker and the selection of enclosures or combined with matching environmentally approved thru-the-door handle disconnect mechanism which also complies with UL489 standards. KTU7 offers at least 65 KAIC withstand ratings which exceeds those offered by many 600 Volt Class Molded Case Circuit Breakers which are larger and more expensive. Enclosed KTU7 can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements.

KTU7 Molded Case Circuit Breakers
Page F95

Enclosed Type E/F Combination Starters

KTA7 or KTC7 can be applied in combination with a CA7 contactor for remote control and an enclosure with matching environmentally approved thru-the-door handle disconnect mechanism to meet all requirements for a Construction Type E or F Combination Starter. The following pages contain a selection of individual Combo starters which are smaller and less expensive than Classic Construction Type A (Fusible), or Type C (Thermal-magnetic Molded Case Circuit Breaker) as offered in Section C of this catalog. The following types are offered:

CX7 Ecombo KWIKStarters
Page F98

- Non-metallic enclosed Combo KwikStarter CX7 and CXU7 with AC or DC coils available as factory assembled or in kit form for field assembly
- Metallic enclosed Combo CX7 and CXU7with AC or DC coils
- Explosion-proof enclosed CX7 and CXU7with AC or DC coils

A variety of modifications are available.

CX7 Combination Controllers
Page F105

Enclosed KTA7 - IP65

Amp / Horsepower Rating										Non-metallic (IP65) Enclosure
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❹	Price	Dimension Code
Single Phase		Three Phase								
115V	230V	200V	230V	460V	575V					
KTA7-25S/32S Standard Interrupting Capacity										
~	~	~	~	~	~	0.10…0.16	2.1	**KTA7-25S-0.16A-CG**	**380.40**	AY
~	~	~	~	~	~	0.16…0.25	3.3	**KTA7-25S-0.25A-CG**	**380.40**	AY
~	~	~	~	~	1/4	0.25…0.40	5.2	**KTA7-25S-0.4A-CG**	**380.40**	AY
~	~	~	~	1/4	1/3	0.40…0.63	8.2	**KTA7-25S-0.63A-CG**	**414.60**	AY
~	~	~	~	1/2	3/4	0.63…1.0	13	**KTA7-25S-1A-CG**	**414.60**	AY
~	1/10	1/4	1/3	1	1	1.0…1.6	21	**KTA7-25S-1.6A-CG**	**414.60**	AY
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	**KTA7-25S-2.5A-CG**	**414.60**	AY
1/8	1/3	1	1	3	3	2.5…4	52	**KTA7-25S-4A-CG**	**414.60**	AY
1/4	3/4	1-1/2	2	5	5 ❻	4…6.3	82	**KTA7-25S-6.3A-CG**	**414.60**	AY
1/2	1-1/2	3	3	7-1/2	10 ❻	6.3…10	130	**KTA7-25S-10A-CG**	**414.60**	AY
1	3	5	5	10	15 ❻	10…16	208	**KTA7-25S-16A-CG**	**449.85**	AY
1-1/2	3	5	7-1/2	15	20 ❻	14.5…20	260	**KTA7-25S-20A-CG**	**449.85**	AY
2	3	7-1/2❻	7-1/2❻	20 ❻	20 ❻	18…25	325	**KTA7-25S-25A-CG** ❻	**449.85**	AY
2	5	7-1/2❻	10 ❻	20 ❻	25 ❻	24…29	409	**KTA7-32S-29A-CG** ❻	**554.53**	AY
3	5	7-1/2❻	10 ❻	25 ❻	30 ❻	27…32	448	**KTA7-32S-32A-CG** ❻	**554.53**	AY

Includes:

- Non-metallic (IP65) enclosure with integrated IP65 operator – watertight, dusttight
- KT7-25S/32S (Standard Interrupting Capacity) "Type E" Self-protected Combination Manual Controller ❺
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- Gray and black IP65 handle ❹❺

Enclosure Only

Description	Catalog Number	Price
Gray/Black handle	**KT7-AYTG2**	**144.08**
Red/Yellow handle	**KT7-AYTJ2**	**144.08**
Accessory		
Ground (PE) Terminal	**KS7-AYMTN**	**7.25**

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number	Price Adder
KT7 Auxiliaries & Trip Contacts, Front Mount 300V max.		
1 NO Auxiliary	**-A10**	**64.26**
1 NC Auxiliary	**-A01**	**64.26**
1 NO + 1 NC Auxiliary	**-A11**	**71.52**
2 NO Auxiliaries	**-A20**	**71.52**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01** **-T10A10**	**89.14** **89.14**
1 NO SC+OL + 1 NO Auxiliary		
Side Mount 600V max.		
2 NC Auxiliaries	**-AS02**	**81.89**
2 NO Auxiliaries	**-AS20**	**81.89**
1 NO + 1 NC Auxiliary	**-AS11**	**81.89**
Additional KT7 Trip Contacts, Side Mount 600V max.		
1 NO SC+OL+1 NO SC	**-R00**	**97.43**
1 NO SC+OL+1 NC SC	**-R01**	**97.43**
1 NC SC+OL+1 NO SC	**-R10**	**97.43**
Accessories		
Undervoltage Release Module	**-UA-✱**	**130.60**
Shunt Release Module	**-AA-✱**	**130.60**

This item is available in the ORANGE EXPRESS 3-day shipping program

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24V	21V	24V
28V	24V	28V
120V	**105V**	**120V**
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V
600V	550V	600V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "CG" suffix to "CJ". Ex: Change KTA7-25S-0.16-CG to KTA7-25S-0.16-CJ.

❺ Handles are built-in to the enclosure and are not available as components.

❻ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTA7 - Type 4 / 4X / 12

Amp / Horsepower Rating										
Max. Horsepower ❶❷❸						**O/L Relay Ampere Range**	**Magnetic Res. Current**	**Catalog Number ❹**	**Price**	**Dimension Code**
Single Phase		**Three Phase**								
115V	**230V**	**200V**	**230V**	**460V**	**575V**					
KTA7-25S/32S Standard Interrupting Capacity										
~	~	~	~	~	~	0.10…0.16	2.1	**KTA7-25S-0.16A-VG**	**558.68**	Q5
~	~	~	~	~	~	0.16…0.25	3.3	**KTA7-25S-0.25A-VG**	**558.68**	Q5
~	~	~	~	~	1/4	0.25…0.40	5.2	**KTA7-25S-0.4A-VG**	**558.68**	Q5
~	~	~	~	1/4	1/3	0.40…0.63	8.2	**KTA7-25S-0.63A-VG**	**583.56**	Q5
~	~	~	~	1/2	3/4	0.63…1.0	13	**KTA7-25S-1A-VG**	**583.56**	Q5
~	1/10	1/4	1/3	1	1	1.0…1.6	21	**KTA7-25S-1.6A-VG**	**583.56**	Q5
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	**KTA7-25S-2.5A-VG**	**583.56**	Q5
1/8	1/3	1	1	3	3	2.5…4	52	**KTA7-25S-4A-VG**	**583.56**	Q5
1/4	3/4	1-1/2	2	5	5 ❺	4…6.3	82	**KTA7-25S-6.3A-VG**	**583.56**	Q5
1/2	1-1/2	3	3	7-1/2	10 ❺	6.3…10	130	**KTA7-25S-10A-VG**	**583.56**	Q5
1	3	5	5	10	15 ❺	10…16	208	**KTA7-25S-16A-VG**	**627.09**	Q5
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	**KTA7-25S-20A-VG**	**627.09**	Q5
2	3	7-1/2❻	7-1/2 ❺	20 ❺	20 ❺	18…25	325	**KTA7-25S-25A-VG ❺**	**627.09**	Q5
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	**KTA7-32S-29A-VG ❺**	**731.78**	Q5
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	**KTA7-32S-32A-VG ❺**	**731.78**	Q5
KTA7-25H/32H High Interrupting Capacity										
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	**KTA7-25H-2.5A-VG**	**651.97**	Q6
1/8	1/3	1	1	3	3	2.5…4	52	**KTA7-25H-4A-VG**	**651.97**	Q6
1/4	1/2	1-1/2	2	5	5	4…6.3	82	**KTA7-25H-6.3A-VG**	**651.97**	Q6
1/2	1-1/2	3	3	7-1/2	10	6.3…10	130	**KTA7-25H-10A-VG**	**695.50**	Q6
1	3	5	5	10	15	10…16	208	**KTA7-25H-16A-VG**	**695.50**	Q6
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	**KTA7-25H-20A-VG**	**695.50**	Q6
2	3	7-1/2	7-1/2	20	20 ❺	18…25	325	**KTA7-25H-25A-VG**	**695.50**	Q6
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	**KTA7-32H-29A-VG ❺**	**831.28**	Q6
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	**KTA7-32H-32A-VG ❺**	**831.28**	Q6
KTA7-45H High Interrupting Capacity										
1/2	1-1/2	3	3	7-1/2	7-1/2	6.3…10	130	**KTA7-45H-10A-VG**	**1,288.39**	Q7
1	3	5	5	10	10	10…16	208	**KTA7-45H-16A-VG**	**1,288.39**	Q7
1-1/2	3	5	7-1/2	15	15	14.5…20	260	**KTA7-45H-20A-VG**	**1,288.39**	Q7
2	3	~	10	20	20	18…25	325	**KTA7-45H-25A-VG**	**1,288.39**	Q7
3	5	7-1/2	10	25	30	23…32	416	**KTA7-45H-32A-VG**	**1,349.54**	Q7
3	7-1/2	10	15	30	40 ❺	32…45	585	**KTA7-45H-45A-VG**	**1,349.54**	Q7

Non-metallic, Type 4 / 4X / 12 Enclosure



Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTA7 "Type E" Self-protected Combination Manual Controller (Standard Interrupting Capacity) ❺
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number	Price Adder
KT7 Auxiliaries & Trip Contacts, Front Mount 300V max.		
1 NO Auxiliary	**-A10**	**64.26**
1 NC Auxiliary	**-A01**	**64.26**
1 NO + 1 NC Auxiliary	**-A11**	**71.52**
2 NO Auxiliaries	**-A20**	**71.52**
1 NO SC+OL + 1 NC	**-T10A01**	**89.14**
1 NO SC+OL + 1 NO	**-T10A10**	**89.14**
Side Mount 600V max.		
2 NC Auxiliaries	**-AS02**	**81.89**
2 NO Auxiliaries	**-AS20**	**81.89**
1 NO + 1 NC Auxiliary	**-AS11**	**81.89**
Additional KT7 Trip Contacts, Side Mount 600V max.		
1 NO SC+OL+1 NO SC	**-R00**	**97.43**
1 NO SC+OL+1 NC SC	**-R01**	**97.43**
1 NC SC+OL+1 NO SC	**-R10**	**97.43**
Accessories		
Undervoltage Release Module	**-UA-✱**	**130.60**
Shunt Release Module	**-AA-✱**	**130.60**

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24V	21V	24V
28V	24V	28V
120V	**105V**	**120V**
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V
600V	550V	600V

This item is available in the ORANGE EXPRESS 3-day shipping program

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "VG" suffix to "VJ". Ex: Change KTA7-25S-0.16-**VG** to KTA7-25S-0.16-**VJ**.

❺ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTA7 - Type 12

Painted Steel, Type 12 Enclosure

Amp / Horsepower Rating										
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❹	Price	Dimension Code
Single Phase		Three Phase								
115V	230V	200V	230V	460V	575V					
KTA7-25S/32S Standard Interrupting Capacity										
~	~	~	~	~	~	0.10…0.16	2.1	KTA7-25S-0.16A-DG	599.11	L
~	~	~	~	~	~	0.16…0.25	3.3	KTA7-25S-0.25A-DG	599.11	L
~	~	~	~	~	1/4	0.25…0.40	5.2	KTA7-25S-0.4A-DG	599.11	L
~	~	~	~	1/4	1/3	0.40…0.63	8.2	KTA7-25S-0.63A-DG	631.24	L
~	~	~	~	1/2	3/4	0.63…1.0	13	KTA7-25S-1A-DG	631.24	L
~	1/10	1/4	1/3	1	1	1.0…1.6	21	KTA7-25S-1.6A-DG	631.24	L
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25S-2.5A-DG	631.24	L
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25S-4A-DG	631.24	L
1/4	3/4	1-1/2	2	5	5 ❺	4…6.3	82	KTA7-25S-6.3A-DG	631.24	L
1/2	1-1/2	3	3	7-1/2	10 ❺	6.3…10	130	KTA7-25S-10A-DG	631.24	L
1	3	5	5	10	15 ❺	10…16	208	KTA7-25S-16A-DG	631.24	L
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25S-20A-DG	666.48	L
2	3	7-1/2 ❺	7-1/2 ❺	20 ❺	20 ❺	18…25	325	KTA7-25S-25A-DG ❺	666.48	L
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32S-29A-DG ❺	771.17	L
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32S-32A-DG ❺	771.17	L
KTA7-25H/32H High Interrupting Capacity										
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25H-2.5A-DG	691.35	L
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25H-4A-DG	691.35	L
1/4	1/2	1-1/2	2	5	5	4…6.3	82	KTA7-25H-6.3A-DG	691.35	L
1/2	1-1/2	3	3	7-1/2	10	6.3…10	130	KTA7-25H-10A-DG	735.92	L
1	3	5	5	10	15	10…16	208	KTA7-25H-16A-DG	735.92	L
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25H-20A-DG	735.92	L
2	3	7-1/2	7-1/2	20	20 ❺	18…25	325	KTA7-25H-25A-DG	735.92	L
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32H-29A-DG ❺	871.70	L
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32H-32A-DG ❺	871.70	L

Includes:

- Type 12 enclosure – dusttight
- KT7-25S/32S (Standard Interrupting Capacity) "Type E" Self-protected Combination Manual Controller ❺
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number	Price Adder
KT7 Auxiliaries & Trip Contacts, Front Mount 300V max.		
1 NO Auxiliary	-A10	64.26
1 NC Auxiliary	-A01	64.26
1 NO + 1 NC Auxiliary	-A11	71.52
2 NO Auxiliaries	-A20	71.52
1 NO SC+OL + 1 NC	-T10A01	89.14
1 NO SC+OL + 1 NO	-T10A10	89.14
Side Mount 600V max.		
2 NC Auxiliaries	-AS02	81.89
2 NO Auxiliaries	-AS20	81.89
1 NO + 1 NC Auxiliary	-AS11	81.89
Additional KT7 Trip Contacts, Side Mount 600V max.		
1 NO SC+OL+1 NO SC	-R00	97.43
1 NO SC+OL+1 NC SC	-R01	97.43
1 NC SC+OL+1 NO SC	-R10	97.43
Accessories		
Undervoltage Release Module	-UA-✱	130.60
Shunt Release Module	-AA-✱	130.60

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24V	21V	24V
28V	24V	28V
120V	**105V**	**120V**
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V
600V	550V	600V

This item is available in the ORANGE EXPRESS 3-day shipping program

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "DG" suffix to "DJ". Ex: Change KTA7-25S-0.16-DG to KTA7-25S-0.16-**DJ**.

❺ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTA7 - Type 4 / 12

Amp / Horsepower Rating											
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❹	Price	Dimension Code
Single Phase		Three Phase								
115V	230V	200V	230V	460V	575V					
KTA7-25S/32S Standard Interrupting Capacity										
~	~	~	~	~	~	0.10…0.16	2.1	KTA7-25S-0.16A-WG	666.48	W6
~	~	~	~	~	~	0.16…0.25	3.3	KTA7-25S-0.25A-WG	666.48	W6
~	~	~	~	~	1/4	0.25…0.40	5.2	KTA7-25S-0.4A-WG	666.48	W6
~	~	~	~	1/4	1/3	0.40…0.63	8.2	KTA7-25S-0.63A-WG	698.61	W6
~	~	~	~	1/2	3/4	0.63…1.0	13	KTA7-25S-1A-WG	698.61	W6
~	1/10	1/4	1/3	1	1	1.0…1.6	21	KTA7-25S-1.6A-WG	698.61	W6
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25S-2.5A-WG	698.61	W6
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25S-4A-WG	698.61	W6
1/4	3/4	1-1/2	2	5	5 ❺	4…6.3	82	KTA7-25S-6.3A-WG	698.61	W6
1/2	1-1/2	3	3	7-1/2	10 ❺	6.3…10	130	KTA7-25S-10A-WG	698.61	W6
1	3	5	5	10	15 ❺	10…16	208	KTA7-25S-16A-WG	733.85	W6
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25S-20A-WG	733.85	W6
2	3	7-1/2 ❺	7-1/2 ❺	20 ❺	20 ❺	18…25	325	KTA7-25S-25A-WG ❺	733.85	W6
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32S-29A-WG ❺	838.54	W6
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32S-32A-WG ❺	838.54	W6
KTA7-25H/32H High Interrupting Capacity										
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25H-2.5A-WG	759.77	W6
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25H-4A-WG	759.77	W6
1/4	1/2	1-1/2	2	5	5	4…6.3	82	KTA7-25H-6.3A-WG	759.77	W6
1/2	1-1/2	3	3	7-1/2	10	6.3…10	130	KTA7-25H-10A-WG	802.26	W6
1	3	5	5	10	15	10…16	208	KTA7-25H-16A-WG	802.26	W6
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25H-20A-WG	802.26	W6
2	3	7-1/2	7-1/2	20	20 ❺	18…25	325	KTA7-25H-25A-WG	802.26	W6
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32H-29A-WG ❺	938.04	W6
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32H-32A-WG ❺	938.04	W6
KTA7-45H High Interrupting Capacity										
1/2	1-1/2	3	3	7-1/2	7-1/2	6.3…10	130	KTA7-45H-10A-WG	1,072.79	R/F
1	3	5	5	10	10	10…16	208	KTA7-45H-16A-WG	1,072.79	R/F
1-1/2	3	5	7-1/2	15	15	14.5…20	260	KTA7-45H-20A-WG	1,072.79	R/F
2	3	~	10	20	20	18…25	325	KTA7-45H-25A-WG	1,072.79	R/F
3	5	7-1/2	10	25	30	23…32	416	KTA7-45H-32A-WG	1,072.79	R/F
3	7-1/2	10	15	30	40 ❺	32…45	585	KTA7-45H-45A-WG	1,133.95	R/F

Painted Steel, Type 4 / 12 Enclosure



Includes:

- Type 4 / 12 enclosure – watertight, dusttight
- KT7-25S/32S (Standard Interrupting Capacity) "Type E" Self-protected Combination Manual Controller ❺
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number	Price Adder
KT7 Auxiliaries & Trip Contacts, Front Mount 300V max.		
1 NO Auxiliary	**-A10**	**64.26**
1 NC Auxiliary	**-A01**	**64.26**
1 NO + 1 NC Auxiliary	**-A11**	**71.52**
2 NO Auxiliaries	**-A20**	**71.52**
1 NO SC+OL + 1 NC	**-T10A01**	**89.14**
1 NO SC+OL + 1 NO	**-T10A10**	**89.14**
Side Mount 600V max.		
2 NC Auxiliaries	**-AS02**	**81.89**
2 NO Auxiliaries	**-AS20**	**81.89**
1 NO + 1 NC Auxiliary	**-AS11**	**81.89**
Additional KT7 Trip Contacts, Side Mount 600V max.		
1 NO SC+OL+1 NO SC	**-R00**	**97.43**
1 NO SC+OL+1 NC SC	**-R01**	**97.43**
1 NC SC+OL+1 NO SC	**-R10**	**97.43**
Accessories		
Undervoltage Release Module	**-UA-✱**	**130.60**
Shunt Release Module	**-AA-✱**	**130.60**

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24V	21V	24V
28V	24V	28V
120V	**105V**	**120V**
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V
600V	550V	600V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change KTA7-25S-0.16-WG to KTA7-25S-0.16-**WJ**.

❺ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

KTA7 Explosion Proof Motor Controllers - NEMA Type 7/9

Includes:

- Class I, Div 1, 2, Group C, D
  Class II, Div 1, 2, Group E, F & G enclosure
  Class III
  NEMA Type 7/9
- KT7-25S/32S (Standard interrupting capacity) "Type E" Self-protected Combination Manual Motor Controller ❹
- Terminal Adaptor for Type E Applications
  (Cat.# KT7-25-TE1)

Amp / Horsepower Rating										
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number	Price	Dimension Code
Single Phase		Three Phase								
115V	230V	200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity										
~	~	~	~	~	~	0.10…0.16	2.1	**KTA7-25S-0.16A-EX**	**1,019.93**	EX
~	~	~	~	~	~	0.16…0.25	3.3	**KTA7-25S-0.25A-EX**	**1,019.93**	EX
~	~	~	~	~	1/4	0.25…0.40	5.2	**KTA7-25S-0.4A-EX**	**1,019.93**	EX
~	~	~	~	1/4	1/3	0.40…0.63	8.2	**KTA7-25S-0.63A-EX**	**1,062.43**	EX
~	~	~	~	1/2	3/4	0.63…1.0	13	**KTA7-25S-1A-EX**	**1,062.43**	EX
~	1/10	1/4	1/3	1	1	1.0…1.6	21	**KTA7-25S-1.6A-EX**	**1,062.43**	EX
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	**KTA7-25S-2.5A-EX**	**1,062.43**	EX
1/8	1/3	1	1	3	3	2.5…4	52	**KTA7-25S-4A-EX**	**1,062.43**	EX
1/4	3/4	1-1/2	2	5	**5 ❹**	4…6.3	82	**KTA7-25S-6.3A-EX**	**1,062.43**	EX
1/2	1-1/2	3	3	7-1/2	**10 ❹**	6.3…10	130	**KTA7-25S-10A-EX**	**1,062.43**	EX
1	3	5	5	10	**15 ❹**	10…16	208	**KTA7-25S-16A-EX**	**1,105.95**	EX
1-1/2	3	5	7-1/2	15	**20 ❹**	14.5…20	260	**KTA7-25S-20A-EX**	**1,105.95**	EX
2	**3**	**7-1/2 ❹**	**7-1/2❹**	**20 ❹**	**20 ❹**	18…25	325	**KTA7-25S-25A-EX**	**1,105.95**	EX
2	**5**	**7-1/2 ❹**	**10 ❹**	**20 ❹**	**25 ❹**	24…29	406	**KTA7-32S-29A-EX**	**1,210.65**	EX
3	**5**	**7-1/2 ❹**	**10 ❹**	**25 ❹**	**30 ❹**	27…32	448	**KTA7-32S-32A-EX**	**1,210.65**	EX

Modifications (Factory Assembled) ❺

KT7 Auxiliaries & Trip Contacts	Add Suffix to Cat. Number	Price Adder
Front Mount 300V max.		
1 NO Auxiliary	**-A10**	**64.26**
1 NC Auxiliary	**-A01**	**64.26**
1 NO + 1 NC Auxiliary	**-A11**	**71.52**
2 NO Auxiliaries	**-A20**	**71.52**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**	**89.14**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**	**89.14**
Side Mount 600V max.		
1 NO + 1 NC Auxiliary	**-AS11**	**81.89**
2 NO Auxiliaries	**-AS20**	**81.89**
1 NC SC+OL + 1 NO Auxiliary	**-R10**	**97.43**
1 NC SC+OL + 1 NC Auxiliary	**-R11**	**97.43**
Enclosure Modifications		
Breather/Drain	**-BD**	**151.33**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

❺ -UA✱ and -AA✱ options not possible in the -EX Enclosure.

KTA7 Explosion Proof Motor Controllers – NEMA Type 4/7/9 with Gasket

EY Enclosure shown

Amp / Horsepower Rating										
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number	Price	Dimension Code
Single Phase		Three Phase								
115V	230V	200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity										
~	~	~	~	~	~	0.10…0.16	2.1	**KTA7-25S-0.16A-EY**	**1,176.44**	EY
~	~	~	~	~	~	0.16…0.25	3.3	**KTA7-25S-0.25A-EY**	**1,176.44**	EY
~	~	~	~	~	1/4	0.25…0.40	5.2	**KTA7-25S-0.4A-EY**	**1,176.44**	EY
~	~	~	~	1/4	1/3	0.40…0.63	8.2	**KTA7-25S-0.63A-EY**	**1,210.65**	EY
~	~	~	~	1/2	3/4	0.63…1.0	13	**KTA7-25S-1A-EY**	**1,210.65**	EY
~	1/10	1/4	1/3	1	1	1.0…1.6	21	**KTA7-25S-1.6A-EY**	**1,210.65**	EY
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	**KTA7-25S-2.5A-EY**	**1,210.65**	EY
1/8	1/3	1	1	3	3	2.5…4	52	**KTA7-25S-4A-EY**	**1,210.65**	EY
1/4	3/4	1-1/2	2	5	5 ❹	4…6.3	82	**KTA7-25S-6.3A-EY**	**1,210.65**	EY
1/2	1-1/2	3	3	7-1/2	10 ❹	6.3…10	130	**KTA7-25S-10A-EY**	**1,210.65**	EY
1	3	5	5	10	15 ❹	10…16	208	**KTA7-25S-16A-EY**	**1,245.88**	EY
1-1/2	3	5	7-1/2	15	20 ❹	14.5…20	260	**KTA7-25S-20A-EY**	**1,245.88**	EY
2	3	7-1/2 ❹	7-1/2 ❹	20 ❹	20 ❹	18…25	325	**KTA7-25S-25A-EY**	**1,341.25**	EY
2	5	7-1/2 ❹	10 ❹	20 ❹	25 ❹	24…29	406	**KTA7-32S-29A-EY**	**1,351.61**	EY
3	5	7-1/2 ❹	10 ❹	25 ❹	30 ❹	27…32	448	**KTA7-32S-32A-EY**	**1,351.61**	EY
KTA7-25H High Interrupting Capacity										
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	**KTA7-25H-2.5A-EY**	**1,272.84**	EY
1/8	1/3	1	1	3	3	2.5…4	52	**KTA7-25H-4A-EY**	**1,272.84**	EY
1/4	1/2	1-1/2	2	5	5	4…6.3	82	**KTA7-25H-6.3A-EY**	**1,272.84**	EY
1/2	1-1/2	3	3	7-1/2	10	6.3…10	130	**KTA7-25H-10A-EY**	**1,316.37**	EY
1	3	5	5	10	15	10…16	208	**KTA7-25H-16A-EY**	**1,316.37**	EY
1-1/2	3	5	7-1/2	15	20 ❹	14.5…20	260	**KTA7-25H-20A-EY**	**1,316.37**	EY
2	3	7-1/2	7-1/2	20	20 ❹	18…25	325	**KTA7-25H-25A-EY**	**1,316.37**	EY
2	5	7-1/2 ❹	10 ❹	20 ❹	25 ❹	24…29	406	**KTA7-32H-29A-EY**	**1,452.15**	EY
3	5	7-1/2 ❹	10 ❹	25 ❹	30 ❹	27…32	448	**KTA7-32H-32A-EY**	**1,452.15**	EY
KTA7-45H High Interrupting Capacity										
1/2	1-1/2	3	3	7-1/2	7-1/2	6.3…10	130	**KTA7-45H-10A-EZ**	**2,141.43**	EZ
1	3	5	5	10	10	10…16	208	**KTA7-45H-16A-EZ**	**2,141.43**	EZ
1-1/2	3	5	7-1/2	15	15	14.5…20	260	**KTA7-45H-20A-EZ**	**2,141.43**	EZ
2	3	~	10	20	20	18…25	325	**KTA7-45H-25A-EZ**	**2,141.43**	EZ
3	5	7-1/2	10	25	30	23…32	416	**KTA7-45H-32A-EZ**	**2,210.89**	EZ
3	7-1/2	10	15	30	40 ❹	32…45	585	**KTA7-45H-45A-EZ**	**2,210.89**	EZ

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. See page F5 for KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote ❶ for device selection criteria.

❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Includes:

- Class I, Div 1, 2, Group C, D
  Class II, Div 1, 2, Group E, F & G enclosure
  Class III
- NEMA Type 4/7/9
- KT7 "Type E" Self-protected Combination Manual Motor Controller ❹
- Terminal Adaptor for Type E Applications
  (Cat.# KT7-25-TE1 or KT7-45-TE)

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number	Price Adder
KT7 Auxiliaries & Trip Contacts, Front Mount 300V max.		
1 NO Auxiliary	**-A10**	**64.26**
1 NC Auxiliary	**-A01**	**64.26**
1 NO + 1 NC Auxiliary	**-A11**	**71.52**
2 NO Auxiliaries	**-A20**	**71.52**
1 NO SC+OL + 1 NC	**-T10A01**	**89.14**
1 NO SC+OL + 1 NO	**-T10A10**	**89.14**
Side Mount 600V max.		
2 NC Auxiliaries	**-AS02**	**81.89**
2 NO Auxiliaries	**-AS20**	**81.89**
1 NO + 1 NC Auxiliary	**-AS11**	**81.89**
Additional KT7 Trip Contacts, Side Mount 600V max.		
1 NO SC+OL+1 NO SC	**-R00**	**97.43**
1 NO SC+OL+1 NC SC	**-R01**	**97.43**
1 NC SC+OL+1 NO SC	**-R10**	**97.43**
Accessories		
Undervoltage Release Module	**-UA-✱**	**130.60**
Shunt Release Module	**-AA-✱**	**130.60**
Enclosure Modifications		
Breather/Drain	**-BD**	**151.33**

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24V	**21V**	**24V**
28V	24V	28V
120V	**105V**	**120V**
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V

Enclosed KTU7 Circuit Breaker - Type 4 / 4X / 12

Amp / Interrupt Rating								Non-metallic, Type 4 / 4X / 12 Enclosure
❶ Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA] 240V	480Y /277V	600Y /347V	Catalog Number	Price	Dimension Code	
KTU7-D — High Interrupting Capacity – 2-Pole								
0.5	15…20xIn	100	100	50	**KTU7-D-2D-0.5-VG**	**739.04**		
1.0	15…20xIn	100	100	50	**KTU7-D-2D-1-VG**	**739.04**		
2.0	15…20xIn	100	100	50	**KTU7-D-2D-2-VG**	**739.04**		
3.0	15…20xIn	100	100	50	**KTU7-D-2D-3-VG**	**739.04**		
4.0	15…20xIn	100	100	50	**KTU7-D-2D-4-VG**	**739.04**		
5.0	15…20xIn	100	100	50	**KTU7-D-2D-5-VG**	**739.04**		
6.0	15…20xIn	100	100	50	**KTU7-D-2D-6-VG**	**739.04**	Q6 ❶	
8.0	15…20xIn	100	100	50	**KTU7-D-2D-8-VG**	**739.04**		
10.0	15…20xIn	100	100	50	**KTU7-D-2D-10-VG**	**739.04**		
12.0	15…20xIn	65	65	25	**KTU7-D-2D-12-VG**	**739.04**		
15.0	15…20xIn	65	65	25	**KTU7-D-2D-15-VG**	**739.04**		
20.0	15…20xIn	65	65	25	**KTU7-D-2D-20-VG**	**739.04**		
25.0	15…20xIn	65	65	25	**KTU7-D-2D-25-VG**	**739.04**		
30.0	15…20xIn	65	65	25	**KTU7-D-2D-30-VG**	**739.04**		
KTU7-D — High Interrupting Capacity – 3-Pole								
0.5	15…20xIn	100	100	50	**KTU7-D-3D-0.5-VG**	**835.43**		
1.0	15…20xIn	100	100	50	**KTU7-D-3D-1-VG**	**835.43**		
2.0	15…20xIn	100	100	50	**KTU7-D-3D-2-VG**	**835.43**		
3.0	15…20xIn	100	100	50	**KTU7-D-3D-3-VG**	**835.43**		
4.0	15…20xIn	100	100	50	**KTU7-D-3D-4-VG**	**835.43**		
5.0	15…20xIn	100	100	50	**KTU7-D-3D-5-VG**	**835.43**		
6.0	15…20xIn	100	100	50	**KTU7-D-3D-6-VG**	**835.43**	Q6 ❶	
8.0	15…20xIn	100	100	50	**KTU7-D-3D-8-VG**	**835.43**		
10.0	15…20xIn	100	100	50	**KTU7-D-3D-10-VG**	**835.43**		
12.0	15…20xIn	65	65	25	**KTU7-D-3D-12-VG**	**835.43**		
15.0	15…20xIn	65	65	25	**KTU7-D-3D-15-VG**	**835.43**		
20.0	15…20xIn	65	65	25	**KTU7-D-3D-20-VG**	**835.43**		
25.0	15…20xIn	65	65	25	**KTU7-D-3D-25-VG**	**835.43**		
30.0	15…20xIn	65	65	25	**KTU7-D-3D-30-VG**	**835.43**		

Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTU7 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN Series E) ❷

Modifications (Factory Assembled) ❸

KT7 Auxiliaries & Trip Contacts - Front Mount 300V max.	Add Suffix to Cat. Number	Price Adder
1 NO Auxiliary	**-A10**	**64.26**
1 NC Auxiliary	**-A01**	**64.26**
1 NO + 1 NC Auxiliary	**-A11**	**71.52**
2 NO Auxiliaries	**-A20**	**71.52**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**	**89.14**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**	**89.14**

❶ KTU7 is 80% rated in this enclosure.
❷ A red and yellow handle may be selected instead of the standard black handle. Change "VG" suffix to "VJ". Ex: Change KTU7-D-2D-0.16-VG to KTU7-D-2D-0.16-VJ.
❸ Load Terminal Cover KT7-PEFC is included with any factory modifications.

Enclosed KTU7 Circuit Breaker - Type 12

Amp / Interrupt Rating					Painted Steel, Type 12 Enclosure		
❶ Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA] 240V	480Y /277V	600Y /347V	Catalog Number	Price	Dimension Code
KTU7-D — High Interrupting Capacity – 2-Pole							
0.5	15…20xIn	100	100	50	**KTU7-D-2D-0.5-DG**	**773.24**	
1.0	15…20xIn	100	100	50	**KTU7-D-2D-1-DG**	**773.24**	
2.0	15…20xIn	100	100	50	**KTU7-D-2D-2-DG**	**773.24**	
3.0	15…20xIn	100	100	50	**KTU7-D-2D-3-DG**	**773.24**	
4.0	15…20xIn	100	100	50	**KTU7-D-2D-4-DG**	**773.24**	
5.0	15…20xIn	100	100	50	**KTU7-D-2D-5-DG**	**773.24**	
6.0	15…20xIn	100	100	50	**KTU7-D-2D-6-DG**	**773.24**	L ❶
8.0	15…20xIn	100	100	50	**KTU7-D-2D-8-DG**	**773.24**	
10.0	15…20xIn	100	100	50	**KTU7-D-2D-10-DG**	**773.24**	
12.0	15…20xIn	65	65	25	**KTU7-D-2D-12-DG**	**773.24**	
15.0	15…20xIn	65	65	25	**KTU7-D-2D-15-DG**	**773.24**	
20.0	15…20xIn	65	65	25	**KTU7-D-2D-20-DG**	**773.24**	
25.0	15…20xIn	65	65	25	**KTU7-D-2D-25-DG**	**773.24**	
30.0	15…20xIn	65	65	25	**KTU7-D-2D-30-DG**	**773.24**	
KTU7-D — High Interrupting Capacity – 3-Pole							
0.5	15…20xIn	100	100	50	**KTU7-D-3D-0.5-DG**	**868.60**	
1.0	15…20xIn	100	100	50	**KTU7-D-3D-1-DG**	**868.60**	
2.0	15…20xIn	100	100	50	**KTU7-D-3D-2-DG**	**868.60**	
3.0	15…20xIn	100	100	50	**KTU7-D-3D-3-DG**	**868.60**	
4.0	15…20xIn	100	100	50	**KTU7-D-3D-4-DG**	**868.60**	
5.0	15…20xIn	100	100	50	**KTU7-D-3D-5-DG**	**868.60**	
6.0	15…20xIn	100	100	50	**KTU7-D-3D-6-DG**	**868.60**	L ❶
8.0	15…20xIn	100	100	50	**KTU7-D-3D-8-DG**	**868.60**	
10.0	15…20xIn	100	100	50	**KTU7-D-3D-10-DG**	**868.60**	
12.0	15…20xIn	65	65	25	**KTU7-D-3D-12-DG**	**868.60**	
15.0	15…20xIn	65	65	25	**KTU7-D-3D-15-DG**	**868.60**	
20.0	15…20xIn	65	65	25	**KTU7-D-3D-20-DG**	**868.60**	
25.0	15…20xIn	65	65	25	**KTU7-D-3D-25-DG**	**868.60**	
30.0	15…20xIn	65	65	25	**KTU7-D-3D-30-DG**	**868.60**	

Includes:

- Type 12 enclosure – dusttight
- KTU7 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN Series E) ❷

Modifications (Factory Assembled) ❸

KT7 Auxiliaries & Trip Contacts - Front Mount 300V max.	Add Suffix to Cat. Number	Price Adder
1 NO Auxiliary	**-A10**	**64.26**
1 NC Auxiliary	**-A01**	**64.26**
1 NO + 1 NC Auxiliary	**-A11**	**71.52**
2 NO Auxiliaries	**-A20**	**71.52**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**	**89.14**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**	**89.14**

❶ KTU7 is 80% rated in this enclosure.
❷ A red and yellow handle may be selected instead of the standard black handle. Change "DG" suffix to "DJ". Ex: Change KTU7-D-2D-0.16-**DG** to KTU7-D-2D-0.16-**DJ**.
❸ Load Terminal Cover KT7-PEFC is included with any factory modifications.

Enclosed KTU7 Circuit Breaker - Type 4 / 12

Amp / Interrupt Rating					Painted Steel, Type 4 / 12 Enclosure		
❶ Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA] 240V	480Y /277V	600Y /347V	Catalog Number	Price	Dimension Code
KTU7-D — High Interrupting Capacity – 2-Pole							
0.5	15…20xIn	100	100	50	**KTU7-D-2D-0.5-WG**	**835.43**	
1.0	15…20xIn	100	100	50	**KTU7-D-2D-1-WG**	**835.43**	
2.0	15…20xIn	100	100	50	**KTU7-D-2D-2-WG**	**835.43**	
3.0	15…20xIn	100	100	50	**KTU7-D-2D-3-WG**	**835.43**	
4.0	15…20xIn	100	100	50	**KTU7-D-2D-4-WG**	**835.43**	
5.0	15…20xIn	100	100	50	**KTU7-D-2D-5-WG**	**835.43**	
6.0	15…20xIn	100	100	50	**KTU7-D-2D-6-WG**	**835.43**	**W6** ❶
8.0	15…20xIn	100	100	50	**KTU7-D-2D-8-WG**	**835.43**	
10.0	15…20xIn	100	100	50	**KTU7-D-2D-10-WG**	**835.43**	
12.0	15…20xIn	65	65	25	**KTU7-D-2D-12-WG**	**835.43**	
15.0	15…20xIn	65	65	25	**KTU7-D-2D-15-WG**	**835.43**	
20.0	15…20xIn	65	65	25	**KTU7-D-2D-20-WG**	**835.43**	
25.0	15…20xIn	65	65	25	**KTU7-D-2D-25-WG**	**835.43**	
30.0	15…20xIn	65	65	25	**KTU7-D-2D-30-WG**	**835.43**	
KTU7-D — High Interrupting Capacity – 3-Pole							
0.5	15…20xIn	100	100	50	**KTU7-D-3D-0.5-WG**	**930.79**	
1.0	15…20xIn	100	100	50	**KTU7-D-3D-1-WG**	**930.79**	
2.0	15…20xIn	100	100	50	**KTU7-D-3D-2-WG**	**930.79**	
3.0	15…20xIn	100	100	50	**KTU7-D-3D-3-WG**	**930.79**	
4.0	15…20xIn	100	100	50	**KTU7-D-3D-4-WG**	**930.79**	
5.0	15…20xIn	100	100	50	**KTU7-D-3D-5-WG**	**930.79**	
6.0	15…20xIn	100	100	50	**KTU7-D-3D-6-WG**	**930.79**	**W6** ❶
8.0	15…20xIn	100	100	50	**KTU7-D-3D-8-WG**	**930.79**	
10.0	15…20xIn	100	100	50	**KTU7-D-3D-10-WG**	**930.79**	
12.0	15…20xIn	65	65	25	**KTU7-D-3D-12-WG**	**930.79**	
15.0	15…20xIn	65	65	25	**KTU7-D-3D-15-WG**	**930.79**	
20.0	15…20xIn	65	65	25	**KTU7-D-3D-20-WG**	**930.79**	
25.0	15…20xIn	65	65	25	**KTU7-D-3D-25-WG**	**930.79**	
30.0	15…20xIn	65	65	25	**KTU7-D-3D-30-WG**	**930.79**	

Includes:

- Type 4/12 enclosure – watertight, dusttight
- KTU7 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN Series E) ❷

Modifications (Factory Assembled) ❸

KT7 Auxiliaries & Trip Contacts - Front Mount 300V max.	Add Suffix to Cat. Number	Price Adder
1 NO Auxiliary	**-A10**	**64.26**
1 NC Auxiliary	**-A01**	**64.26**
1 NO + 1 NC Auxiliary	**-A11**	**71.52**
2 NO Auxiliaries	**-A20**	**71.52**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**	**89.14**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**	**89.14**

❶ KTU7 up to 15 Amp is 100% rated in this enclosure. KTU7 20…30 Amp is 80% rated.
❷ A red and yellow handle may be selected instead of the standard black handle. Change "WG" suffix to "WJ". Ex: Change KTU7-D-2D-0.16-**WG** to KTU7-D-2D-0.16-**WJ**.
❸ Load Terminal Cover KT7-PEFC is included with any factory modifications.

Enclosed Non-Reversing Combination Controller, AC Operation - Type 1/12K/IP66 ❻❼

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)		
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❺	Catalog Number ❹❻❽❾	Price	Dimension Code
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	1	**CX7-9-10-✱-AS0.16A-A10-PG▼**	**525.51**	Q4
~	~	~	~	0.16…0.25	3.3	2	**CX7-9-10-✱-AS0.25A-A10-PG▼**	**525.51**	Q4
~	~	~	~	0.25…0.40	5.2	3	**CX7-9-10-✱-AS0.4A-A10-PG▼**	**525.51**	Q4
~	~	~	~	0.40…0.63	8.2	4	**CX7-9-10-✱-AS0.63A-A10-PG▼**	**551.42**	Q4
~	~	1/2	3/4	0.63…1.0	13	5	**CX7-9-10-✱-AS1A-A10-PG▼**	**551.42**	Q4
~	~	1	1	1.0…1.6	21	6	**CX7-9-10-✱-AS1.6A-A10-PG▼**	**551.42**	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	**CX7-9-10-✱-AS2.5A-A10-PG▼**	**551.42**	Q4
1	1	3	3	2.5…4	52	8	**CX7-9-10-✱-AS4A-A10-PG▼**	**551.42**	Q4
1-1/2	2	5	~	4…6.3	82	9	**CX7-9-10-✱-AS6.3A-A10-PG▼**	**551.42**	Q4
3	3	7-1/2	~	6.3…10	130	11	**CX7-12-10-✱-AS10A-A10-PG▼**	**591.85**	Q4
5	5	10	~	10…16	208	12	**CX7-16-10-✱-AS16A-A10-PG▼**	**603.25**	Q4
5	7-1/2	15	~	14.5…20	260	15	**CX7-23-10-✱-AS20A-A10-PG▼**	**663.37**	Q4
KTA7-25H High Interrupting Capacity									
1/2	3/4	1-1/2	2	1.6…2.5	33	17	**CX7-9-10-✱-AH2.5A-A10-PG▼**	**609.47**	Q4
1	1	3	3	2.5…4	52	19	**CX7-9-10-✱-AH4A-A10-PG▼**	**609.47**	Q4
1-1/2	2	5	5	4…6.3	82	22	**CX7-9-10-✱-AH6.3A-A10-PG▼**	**609.47**	Q4
3	3	7-1/2	10	6.3…10	130	24	**CX7-12-10-✱-AH10A-A10-PG▼**	**665.44**	Q4
5	5	10	15	10…16	208	28	**CX7-16-10-✱-AH16A-A10-PG▼**	**695.50**	Q4
5	7-1/2	15	~	14.5…20	260	31	**CX7-23-10-✱-AH20A-A10-PG▼**	**720.38**	Q4
5	7-1/2	15	~	18…25	325	33	**CX7-23-10-✱-AH25A-A10-PG▼**	**720.38**	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code.
See page F103 for factory installed modifications

Contactor AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	**24V**	24V
120	110V	120V
220W	**200V-220V**	**208V-240V**
240	220V	240V
480 ❾	440V	480V
600 ❾	550V	600V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. Contact factory for these specifications.

❹ Other voltages available, see Section A in this catalog.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F118 for wiring diagram and F119 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-✱-AS0.16A-A10-**PG**▼ to CX7-9-10-✱-AS0.16A-A10-**PJ**▼.

❾ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Non-Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ❹❻❼

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)		
Max. Horsepower ❶❷❸				O/L Relay Ampere Range	Magnetic Response Current	Index ❺	Catalog Number ❹❻❽	Price	Dimension Code
Three Phase									
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	1	**CX7-9E-10-✱-AS0.16A-A10-PG▼**	**573.20**	Q4
~	~	~	~	0.16…0.25	3.3	2	**CX7-9E-10-✱-AS0.25A-A10-PG▼**	**573.20**	Q4
~	~	~	~	0.25…0.40	5.2	3	**CX7-9E-10-✱-AS0.4A-A10-PG▼**	**599.11**	Q4
~	~	~	~	0.40…0.63	8.2	4	**CX7-9E-10-✱-AS0.63A-A10-PG▼**	**599.11**	Q4
~	~	1/2	3/4	0.63…1.0	13	5	**CX7-9E-10-✱-AS1A-A10-PG▼**	**599.11**	Q4
~	~	1	1	1.0…1.6	21	6	**CX7-9E-10-✱-AS1.6A-A10-PG▼**	**599.11**	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	**CX7-9E-10-✱-AS2.5A-A10-PG▼**	**599.11**	Q4
1	1	3	3	2.5…4	52	8	**CX7-9E-10-✱-AS4A-A10-PG▼**	**599.11**	Q4
1-1/2	2	5	~	4…6.3	82	9	**CX7-9E-10-✱-AS6.3A-A10-PG▼**	**599.11**	Q4
3	3	7-1/2	~	6.3…10	130	11	**CX7-12E-10-✱-AS10A-A10-PG▼**	**639.52**	Q4
5	5	10	~	10…16	208	12	**CX7-16E-10-✱-AS16A-A10-PG▼**	**650.93**	Q4
5	7-1/2	15	~	14.5…20	260	15	**CX7-23E-10-✱-AS20A-A10-PG▼**	**711.05**	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	17	**CX7-9E-10-✱-AH2.5A-A10-PG▼**	**657.15**	Q4
1	1	3	3	2.5…4	52	19	**CX7-9E-10-✱-AH4A-A10-PG▼**	**657.15**	Q4
1/1/2	2	5	5	4…6.3	82	22	**CX7-9E-10-✱-AH6.3A-A10-PG▼**	**657.15**	Q4
3	3	7-1/2	10	6.3…10	130	24	**CX7-12E-10-✱-AH10A-A10-PG▼**	**711.05**	Q4
5	5	10	15	10…16	208	28	**CX7-16E-10-✱-AH16A-A10-PG▼**	**743.18**	Q4
5	7-1/2	15	~	14.5…20	260	31	**CX7-23E-10-✱-AH20A-A10-PG▼**	**768.05**	Q4
5	7-1/2	15	~	18…25	325	33	**CX7-23E-10-✱-AH25A-A10-PG▼**	**768.05**	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactors (for remote operation), with Electronic DC Coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB) + KT7-KN1 ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code.
See page F103 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❹

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. Contact factory for these specifications.

❹ CX7-9E…23E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F118 for wiring diagram and F119 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-✱-AS0.16A-A10-**PG**▼ to CX7-9-10-✱-AS0.16A-A10-**PJ**▼.

Enclosed Non-Reversing Combination Controller with E-Stop, AC Operation - Type 1/12K/IP66 ❶❼❽

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)		
Max. Horsepower ❷❸❹ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❻	Catalog Number ❺❼❾❿	Price	Dimension Code
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	1	**CX7-9-10-✱-AS0.16A-A10-PG4U-9**	**615.69**	Q4
~	~	~	~	0.16…0.25	3.3	2	**CX7-9-10-✱-AS0.25A-A10-PG4U-9**	**615.69**	Q4
~	~	~	~	0.25…0.40	5.2	3	**CX7-9-10-✱-AS0.4A-A10-PG4U-9**	**615.69**	Q4
~	~	~	~	0.40…0.63	8.2	4	**CX7-9-10-✱-AS0.63A-A10-PG4U-9**	**615.69**	Q4
~	~	1/2	3/4	0.63…1.0	13	5	**CX7-9-10-✱-AS1A-A10-PG4U-9**	**615.69**	Q4
~	~	1	1	1.0…1.6	21	6	**CX7-9-10-✱-AS1.6A-A10-PG4U-9**	**615.69**	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	**CX7-9-10-✱-AS2.5A-A10-PG4U-9**	**615.69**	Q4
1	1	3	3	2.5…4	52	8	**CX7-9-10-✱-AS4A-A10-PG4U-9**	**615.69**	Q4
1-1/2	2	5	~	4…6.3	82	9	**CX7-9-10-✱-AS6.3A-A10-PG4U-9**	**615.69**	Q4
3	3	7-1/2	~	6.3…10	130	11	**CX7-12-10-✱-AS10A-A10-PG4U-9**	**680.98**	Q4
5	5	10	~	10…16	208	12	**CX7-16-10-✱-AS16A-A10-PG4U-9**	**692.39**	Q4
5	7-1/2	15	~	14.5…20	260	15	**CX7-23-10-✱-AS20A-A10-PG4U-9**	**752.51**	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	17	**CX7-9-10-✱-AH2.5A-A10-PG4U-9**	**699.65**	Q4
1	1	3	3	2.5…4	52	19	**CX7-9-10-✱-AH4A-A10-PG4U-9**	**699.65**	Q4
1/1/2	2	5	5	4…6.3	82	22	**CX7-9-10-✱-AH6.3A-A10-PG4U-9**	**699.65**	Q4
3	3	7-1/2	10	6.3…10	130	24	**CX7-12-10-✱-AH10A-A10-PG4U-9**	**757.69**	Q4
5	5	10	15	10…16	208	28	**CX7-16-10-✱-AH16A-A10-PG4U-9**	**785.68**	Q4
5	7-1/2	15	~	14.5…20	260	31	**CX7-23-10-✱-AH20A-A10-PG4U-9**	**810.55**	Q4
5	7-1/2	15	~	18…25	325	33	**CX7-23-10-✱-AH25A-A10-PG4U-9**	**810.55**	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R) ❶
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactor (for remote operation), AC coil
- Multifunction 2-position Push Button and Emergency Stop ❼
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ❾
- Power wiring

This is a factory assembly.

Optional factory modifications are not available on this device.

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	24V	24V
120	110V	120V
220W	200V-220V	208V-240V
240	220V	240V
480 ❿	440V	480V
600 ❿	550V	600V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ This is a factory assembly. The KS7-C0C4R does not include knock-outs for field assembly of this starter.

❷ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❸ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❹ CX7 may be applied to single phase loads. Contact factory for these specifications.

❺ Other voltages available, see Section A in this catalog.

❻ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❼ Uses D7P-U2EFFEPX11 Two-Position Multifunction push button with legend I/O and D7P-MT44PX01 Emergency Stop Push Button.

❽ CPT not possible with KS7-C0C4R. Refer page F119 for dimensional information.

❾ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: CX7-9-10-✱-AS0.16A-A10-**PG**4U-9 becomes CX7-9-10-✱-AS0.16A-A10-**PJ**4U-9.

❿ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, AC Operation - Type 1/12K/IP66 ❺❼

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)		
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❺	Catalog Number ❹❻❽❾	Price	Dimension Code
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	1	**CXU7-9-22-✱-AS0.16A-A10-PG▼**	**814.70**	Q4
~	~	~	~	0.16…0.25	3.3	2	**CXU7-9-22-✱-AS0.25A-A10-PG▼**	**814.70**	Q4
~	~	~	~	0.25…0.40	5.2	3	**CXU7-9-22-✱-AS0.4A-A10-PG▼**	**814.70**	Q4
~	~	~	~	0.40…0.63	8.2	4	**CXU7-9-22-✱-AS0.63A-A10-PG▼**	**840.61**	Q4
~	~	1/2	3/4	0.63…1.0	13	5	**CXU7-9-22-✱-AS1A-A10-PG▼**	**840.61**	Q4
~	~	1	1	1.0…1.6	21	6	**CXU7-9-22-✱-AS1.6A-A10-PG▼**	**840.61**	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	**CXU7-9-22-✱-AS2.5A-A10-PG▼**	**840.61**	Q4
1	1	3	3	2.5…4	52	8	**CXU7-9-22-✱-AS4A-A10-PG▼**	**840.61**	Q4
1-1/2	2	5	~	4…6.3	82	9	**CXU7-9-22-✱-AS6.3A-A10-PG▼**	**840.61**	Q4
3	3	7-1/2	~	6.3…10	130	11	**CXU7-12-22-✱-AS10A-A10-PG▼**	**912.13**	Q4
5	5	10	~	10…16	208	12	**CXU7-16-22-✱-AS16A-A10-PG▼**	**948.41**	Q4
5	7-1/2	15	~	14.5…20	260	15	**CXU7-23-22-✱-AS20A-A10-PG▼**	**973.29**	Q4
KTA7-25H High Interrupting Capacity									
1/2	3/4	1-1/2	2	1.6…2.5	33	17	**CXU7-9-22-✱-AH2.5A-A10-PG▼**	**898.65**	Q4
1	1	3	3	2.5…4	52	19	**CXU7-9-22-✱-AH4A-A10-PG▼**	**898.65**	Q4
1/1/2	2	5	5	4…6.3	82	22	**CXU7-9-22-✱-AH6.3A-A10-PG▼**	**898.65**	Q4
3	3	7-1/2	10	6.3…10	130	24	**CXU7-12-22-✱-AH10A-A10-PG▼**	**985.72**	Q4
5	5	10	15	10…16	208	28	**CXU7-16-22-✱-AH16A-A10-PG▼**	**1,015.78**	Q4
5	7-1/2	15	~	14.5…20	260	31	**CXU7-23-22-✱-AH20A-A10-PG▼**	**1,040.66**	Q4
5	7-1/2	15	~	18…25	325	33	**CXU7-23-22-✱-AH25A-A10-PG▼**	**1,040.66**	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code.
See page F103 for factory installed modifications

Contactor AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	110V	120V
220W	200V-220V	208V-240V
240	220V	240V
480 ❾	440V	480V
600 ❾	550V	600V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for specifications.

❹ Other voltages available, see Section A in this catalog.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F118 for wiring diagram and F119 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-✱-AS0.16A-A10-**PG**▼ to CXU7-9-10-✱-AS0.16A-A10-**PJ**▼.

❾ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ❹❻❼

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)		
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❺	Catalog Number ❹❻❽	Price	Dimension Code
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	1	CXU7-9E-22-✱-AS0.16A-A10-PG▼	910.06	Q4
~	~	~	~	0.16…0.25	3.3	2	CXU7-9E-22-✱-AS0.25A-A10-PG▼	910.06	Q4
~	~	~	~	0.25…0.40	5.2	3	CXU7-9E-22-✱-AS0.4A-A10-PG▼	935.97	Q4
~	~	~	~	0.40…0.63	8.2	4	CXU7-9E-22-✱-AS0.63A-A10-PG▼	935.97	Q4
~	~	1/2	3/4	0.63…1.0	13	5	CXU7-9E-22-✱-AS1A-A10-PG▼	935.97	Q4
~	~	1	1	1.0…1.6	21	6	CXU7-9E-22-✱-AS1.6A-A10-PG▼	935.97	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CXU7-9E-22-✱-AS2.5A-A10-PG▼	935.97	Q4
1	1	3	3	2.5…4	52	8	CXU7-9E-22-✱-AS4A-A10-PG▼	935.97	Q4
1-1/2	2	5	~	4…6.3	82	9	CXU7-9E-22-✱-AS6.3A-A10-PG▼	935.97	Q4
3	3	7-1/2	~	6.3…10	130	11	CXU7-12E-22-✱-AS10A-A10-PG▼	1,007.49	Q4
5	5	10	~	10…16	208	12	CXU7-16E-22-✱-AS16A-A10-PG▼	1,043.76	Q4
5	7-1/2	15	~	14.5…20	260	15	CXU7-23E-22-✱-AS20A-A10-PG▼	1,068.64	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CXU7-9E-22-✱-AH2.5A-A10-PG▼	994.02	Q4
1	1	3	3	2.5…4	52	19	CXU7-9E-22-✱-AH4A-A10-PG▼	994.02	Q4
1/1/2	2	5	5	4…6.3	82	22	CXU7-9E-22-✱-AH6.3A-A10-PG▼	994.02	Q4
3	3	7-1/2	10	6.3…10	130	24	CXU7-12E-22-✱-AH10A-A10-PG▼	1,081.09	Q4
5	5	10	15	10…16	208	28	CXU7-16E-22-✱-AH16A-A10-PG▼	1,112.18	Q4
5	7-1/2	15	~	14.5…20	260	31	CXU7-23E-22-✱-AH20A-A10-PG▼	1,136.02	Q4
5	7-1/2	15	~	18…25	325	33	CXU7-23E-22-✱-AH25A-A10-PG▼	1,136.02	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactors (for remote operation), with Electronic DC coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code.
See page F103 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❹

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for these specifications.

❹ CXU7-9E…23E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Blanks are not available. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F118 for wiring diagram and F119 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-✱-AS0.16A-A10-**PG**▼ to CXU7-9-10-✱-AS0.16A-A10-**PJ**▼.

CX7 Non-Reversing Controller Modifications

Pilot Device Options - required Select one option only ❶❷❸	Replace ▼ in catalog number with	Price Adder
START-STOP Multi-function	**3U**	**Standard**
I-O Multi-function	**4U**	**Standard**
OFF-ON 2-Position Selector switch	**6**	**Standard**
HAND-OFF-AUTO 3-Position Selector switch	**7**	**Standard**
Run Pilot Light Green	**1G**	**Standard**
Run Pilot Light Red	**1R**	**Standard**
Overload Alarm Pilot Light	**1Y**	**Standard**
D7-N8 22mm Hole Plug	**0**	**Standard**
Additional KT7 Auxiliaries & Trip Contacts		
Front Mount 300V maximum		
1 NO + 1 NC Auxiliary	**-A11**	**64.26**
2 NO Auxiliaries	**-A20**	**64.26**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**	**81.89**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**	**81.89**

CXU7 Reversing Controller Modifications

Pilot Device Options - required Select one option only ❶❷❸	Replace ▼ in catalog number with	Price Adder
FOR-STOP-REV Multi-function	**3U**	**Standard**
UP-STOP-DOWN Multi-function	**4U**	**Standard**
OPEN-STOP-CLOSE Multi-function	**5U**	**Standard**
FOR-STOP-REV 3-Position Selector switch	**6**	**Standard**
UP-OFF-DOWN 3-Position Selector switch	**7**	**Standard**
OPEN-OFF-CLOSE 3-Position Selector switch	**8**	**Standard**
Overload Alarm Pilot Light	**1Y**	**Standard**
D7-N8 22mm Hole Plug	**0**	**Standard**
Additional KT7 Auxiliaries & Trip Contacts		
Front Mount 300V maximum		
1 NO + 1 NC Auxiliary	**-A11**	**64.26**
2 NO Auxiliaries	**-A20**	**64.26**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**	**81.89**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**	**81.89**

CX7 Non-Reversing Controller Additions

Addition	Add to end of catalog number	Price Adder
CA7 Contactor Accessories		
Electronic Interface ❹	**-JE**	**97.43**
Surge Suppressor RC	**-R**	**55.97**
Surge Suppressor Varistor	**-V**	**41.46**
CA7 Auxiliary Contacts ❺❻		
1 NO Auxiliary	**-S10**	**46.64**
1 NC Auxiliary	**-S01**	**46.64**
1 NO + 1 NC Auxiliary	**-S11**	**59.08**
2 NO Auxiliaries	**-S20**	**59.08**
2 NC Auxiliaries	**-S02**	**59.08**
Alternate Aux. Contact Arrangement (CA7 only)		
1 NC in lieu of standard 1 NO	**-SX10**	**17.62**
2 NC in lieu of standard 2 NO (on CXU7 only)	**-SX2**	**17.62**
Unwired Terminal Blocks Specify quantity (▼)	**-▼TB**	**22.80**

CXU7 Reversing Controller Additions

Addition	Add to end of catalog number	Price Adder
CA7 Contactor Accessories		
Electronic Interface ❹	**-JE**	**97.43**
Surge Suppressor RC	**-R**	**55.97**
Surge Suppressor Varistor	**-V**	**41.46**

❶ KS7-C0C4R only has (1) 22mm hole to accomodate (1) pilot device.
❷ Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X.
See Section H in this catalog for description (all suffix's ending in "U").
❸ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 380 VAC...575VAC require a control circuit transformer.
❹ CRI7E-24 will be used. CRI7E-12 by special order only.
❺ See page A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.
❻ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications. Multiply price adder by two (2).

CX7 KWIKstarter Enclosures for use with KTA7 Type E Motor Controllers and CA7 Contactors ❶❸

Component	Description	For Use With		Environmental Approvals	Catalog Number	Price
		Type E Control-ler	Contactor			
	Enclosure for Combo KWIKstarter ❶ CX7/CXU7-9…23 CX7/CXU7-9E…23E	KTA7-25S KTA7-25H	CA7-9...23 CA7-9E…23E CAU7-9…23 CAU7-9E…23E	cUL Type 1/12K IEC IP66	**KS7-C0C4R**	**104.69**

Handle Accessory for CX7/CXU7 KWIKstarters ❶

Accessory	Description	For Use With	Color	Catalog Number	Price
	Door Coupling Handle ❶ • Padlockable • NEMA Type 1/12K and IP66 • Includes handle coupling (shaft) • Requires KT7-KN1 Locking Knob	All KT7s	Gray/Black	**KT7-SHB**	**18.66**
			Red/Yellow	**KT7-SHBY**	**18.66**
	Lockable Twist Knob • for use with KT7-SHB	All KT7s	Gray/Black	**KT7-KN1**	**9.02**
	Universal Connector for CX7/CXU7 • Provides electrical interconnection of KTA7 and CA7 (with AC or Electronic DC coil) • Applies to FVNR and FVR versions • Allows for mounting the CA7 on a single DIN rail	All KT7s	Black	**KT7-25S-PEC23A ❹**	**36.28**

CX7 KWIKstarter Pilot Device Kits (for use with KS7-C0C4R Type 1/12K) ❶❷

Kits	Description	Contact Blocks included		Catalog Number	
		NO	NC		
	Multi-Function Pushbutton kit Non-illuminated **START-STOP** **I-O**	1	1	**KS7-P3U** **KS7-P4U**	
	FOR-STOP-REV **UP-STOP-DOWN** **OPEN-STOP-CLOSE**	2	1	**KS7-P3U-REV** **KS7-P4U-REV** **KS7-P5U-REV**	
	Selector switch kits Non-illuminated, includes legend plate **ON-OFF** 2-Position	1	0	**KS7-P6**	**See page C29 for**
	HAND-OFF-AUTO 3-Position	2	0	**KS7-P7**	
	FOR-OFF-REV 3-Position **UP-OFF-DOWN** 3-Position **OPEN-OFF-CLOSE** 3-Position	2	0	**KS7-P6-REV** **KS7-P7-REV** **KS7-P8-REV**	
	Run Pilot Light or **Overload Alarm Pilot Light** Plastic operator with diffuser lens in Red, Green or Yellow, with integrated LED power module	Replace ✪ with color choice **R** = Red **G** = Green **Y** = Yellow		**KS7-P1✪24V ❺** **KS7-P1✪120V** **KS7-P1✪240V**	
	Hole Plug used to plug 22.5mm holes.	Gray Plastic		**D7-N8**	**See page H72**

❶ KS7-C0C4R is supplied with the following holes:
- (1) one 22mm hole for a Pilot Device option, select one kit from this page.
- (1) one 22mm hole for KT7-SHB (or SHRY) Disconnect or Reset handle.

❷ Plastic bezel is standard. Pilot Device Kits include D7-BX_ Base Mounted contact blocks. See Section H for more information.

❸ CPT not possible.

❹ Standard KT7-25S-PEC23 does not work in CX7/CXU7 Kwikstarters.

❺ KS7-P1✪24V can be used with 24VAC or 24VDC.

Enclosed Non-Reversing Combination Controller, AC Operation - Type 4 / 12

Amp / Horsepower Rating							Painted Steel, Type 4 / 12 Enclosure		
Max. Horsepower ❶❷❸				O/L Relay Ampere Range	Magnetic Response Current	Index ❻	Catalog Number ❹❼	Price	Dimension Code
Three Phase									
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	1	CX7-9-10-✱-AS0.16A-A10-WG	875.85	W6
~	~	~	~	0.16…0.25	3.3	2	CX7-9-10-✱-AS0.25A-A10-WG	875.85	W6
~	~	~	~	0.25…0.40	5.2	3	CX7-9-10-✱-AS0.4A-A10-WG	875.85	W6
~	~	~	~	0.40…0.63	8.2	4	CX7-9-10-✱-AS0.63A-A10-WG	909.02	W6
~	~	1/2	3/4	0.63…1.0	13	5	CX7-9-10-✱-AS1A-A10-WG	909.02	W6
~	~	1	1	1.0…1.6	21	6	CX7-9-10-✱-AS1.6A-A10-WG	909.02	W6
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CX7-9-10-✱-AS2.5A-A10-WG	909.02	W6
1	1	3	3	2.5…4	52	8	CX7-9-10-✱-AS4A-A10-WG	909.02	W6
1-1/2	2	5	~	4…6.3	82	9	CX7-9-10-✱-AS6.3A-A10-WG	909.02	W6
3	3	7-1/2	~	6.3…10	130	11	CX7-12-10-✱-AS10A-A10-WG	943.23	W6
5	5	10	~	10…16	208	12	CX7-16-10-✱-AS16A-A10-WG	996.09	W6
5	7-1/2	15	~	14.5…20	260	15	CX7-23-10-✱-AS20A-A10-WG	1,015.78	W6
KTA7-25H High Interrupting Capacity									
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CX7-9-10-✱-AH2.5A-A10-WG	968.10	W6
1	1	3	3	2.5…4	52	19	CX7-9-10-✱-AH4A-A10-WG	968.10	W6
1/1/2	2	5	5	4…6.3	82	22	CX7-9-10-✱-AH6.3A-A10-WG	968.10	W6
3	3	7-1/2	10	6.3…10	130	24	CX7-12-10-✱-AH10A-A10-WG	1,044.81	W6
5	5	10	15	10…16	208	28	CX7-16-10-✱-AH16A-A10-WG	1,064.49	W6
5	7-1/2	15	~	14.5…20	260	31	CX7-23-10-✱-AH20A-A10-WG	1,085.22	W6
5	7-1/2	15	~	18…25	325	33	CX7-23-10-✱-AH25A-A10-WG	1,085.22	W6
KTA7-45H High Interrupting Capacity									
3	3	7-1/2	10	6.3…10	130	36	CX7-30-10-✱-AH10A-A10-WG	1,328.80	W7
5	5	10	15	10…16	208	37	CX7-30-10-✱-AH16A-A10-WG	1,328.80	W7
5	7-1/2	15	20	14.5…20	260	38	CX7-30-10-✱-AH20A-A10-WG	1,328.80	W7
7-1/2	10	20	20	18…25	325	39	CX7-30-10-✱-AH25A-A10-WG	1,328.80	W7
7-1/2	10	20	25	23...32	416	41	CX7-30-10-✱-AH32A-A10-WG	1,413.80	W7
10	10	25	~	32…45	585	45	CX7-37-10-✱-AH45A-A10-WG	1,429.35	W7
10	15	30	~	32…45	585	46	CX7-43-10-✱-AH45A-A10-WG	1,889.57	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹
- Pilot device shown is factory installed option

See page F109 for factory installed modifications

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
208	~	208V
220W	**200V-220V**	**208V-240V**
240	220V	240V
277	240V	277V
380 ❼	380V-400V	440V
480 ❼	**440V**	**480V**
600 ❼	550v	600V

This item is available in the ORANGE EXPRESS 3-day shipping program

❶ **Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.**
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CX7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change **CX7**-9-10-✱-0.16A-A10-WG to **CBX7**-9-10-✱-0.16A-A10-WJ.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9-10-✱-0.16A-A10-**WG** to CX7-9-10-✱-0.16A-A10-**WJ**.

❺ Other voltages available, see Section A in this catalog.

❻ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❼ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Non-Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

Amp / Horsepower Rating							Painted Steel, Type 4 / 12 Enclosure		
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❼	Catalog Number ❹	Price	Dimension Code
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	1	**CX7-9E-10-✱-AS0.16A-A10-WG**	**1,099.74**	W6
~	~	~	~	0.16…0.25	3.3	2	**CX7-9E-10-✱-AS0.25A-A10-WG**	**1,099.74**	W6
~	~	~	~	0.25…0.40	5.2	3	**CX7-9E-10-✱-AS0.4A-A10-WG**	**1,099.74**	W6
~	~	~	~	0.40…0.63	8.2	4	**CX7-9E-10-✱-AS0.63A-A10-WG**	**1,131.87**	W6
~	~	1/2	3/4	0.63…1.0	13	5	**CX7-9E-10-✱-AS1A-A10-WG**	**1,131.87**	W6
~	~	1	1	1.0…1.6	21	6	**CX7-9E-10-✱-AS1.6A-A10-WG**	**1,131.87**	W6
1/2	3/4	1-1/2	2	1.6…2.5	33	7	**CX7-9E-10-✱-AS2.5A-A10-WG**	**1,131.87**	W6
1	1	3	3	2.5…4	52	8	**CX7-9E-10-✱-AS4A-A10-WG**	**1,131.87**	W6
1-1/2	2	5	~	4…6.3	82	9	**CX7-9E-10-✱-AS6.3A-A10-WG**	**1,131.87**	W6
3	3	7-1/2	~	6.3…10	130	11	**CX7-12E-10-✱-AS10A-A10-WG**	**1,197.17**	W6
5	5	10	~	10…16	208	12	**CX7-16E-10-✱-AS16A-A10-WG**	**1,271.80**	W6
5	7-1/2	15	~	14.5…20	260	15	**CX7-23E-10-✱-AS20A-A10-WG**	**1,314.30**	W6
KTA7-25H High Interrupting Capacity									
1/2	3/4	1-1/2	2	1.6…2.5	33	17	**CX7-9E-10-✱-AH2.5A-A10-WG**	**1,191.99**	W6
1	1	3	3	2.5…4	52	19	**CX7-9E-10-✱-AH4A-A10-WG**	**1,191.99**	W6
1/1/2	2	5	5	4…6.3	82	22	**CX7-9E-10-✱-AH6.3A-A10-WG**	**1,191.99**	W6
3	3	7-1/2	10	6.3…10	130	24	**CX7-12E-10-✱-AH10A-A10-WG**	**1,296.67**	W6
5	5	10	15	10…16	208	28	**CX7-16E-10-✱-AH16A-A10-WG**	**1,340.21**	W6
5	7-1/2	15	~	14.5…20	260	31	**CX7-23E-10-✱-AH20A-A10-WG**	**1,382.71**	W6
5	7-1/2	15	~	18…25	325	33	**CX7-23E-10-✱-AH25A-A10-WG**	**1,382.71**	W6
KTA7-45H High Interrupting Capacity									
3	3	7-1/2	10	6.3…10	130	36	**CX7-30E-10-✱-AH10A-A10-WG**	**1,668.78**	W7
5	5	10	15	10…16	208	37	**CX7-30E-10-✱-AH16A-A10-WG**	**1,668.78**	W7
5	7-1/2	15	20	14.5…20	260	38	**CX7-30E-10-✱-AH20A-A10-WG**	**1,668.78**	W7
7-1/2	10	20	20	18…25	325	39	**CX7-30E-10-✱-AH25A-A10-WG**	**1,668.78**	W7
7-1/2	10	20	25	23…32	416	41	**CX7-37E-10-✱-AH32A-A10-WG**	**1,766.22**	W7
10	10	25	~	32…45	585	45	**CX7-37E-10-✱-AH45A-A10-WG**	**1,815.97**	W7
10	15	30	~	32…45	585	46	**CX7-43E-10-✱-AH45A-A10-WG**	**1,881.27**	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT7 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- CA7 contactor (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹
- Pilot device shown is factory installed option

See page F109 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❺

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Select modifications if required	**See Coil Code tables on this page for codes**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. Contact factory for these specifications.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9E-10-✱-0.16A-A10-**WG** to CX7-9E-10-✱-0.16A-A10-**WJ**.

❺ CX7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❼ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Enclosed Reversing Combination Controller, AC Operation - Type 4 / 12

Amp / Horsepower Rating							Painted Steel, Type 4 / 12 Enclosure		
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❻	Catalog Number ❹❼	Price	Dimension Code
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	1	**CXU7-9-22-✱-AS0.16A-A10-WG**	**958.77**	W6
~	~	~	~	0.16…0.25	3.3	2	**CXU7-9-22-✱-AS0.25A-A10-WG**	**958.77**	W6
~	~	~	~	0.25…0.40	5.2	3	**CXU7-9-22-✱-AS0.4A-A10-WG**	**958.77**	W6
~	~	~	~	0.40…0.63	8.2	4	**CXU7-9-22-✱-AS0.63A-A10-WG**	**991.94**	W6
~	~	1/2	3/4	0.63…1.0	13	5	**CXU7-9-22-✱-AS1A-A10-WG**	**991.94**	W6
~	~	1	1	1.0…1.6	21	6	**CXU7-9-22-✱-AS1.6A-A10-WG**	**991.94**	W6
1/2	3/4	1-1/2	2	1.6…2.5	33	7	**CXU7-9-22-✱-AS2.5A-A10-WG**	**991.94**	W6
1	1	3	3	2.5…4	52	8	**CXU7-9-22-✱-AS4A-A10-WG**	**991.94**	W6
1-1/2	2	5	~	4…6.3	82	9	**CXU7-9-22-✱-AS6.3A-A10-WG**	**991.94**	W6
3	3	7-1/2	~	6.3…10	130	11	**CXU7-12-22-✱-AS10A-A10-WG**	**1,032.36**	W6
5	5	10	~	10…16	208	12	**CXU7-16-22-✱-AS16A-A10-WG**	**1,091.45**	W6
5	7-1/2	15	~	14.5…20	260	15	**CXU7-23-22-✱-AS20A-A10-WG**	**1,115.29**	W6
KTA7-25H High Interrupting Capacity									
1/2	3/4	1-1/2	2	1.6…2.5	33	17	**CXU7-9-22-✱-AH2.5A-A10-WG**	**1,049.99**	W6
1	1	3	3	2.5…4	52	19	**CXU7-9-22-✱-AH4A-A10-WG**	**1,049.99**	W6
1/1/2	2	5	5	4…6.3	82	22	**CXU7-9-22-✱-AH6.3A-A10-WG**	**1,049.99**	W6
3	3	7-1/2	10	6.3…10	130	24	**CXU7-12-22-✱-AH10A-A10-WG**	**1,136.02**	W6
5	5	10	15	10…16	208	28	**CXU7-16-22-✱-AH16A-A10-WG**	**1,159.86**	W6
5	7-1/2	15	~	14.5…20	260	31	**CXU7-23-22-✱-AH20A-A10-WG**	**1,184.74**	W6
5	7-1/2	15	~	18…25	325	33	**CXU7-23-22-✱-AH25A-A10-WG**	**1,184.74**	W6
KTA7-45H High Interrupting Capacity									
3	3	7-1/2	10	6.3…10	130	36	**CXU7-30-22-✱-AH10A-A10-WG**	**1,388.93**	W7
5	5	10	15	10…16	208	37	**CXU7-30-22-✱-AH16A-A10-WG**	**1,388.93**	W7
5	7-1/2	15	20	14.5…20	260	38	**CXU7-30-22-✱-AH20A-A10-WG**	**1,388.93**	W7
7-1/2	10	20	20	18…25	325	39	**CXU7-30-22-✱-AH25A-A10-WG**	**1,388.93**	W7
7-1/2	10	20	25	23…32	416	41	**CXU7-37-22-✱-AH32A-A10-WG**	**1,335.03**	W7
10	10	25	~	32…45	585	45	**CXU7-37-22-✱-AH45A-A10-WG**	**1,508.13**	W7
10	15	30	~	32…45	585	46	**CXU7-43-22-✱-AH45A-A10-WG**	**1,565.13**	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT7 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- CA7 contactors (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F109 for factory installed modifications

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
208	~	208V
220W	**200V-220V**	**208V-240V**
240	220V	240V
277	240V	277V
380 ❼	380V-400V	440V
480 ❼	**440V**	**480V**
600 ❼	550v	600V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for these applications.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9-10-✱-0.16A-A10-**WG** to CXU7-9-10-✱-0.16A-A10-**WJ**.

❺ Other voltages available, see Section A in this catalog.

❻ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❼ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

Amp / Horsepower Rating

Painted Steel, Type 4 / 12 Enclosure

Max. Horsepower ❶❷❸ Three Phase 200V	230V	460V	575V	O/L Relay Ampere Range	Magnetic Response Current	Index ❻	Catalog Number ❹	Price	Dimension Code
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	1	**CXU7-9E-22-✱-AS0.16A-A10-WG**	**1,207.54**	W6
~	~	~	~	0.16…0.25	3.3	2	**CXU7-9E-22-✱-AS0.25A-A10-WG**	**1,207.54**	W6
~	~	~	~	0.25…0.40	5.2	3	**CXU7-9E-22-✱-AS0.4A-A10-WG**	**1,207.54**	W6
~	~	~	~	0.40…0.63	8.2	4	**CXU7-9E-22-✱-AS0.63A-A10-WG**	**1,239.67**	W6
~	~	1/2	3/4	0.63…1.0	13	5	**CXU7-9E-22-✱-AS1A-A10-WG**	**1,239.67**	W6
~	~	1	1	1.0…1.6	21	6	**CXU7-9E-22-✱-AS1.6A-A10-WG**	**1,239.67**	W6
1/2	3/4	1-1/2	2	1.6…2.5	33	7	**CXU7-9E-22-✱-AS2.5A-A10-WG**	**1,239.67**	W6
1	1	3	3	2.5…4	52	8	**CXU7-9E-22-✱-AS4A-A10-WG**	**1,239.67**	W6
1-1/2	2	5	~	4…6.3	82	9	**CXU7-9E-22-✱-AS6.3A-A10-WG**	**1,239.67**	W6
3	3	7-1/2	~	6.3…10	130	11	**CXU7-12E-22-✱-AS10A-A10-WG**	**1,326.74**	W6
5	5	10	~	10…16	208	12	**CXU7-16E-22-✱-AS16A-A10-WG**	**1,410.69**	W6
5	7-1/2	15	~	14.5…20	260	15	**CXU7-23E-22-✱-AS20A-A10-WG**	**1,460.45**	W6
KTA7-25H High Interrupting Capacity									
1/2	3/4	1-1/2	2	1.6…2.5	33	17	**CXU7-9E-22-✱-AH2.5A-A10-WG**	**1,300.82**	W6
1	1	3	3	2.5…4	52	19	**CXU7-9E-22-✱-AH4A-A10-WG**	**1,300.82**	W6
1/1/2	2	5	5	4…6.3	82	22	**CXU7-9E-22-✱-AH6.3A-A10-WG**	**1,300.82**	W6
3	3	7-1/2	10	6.3…10	130	24	**CXU7-12E-22-✱-AH10A-A10-WG**	**1,430.39**	W6
5	5	10	15	10…16	208	28	**CXU7-16E-22-✱-AH16A-A10-WG**	**1,479.10**	W6
5	7-1/2	15	~	14.5…20	260	31	**CXU7-23E-22-✱-AH20A-A10-WG**	**1,530.92**	W6
5	7-1/2	15	~	18…25	325	33	**CXU7-23E-22-✱-AH25A-A10-WG**	**1,530.92**	W6
KTA7-45H High Interrupting Capacity									
3	3	7-1/2	10	6.3…10	130	36	**CXU7-30E-22-✱-AH10A-A10-WG**	**1,796.28**	W7
5	5	10	15	10…16	208	37	**CXU7-30E-22-✱-AH16A-A10-WG**	**1,796.28**	W7
5	7-1/2	15	20	14.5…20	260	38	**CXU7-30E-22-✱-AH20A-A10-WG**	**1,796.28**	W7
7-1/2	10	20	20	18…25	325	39	**CXU7-30E-22-✱-AH25A-A10-WG**	**1,796.28**	W7
7-1/2	10	20	25	23…32	416	41	**CXU7-37E-22-✱-AH32A-A10-WG**	**1,967.30**	W7
10	10	25	~	32…45	585	45	**CXU7-37E-22-✱-AH45A-A10-WG**	**2,048.15**	W7
10	15	30	~	32…45	585	46	**CXU7-43E-22-✱-AH45A-A10-WG**	**2,118.63**	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT7 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE or KT7-45-TE)
- CA7 contactors (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F109 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❺

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Select modifications if required	**See Coil Code tables on this page for codes**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for these applications.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9E-10-✱-0.16A-A10-**WG** to CXU7-9E-10-✱-0.16A-A10-**WJ**.

❺ CXU7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❻ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Non-Reversing and Reversing CX7 Combination Controller Modifications (Factory Assembled)

Description	Add Suffix to Catalog Number	Price Adder
Pilot Devices ❶		
START-STOP multi-function pushbutton	3U eX	202.12
ON-OFF multi-function pushbutton	4U eX	202.12
FOR-STOP-REV multi-function pushbutton	3U	362.78
UP-STOP-DOWN multi-function pushbutton	4U	362.78
OPEN-STOP-CLOSE multi-function pushbutton	5U	362.78
HAND-AUTO selector switch	5 eX	202.12
OFF-ON selector switch	6 eX	202.12
HAND-OFF-AUTO selector switch	7 eX	202.12
FOR-OFF-REV selector switch	6	362.78
UP-OFF-DOWN selector switch	7	362.78
OPEN-OFF-CLOSE selector switch	8	362.78
Pilot light only ❸	1 eX	138.89
Pilot lights only (2) ❸	2 eX	269.49
Pilot light w/ START-STOP multi-function pushbutton ❸	13U eX	342.05
Pilot light w/ ON-OFF multi-function pushbutton ❸	14U eX	342.05
Pilot light w/ HAND-AUTO selector switch ❸	15 eX	342.05
Pilot light w/ OFF-ON selector switch ❸	16 eX	342.05
Pilot light w/ HAND-OFF-AUTO selector switch ❸	17 eX	342.05
Control Power Transformer		
(with fused primary and secondary) *Primary volts* / *Secondary volts*	Replace (✱) in catalog # with the following codes ❷	
50 watt Standard Capacity: 208 / 120	XA	321.32
240 / 120	XB eX	321.32
480 / 120	XC eX	321.32
575 / 120	XD	321.32
380 / 110	XG	321.32
240 / 24	XE eX	321.32
480 / 24	XF eX	321.32
600 / 24	XJ eX	321.32
KT7 Auxiliaries & Trip Contacts eX	**Change "-A10-" to ...**	
Front mount 300V maximum		
1 NO Auxiliary	-A10	57.01
1 NC Auxiliary	-A01	57.01
1 NO + 1 NC Auxiliary	-A11	64.26
2 NO Auxiliaries	-A20	64.26
1 NO SC+OL + 1 NC Auxiliary	-T10A01	81.89
1 NO SC+OL + 1 NO Auxiliary	-T10A10	81.89
Side Mount 600V maximum		
2 NC Auxiliaries	-AS02	67.37
2 NO Auxiliaries	-AS20	67.37
1 NO + 1 NC Auxiliary	-AS11	67.37
1 NC SC+OL + 1 NO Auxiliary	-R10	88.10
1 NC SC+OL + 1 NC Auxiliary	-R11	88.10

Description	Add Suffix to Catalog Number	Price Adder
Additional KT7 Trip Contacts - Side Mount (600V max)		
1 NO SC+OL + 1 NO SC	-R00	97.43
1 NO SC+OL + 1 NC SC	-R01	97.43
1 NC SC+OL + 1 NO SC	-R10	97.43
KT7 Accessories		
Undervoltage Release Module (Select coil voltage from table below)	-UA-✱	130.60
Shunt Release Module	-AA-✱	130.60
CA7 Auxiliary Contacts ❺		
1 NO Auxiliary	-S10 eX	46.64
1 NC Auxiliary	-S01 eX	46.64
1 NO + 1 NC Auxiliary	-S11	59.08
2 NO Auxiliaries	-S20	59.08
2 NC Auxiliaries	-S02	59.08
1 NO + 2 NC Auxiliary	-S12	88.10
2 NO + 1 NC Auxiliary	-S21	88.10
3 NO Auxiliaries	-S30	88.10
3 NC Auxiliaries	-S03	88.10
1 NO + 3 NC Auxiliary	-S13	75.67
3 NO + 1 NC Auxiliary	-S31	75.67
2 NO + 2 NC Auxiliary	-S22	75.67
4 NO Auxiliaries	-S40	75.67
4 NC Auxiliaries	-S04	75.67
Alternate Aux. Contact Arrangement (CA7 only)		
1 NC in lieu of standard 1 NO	-SX10	17.62
2 NC in lieu of standard 2 NO (on CXU7 only)	-SX2	17.62
CA7 Contactor Accessories		
Electronic Interface	-JE ❹ eX	97.43
Surge Suppressor RC	-R	55.97
Surge Suppressor Varistor	-V	41.46
Unwired Terminal Blocks Specify quantity (▼)	-▼TB	21.76

-UA..-AA Coil Codes (✱)

	AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
eX	**24V**	21V	24V
	28V	24V	28V
eX	**120V**	**105V**	**120V**
	127V	110V	127V
	230V	220...230V	~
eX	**240V**	~	240...260V
	277V	240V	277V
	460V	380...400V	400...460V
eX	**480V**	415V	480V
eX	**600V**	550V	600V

eX This item is available in the ORANGE EXPRESS 3-day shipping program

❶ Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X. See Section H in this catalog for description (all suffix's ending in "U").

❷ Factory modifications often change the enclosure size. Refer to factory for dimensions when critical to the installation.

❸ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 277 VAC...575VAC require a control circuit transformer.

❹ CRI7E-24 will be used. CRI7E-12 by special order only.

❺ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications. Multiply price adder by two (2).

CX7 Explosion Proof Combination Controllers - NEMA Type 4/4X/7/9 with Type 4 Gaskets

Amp / Horsepower Rating	Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❺	Price	Dimension Code
	200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity									
	~	~	~	~	0.10…0.16	2.1	**CX7-9-10-✱-AS0.16A-A10-EZ**		EZ
	~	~	~	~	0.16…0.25	3.3	**CX7-9-10-✱-AS0.25A-A10-EZ**	**1,977.67**	EZ
	~	~	~	~	0.25…0.40	5.2	**CX7-9-10-✱-AS0.4A-A10-EZ**	**1,977.67**	EZ
	~	~	~	~	0.40…0.63	8.2	**CX7-9-10-✱-AS0.63A-A10-EZ**	**2,017.05**	EZ
	~	~	1/2	3/4	0.63…1.0	13	**CX7-9-10-✱-AS1A-A10-EZ**	**2,017.05**	EZ
	~	~	1	1	1.0…1.6	21	**CX7-9-10-✱-AS1.6A-A10-EZ**	**2,017.05**	EZ
	1/2	3/4	1-1/2	2	1.6…2.5	33	**CX7-9-10-✱-AS2.5A-A10-EZ**	**2,017.05**	EZ
	1	1	3	3	2.5…4	52	**CX7-9-10-✱-AS4A-A10-EZ**	**2,017.05**	EZ
	1-1/2	2	5	~	4…6.3	82	**CX7-9-10-✱-AS6.3A-A10-EZ**	**2,017.05**	EZ
	3	3	7-1/2	~	6.3…10	130	**CX7-12-10-✱-AS10A-A10-EZ**	**2,053.33**	EZ
	5	5	10	~	10…16	208	**CX7-16-10-✱-AS16A-A10-EZ**	**2,116.55**	EZ
	5	7-1/2	15	~	14.5…20	260	**CX7-23-10-✱-AS20A-A10-EZ**	**2,138.33**	EZ
KTA7-25H High Interrupting Capacity									
	1/2	3/4	1-1/2	2	1.6…2.5	33	**CX7-9-10-✱-AH2.5A-A10-EZ**	**2,087.54**	EZ
	1	1	3	3	2.5…4	52	**CX7-9-10-✱-AH4A-A10-EZ**	**2,087.54**	EZ
	1/1/2	2	5	5	4…6.3	82	**CX7-9-10-✱-AH6.3A-A10-EZ**	**2,087.54**	EZ
	3	3	7-1/2	10	6.3…10	130	**CX7-12-10-✱-AH10A-A10-EZ**	**2,175.64**	EZ
	5	5	10	15	10…16	208	**CX7-16-10-✱-AH16A-A10-EZ**	**2,197.41**	EZ
	5	7-1/2	15	~	14.5…20	260	**CX7-23-10-✱-AH20A-A10-EZ**	**2,219.17**	EZ
	5	7-1/2	15	~	18…25	325	**CX7-23-10-✱-AH25A-A10-EZ**	**2,219.17**	EZ
KTA7-45H High Interrupting Capacity									
	3	3	7-1/2	10	6.3…10	130	**CX7-30-10-✱-AH10A-A10-EZ**	**2,434.77**	EZ
	5	5	10	15	10…16	208	**CX7-30-10-✱-AH16A-A10-EZ**	**2,434.77**	EZ
	5	7-1/2	15	20	14.5…20	260	**CX7-30-10-✱-AH20A-A10-EZ**	**2,434.77**	EZ
	7-1/2	10	20	20	18…25	325	**CX7-30-10-✱-AH25A-A10-EZ**	**2,434.77**	EZ
	7-1/2	10	20	25	23…32	416	**CX7-30-10-✱-AH32A-A10-EZ**	**2,474.15**	EZ
	10	10	25	~	32…45	585	**CX7-37-10-✱-AH45A-A10-EZ**	**2,550.85**	EZ
	10	15	30	~	32…45	585	**CX7-43-10-✱-AH45A-A10-EZ**	**2,572.62**	EZ

Includes:

- Class I, Div I, Group B, C & D – Class II, Div I, Group E, F & G enclosure Class III, Zone I, IIB & H2
- KT7 "Type E" Self-protected Combination Manual Motor Controller with 1 NO front mount auxiliary contact (Cat.# KT7-PE1-10)
- Terminal Adaptor for Combo Type E/F Applications (Cat.# KT7-25-TE or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring

Modifications (Factory Assembled)

KT7 Auxiliaries & Trip Contacts,	Change "A10" in Cat. # to...	Price Adder
Front Mount 300V max.		
1 NC Auxiliary	**-A01**	**64.26**
1 NO + 1 NC Auxiliary	**-A11**	**71.52**
2 NO Auxiliaries	**-A20**	**71.52**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**	**89.14**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**	**89.14**
Side Mount 600V max.		
2 NO Auxiliaries	**-AS20**	**81.89**
1 NO + 1 NC Auxiliary	**-AS11**	**81.89**
1 NC SC+OL + 1 NO Auxiliary	**-R10**	**97.43**
1 NC SC+OL + 1 NC Auxiliary	**-R11**	**97.43**
CA7 Contactor Accessories	**Add Suffix to Cat. Number**	**Price Adder**
1 NC Auxiliary	**-S01**	**46.64**
1 NO Auxiliary	**-S10**	**46.64**
Electronic Interface	**-JE**	**97.43**
Surge Suppressor RC	**-R**	**55.97**
Surge Suppressor Varistor	**-V**	**41.46**
Enclosure Modifications		
Dual START/STOP pushbutton	**3**	**402.17**
ON/OFF selector switch	**6**	**402.17**
H-O-A	**7**	**402.17**
Breather/Drain	**-BD**	**151.33**

Contactor AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
208	~	208V
220W	**200V-220V**	**208V-240V**
240	220V	240V
277	240V	277V
380 ❺	380V-400V	440V
480 ❺	**440V**	**480V**
600 ❺	550v	600V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CX7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change **CX7**-9-10-✱-0.16A-A10-EZ to **CBX7**-9-10-✱-0.16A-A10-EZ.

❹ Other voltages available, see Section A in this catalog.

❺ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Select modifications if required	**See tables on this page for codes**

Type E/F Simplex & Duplex Pump Controllers

CXP7-9...

Simplex Pump Controllers

A single KTA7 motor controller plus matching CA7 contactor can be combined in an enclosure as a Simplex Combination Controller for pumping applications. Additional space is provided for the customer to field addition of time clocks or float switches as required by the application. An environmentally approved thru-the-door handle provides for a required disconnect. These pump panels can be supplied with Suitable for Service Entrance (SUSE) label on demand. Type E/F pump panels are less expensive than the classic Construction Type A (Fusible) or Construction Type C (MCCB) versions shown in Section C of this catalog.

Type E/F Simplex Pump Controller Panels include:

- Contactor (with AC coil)
- Type E Self-protected motor controller
- "START" Momentary Push Button
- "HOA" Selector Switch
- A minimum of 6" x 10" extra back pan space
- UL Type rated enclosure

Duplex Pump Controllers

Two starter duplex panels can be fed from one power source or two power sources and include lead/lag control circuitry to meet customers' need in pumping and many other applications. Two environmentally approved thru-the-door handle disconnect mechanisms means no main feeder device is required and smaller and less expensive panel than a classic duplex panel as offered in Section C of this catalog. The following pages include a selection of duplex controllers and you can contact your Sprecher + Schuh representative to modify the selection.

Type E/F Duplex Pump Controller Panels include:

- (2) Contactors (AC coil) and (2) Type E/F self protected motor controllers
- (1) Electronic alternating relay
- (1) UL type rated enclosure
- Designed per alternation control diagram shown at bottom of page F117

CXDP7-9...

Series CXP7 & Type E/F Combo Pump Panel

Max. Horsepower ❶❷❸ Three Phase				Current Adjustment Range (A)	Magnetic Response Current	Type 3R Rainproof (Metal)		Dimension Code	Type 4X Watertight Corrosion Resistant Non-metallic		Dimension Code
200V	230V	460V	575V			Catalog Number ❹❻	Price		Catalog Number ❹❻	Price	
KTA7-25S Standard Interrupting Capacity											
~	~	~	~	0.10…0.16	2.1	CXP7-9-10-✱-AS0.16A-A10-RG	1,136.02	O	CXP7-9-10-✱-AS0.16A-A10-CG	R/F	R/F
~	~	~	~	0.16…0.25	3.3	CXP7-9-10-✱-AS0.25A-A10-RG	1,136.02	O	CXP7-9-10-✱-AS0.25A-A10-CG	R/F	R/F
~	~	~	~	0.25…0.40	5.2	CXP7-9-10-✱-AS0.4A-A10-RG	1,136.02	O	CXP7-9-10-✱-AS0.4A-A10-CG	R/F	R/F
~	~	~	~	0.40…0.63	8.2	CXP7-9-10-✱-AS0.63A-A10-RG	1,136.02	O	CXP7-9-10-✱-AS0.63A-A10-CG	R/F	R/F
~	~	1/2	3/4	0.63…1.0	13	CXP7-9-10-✱-AS1A-A10-RG	1,136.02	O	CXP7-9-10-✱-AS1A-A10-CG	R/F	R/F
~	~	1	1	1.0…1.6	21	CXP7-9-10-✱-AS1.6A-A10-RG	1,136.02	O	CXP7-9-10-✱-AS1.6A-A10-CG	R/F	R/F
1/2	3/4	1-1/2	2	1.6…2.5	33	CXP7-9-10-✱-AS2.5A-A10-RG	1,136.02	O	CXP7-9-10-✱-AS2.5A-A10-CG	R/F	R/F
1	1	3	3	2.5…4	52	CXP7-9-10-✱-AS4A-A10-RG	1,136.02	O	CXP7-9-10-✱-AS4A-A10-CG	R/F	R/F
1-1/2	2	5	~	4…6.3	82	CXP7-9-10-✱-AS6.3A-A10-RG	1,136.02	O	CXP7-9-10-✱-AS6.3A-A10-CG	R/F	R/F
3	3	7-1/2	~	6.3…10	130	CXP7-12-10-✱-AS10A-A10-RG	1,179.56	O	CXP7-12-10-✱-AS10A-A10-CG	R/F	R/F
5	5	10	~	10…16	208	CXP7-16-10-✱-AS16A-A10-RG	1,244.85	O	CXP7-16-10-✱-AS16A-A10-CG	R/F	R/F
5	7-1/2	15	~	14.5…20	260	CXP7-23-10-✱-AS20A-A10-RG	1,270.76	O	CXP7-23-10-✱-AS20A-A10-CG	R/F	R/F
KTA7-25H High Interrupting Capacity											
1/2	3/4	1-1/2	2	1.6…2.5	33	CXP7-9-10-✱-AH2.5A-A10-RG	1,211.69	O	CXP7-9-10-✱-AH2.5A-A10-CG	R/F	R/F
1	1	3	3	2.5…4	52	CXP7-9-10-✱-AH4A-A10-RG	1,211.69	O	CXP7-9-10-✱-AH4A-A10-CG	R/F	R/F
1/1/2	2	5	5	4…6.3	82	CXP7-9-10-✱-AH6.3A-A10-RG	1,211.69	O	CXP7-9-10-✱-AH6.3A-A10-CG	R/F	R/F
3	3	7-1/2	10	6.3…10	130	CXP7-12-10-✱-AH10A-A10-RG	1,307.04	O	CXP7-12-10-✱-AH10A-A10-CG	R/F	R/F
5	5	10	15	10…16	208	CXP7-16-10-✱-AH16A-A10-RG	1,330.88	O	CXP7-16-10-✱-AH16A-A10-CG	R/F	R/F
5	7-1/2	15	~	14.5…20	260	CXP7-23-10-✱-AH20A-A10-RG	1,356.80	O	CXP7-23-10-✱-AH20A-A10-CG	R/F	R/F
5	7-1/2	15	~	18…25	325	CXP7-23-10-✱-AH25A-A10-RG	1,356.80	O	CXP7-23-10-✱-AH25A-A10-CG	R/F	R/F
KTA7-45H High Interrupting Capacity											
3	3	7-1/2	10	6.3…10	130	CXP7-30-10-✱-AH10A-A10-RG	1,527.82	Q	CXP7-30-10-✱-AH10A-A10-CG	R/F	R/F
5	5	10	15	10…16	208	CXP7-30-10-✱-AH16A-A10-RG	1,527.82	Q	CXP7-30-10-✱-AH16A-A10-CG	R/F	R/F
5	7-1/2	15	20	14.5…20	260	CXP7-30-10-✱-AH20A-A10-RG	1,527.82	Q	CXP7-30-10-✱-AH20A-A10-CG	R/F	R/F
7-1/2	10	20	20	18…25	325	CXP7-30-10-✱-AH25A-A10-RG	1,527.82	Q	CXP7-30-10-✱-AH25A-A10-CG	R/F	R/F
7-1/2	10	20	25	23…32	416	CXP7-30-10-✱-AH32A-A10-RG	1,527.82	Q	CXP7-30-10-✱-AH32A-A10-CG	R/F	R/F
10	10	25	~	32…45	585	CXP7-37-10-✱-AH45A-A10-RG	1,642.87	Q	CXP7-37-10-✱-AH45A-A10-CG	R/F	R/F
10	15	30	~	32…45	585	CXP7-43-10-✱-AH45A-A10-RG	1,677.08	Q	CXP7-43-10-✱-AH45A-A10-CG	R/F	R/F

NOTE: Catalog Numbers, list Prices and enclosure dimensions reflect contactors with AC coils. Contact factory for DC applications.

R/F - Experience has shown that applications using non-metallic enclosures often require customized pump panels (i.e. Door-in-Door or unique control circuit). Contact your Sprecher + Schuh representative for a customized price.

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
208	~	208V
220W	**200V-220V**	**208V-240V**
240	220V	240V
277	240V	277V
380 ❻	380V-400V	440V
480 ❻	**440V**	**480V**
600 ❻	550v	600V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Factory Modifications available	**See this page** **Contact factory**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXP7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CXP7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change **CXP7**-9-10-✱-0.16A-A10-RG to **CBXP7**-9-10-✱-0.16A-A10-RG.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "RG" suffix to "RJ". Ex: Change CXP7-9-10-✱-0.16A-A10-**RG** to CXP7-9-10-✱-0.16A-A10-**RJ**.

❺ Other voltages available, see Section A in this catalog.

❻ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Series CXDP7 with Type E/F Combination Controller

Max. Horsepower Three Phase				Current Adjustment Range (A)	Magnetic Response Current	Type 3R Rainproof (Metal)			Type 4X Watertight Corrosion Resistant Non-metallic		
200V	230V	460V	575V			Catalog Number ❷	Price	Dimension Code	Catalog Number ❷	Price	Dimension Code
KTA7-25S Standard Interrupting Capacity											
~	~	~	~	0.10…0.16	2.1	CXDP7-9-10-✱-AS0.16A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AS0.16A-A10-CG	R/F	R/F
~	~	~	~	0.16…0.25	3.3	CXDP7-9-10-✱-AS0.25A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AS0.25A-A10-CG	R/F	R/F
~	~	~	~	0.25…0.40	5.2	CXDP7-9-10-✱-AS0.4A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AS0.4A-A10-CG	R/F	R/F
~	~	~	~	0.40…0.63	8.2	CXDP7-9-10-✱-AS0.63A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AS0.63A-A10-CG	R/F	R/F
~	~	1/2	3/4	0.63…1.0	13	CXDP7-9-10-✱-AS1A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AS1A-A10-CG	R/F	R/F
~	~	1	1	1.0…1.6	21	CXDP7-9-10-✱-AS1.6A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AS1.6A-A10-CG	R/F	R/F
1/2	3/4	1-1/2	2	1.6…2.5	33	CXDP7-9-10-✱-AS2.5A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AS2.5A-A10-CG	R/F	R/F
1	1	3	3	2.5…4	52	CXDP7-9-10-✱-AS4A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AS4A-A10-CG	R/F	R/F
1-1/2	2	5	~	4…6.3	82	CXDP7-9-10-✱-AS6.3A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AS6.3A-A10-CG	R/F	R/F
3	3	7-1/2	~	6.3…10	130	CXDP7-12-10-✱-AS10A-A10-RG	R/F	R/F	CXDP7-12-10-✱-AS10A-A10-CG	R/F	R/F
5	5	10	~	10…16	208	CXDP7-16-10-✱-AS16A-A10-RG	R/F	R/F	CXDP7-16-10-✱-AS16A-A10-CG	R/F	R/F
5	7-1/2	15	~	14.5…20	260	CXDP7-23-10-✱-AS20A-A10-RG	R/F	R/F	CXDP7-23-10-✱-AS20A-A10-CG	R/F	R/F
KTA7-25H High Interrupting Capacity											
1/2	3/4	1-1/2	2	1.6…2.5	33	CXDP7-9-10-✱-AH2.5A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AH2.5A-A10-CG	R/F	R/F
1	1	3	3	2.5…4	52	CXDP7-9-10-✱-AH4A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AH4A-A10-CG	R/F	R/F
1/1/2	2	5	5	4…6.3	82	CXDP7-9-10-✱-AH6.3A-A10-RG	R/F	R/F	CXDP7-9-10-✱-AH6.3A-A10-CG	R/F	R/F
3	3	7-1/2	10	6.3…10	130	CXDP7-12-10-✱-AH10A-A10-RG	R/F	R/F	CXDP7-12-10-✱-AH10A-A10-CG	R/F	R/F
5	5	10	15	10…16	208	CXDP7-16-10-✱-AH16A-A10-RG	R/F	R/F	CXDP7-16-10-✱-AH16A-A10-CG	R/F	R/F
5	7-1/2	15	~	14.5…20	260	CXDP7-23-10-✱-AH20A-A10-RG	R/F	R/F	CXDP7-23-10-✱-AH20A-A10-CG	R/F	R/F
5	7-1/2	15	~	18…25	325	CXDP7-23-10-✱-AH25A-A10-RG	R/F	R/F	CXDP7-23-10-✱-AH25A-A10-CG	R/F	R/F
KTA7-45H High Interrupting Capacity											
3	3	7-1/2	10	6.3…10	130	CXDP7-30-10-✱-AH10A-A10-RG	R/F	R/F	CXDP7-30-10-✱-AH10A-A10-CG	R/F	R/F
5	5	10	15	10…16	208	CXDP7-30-10-✱-AH16A-A10-RG	R/F	R/F	CXDP7-30-10-✱-AH16A-A10-CG	R/F	R/F
5	7-1/2	15	20	14.5…20	260	CXDP7-30-10-✱-AH20A-A10-RG	R/F	R/F	CXDP7-30-10-✱-AH20A-A10-CG	R/F	R/F
7-1/2	10	20	20	18…25	325	CXDP7-30-10-✱-AH25A-A10-RG	R/F	R/F	CXDP7-30-10-✱-AH25A-A10-CG	R/F	R/F
7-1/2	10	20	25	23…32	416	CXDP7-30-10-✱-AH32A-A10-RG	R/F	R/F	CXDP7-30-10-✱-AH32A-A10-CG	R/F	R/F
10	10	25	~	32…45	585	CXDP7-37-10-✱-AH45A-A10-RG	R/F	R/F	CXDP7-37-10-✱-AH45A-A10-CG	R/F	R/F
10	15	30	~	32…45	585	CXDP7-43-10-✱-AH45A-A10-RG	R/F	R/F	CXDP7-43-10-✱-AH45A-A10-CG	R/F	R/F

NOTE: Catalog Numbers, list Prices and enclosure dimensions reflect contactors with AC coils. Contact factory for DC applications.

R/F - Experience has shown that applications using non-metallic enclosures often require customized pump panels (i.e. Door-in-Door or unique control circuit). Contact your Sprecher + Schuh representative for a customized price.

Contactor AC Coil Codes (✱) ❶

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
208	~	208V
220W	**200V-220V**	**208V-240V**
240	220V	240V
277	240V	277V
380 ❷	380V-400V	440V
480 ❷	**440V**	**480V**
600 ❷	550v	600V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Factory Modifications available	**See this page** **Contact factory**

❶ Other voltages available, see Section A in this catalog.

❷ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Custom Multi-Starter Control Panels

From 10 to 100 or more, consult the experts

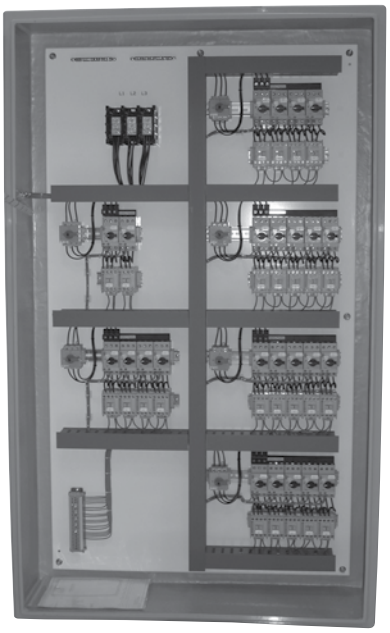

Your Motor Control + Protection Consultant

Sprecher + Schuh's slogan is "Motor control + protection consultant". This means part of our job is to be knowledgeable about these issues and to help customers choose components that not only comply with UL, NEC and CSA standards but also maximizes the SCCR rating of the assembled multi-starter panel, leading to increased protection of equipment and personnel.

Multiple KTA7, KTB7 or KTC7 motor controllers plus matching CA7 contactors can be combined in a single assembly as a multi-motor starter custom control panel. Three, 33, 133 or more motor controllers and KTU7 molded case circuit breakers, as well as other power components and control circuits, can be designed and assembled into a custom multi-motor starter by Sprecher + Schuh to meet customers' unique application requirements. These pages include a few pictures of custom multi-starter control panels built by Sprecher + Schuh. Contact your Sprecher + Schuh motor control and protection representative for consultation regarding design, quotations, or help explaining the complex UL, NEC and CSA codes that apply to a custom assembly.

For your **Custom application** contact customquotes@sprecherschuh.com

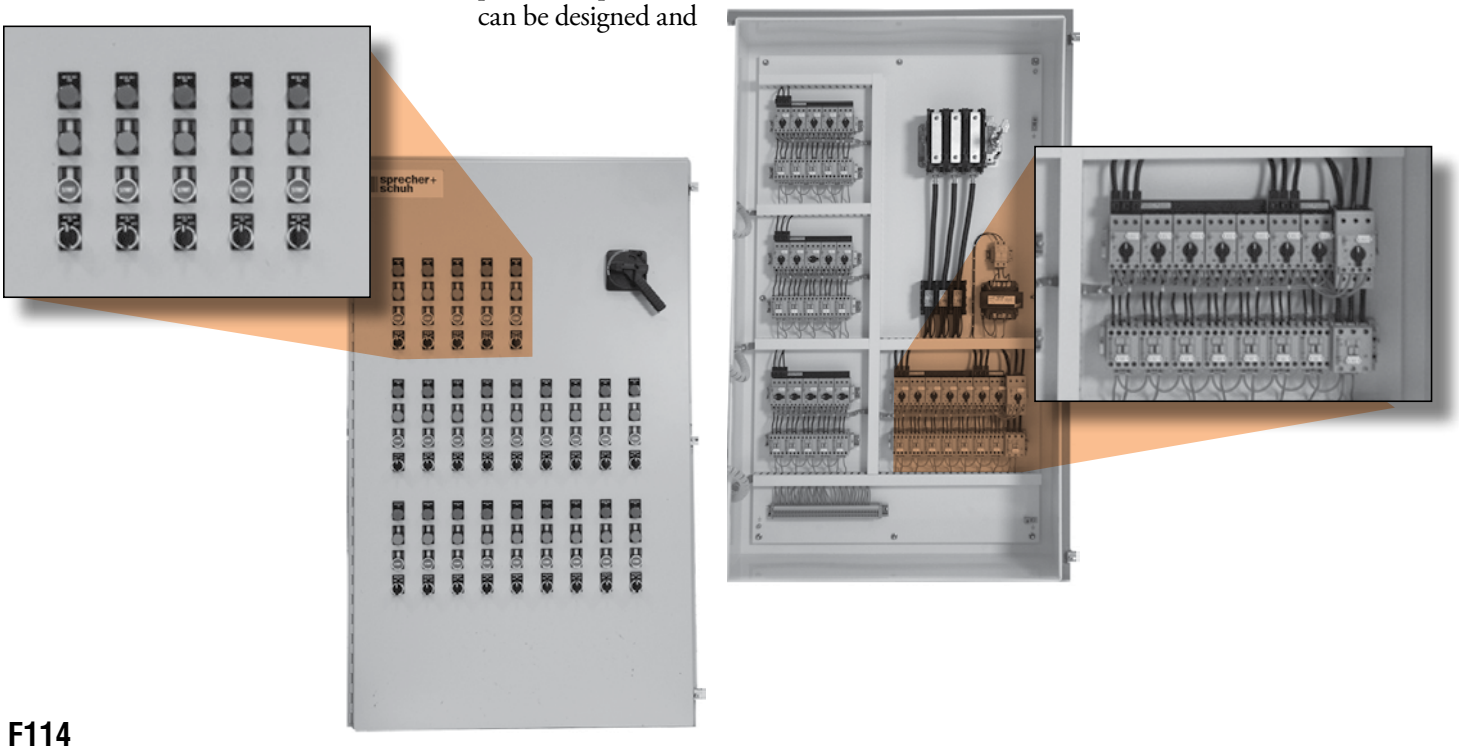

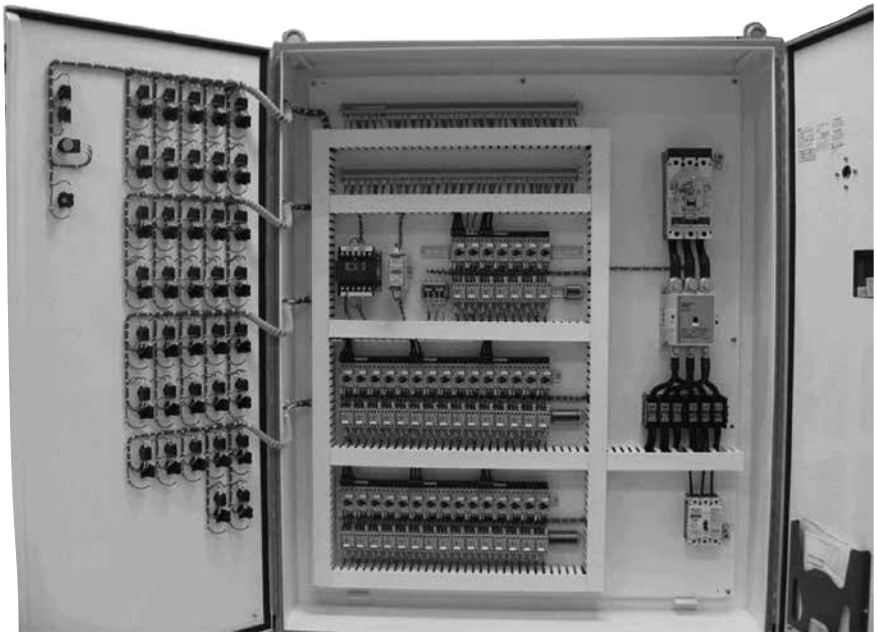

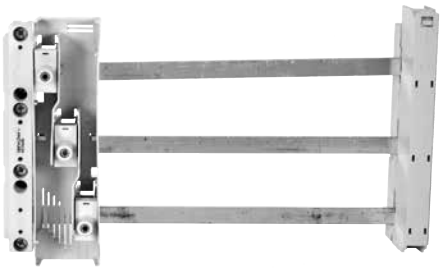

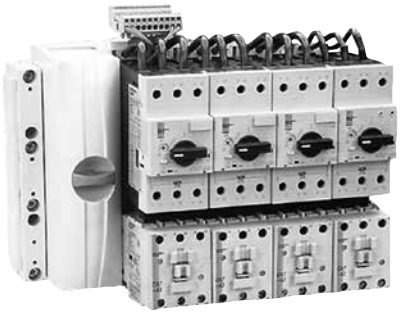

Short Circuit Current Ratings (SSCR)

Short Circuit Current Ratings as defined by UL is a hot topic of discussion within the controls marketplace.

UL 508A Industrial Control Panel specifications require every multiple motor starter panel assembly to be labeled with the Short-Circuit Current Rating (SCCR), which depends on the weakest component's KAIC rating. The SCCR rules are complicated and UL conducts classes around the country on this subject. Sprecher + Schuh conducted a survey of multi-starter panel builders which indicated an increased concern on the part of panel builders to comply with the UL regulations; yet many do not truly understand the complexity of the rules. This is another reason to consult the experts at Sprecher + Schuh.

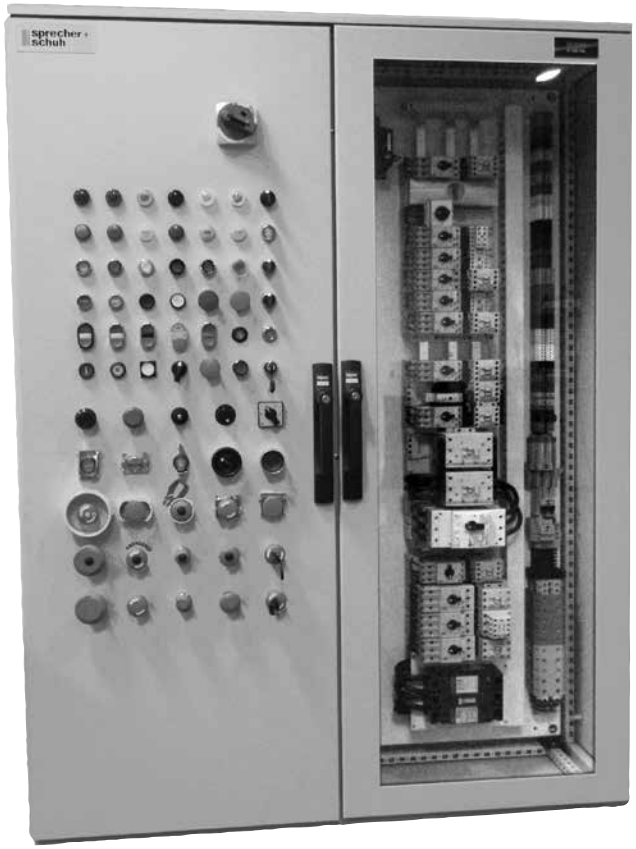

3-Phase 60mm Bus Bar System vertically arranged to maximize space

Custom Bus Bar Systems

Sprecher + Schuh has teamed-up with *Wöhner* to supply 3-phase 60 mm bus bar systems. Bus Bar systems offer more flexibility, and a smaller, more economical alternative to a Motor Control Center that uses 'bucket' design.

- Sprecher + Schuh can supply 3-phase 60 mm bus bar components for customer assembly into a control panel.
- We can help design a 3-phase 60 mm bus bar system and provide it with or without components and ship to the customer as open assembly.
- Sprecher + Schuh can help design a 3-phase 60 mm bus bar system and integrate that bus system into an enclosed assembly or multi-starter custom control panel to meet customers' unique specifications.

Please contact your local Sprecher + Schuh Representative or our Technical Support Team to help design our components to meet your needs, which can include building the custom control.

Single, Two and Three Phase Connection Diagram

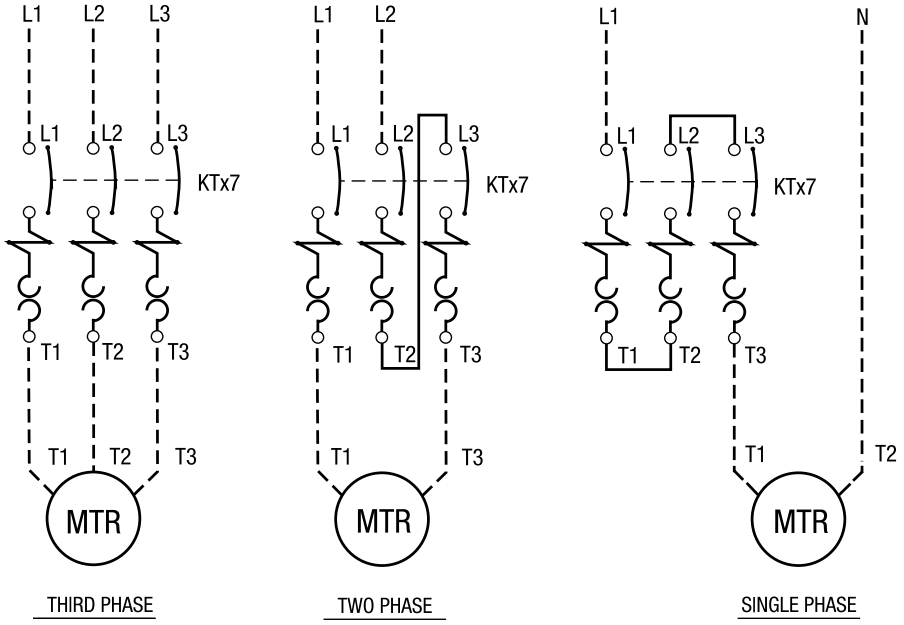

Type E/F Combination Controller Full Voltage Non-Reversing

AC Control with D7 Series Pilot Devices

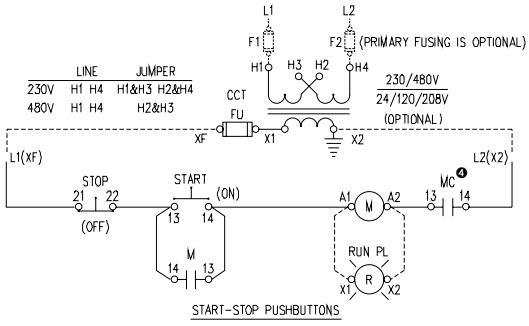

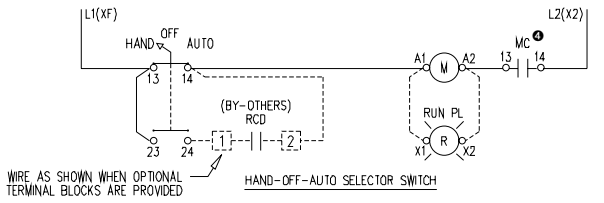

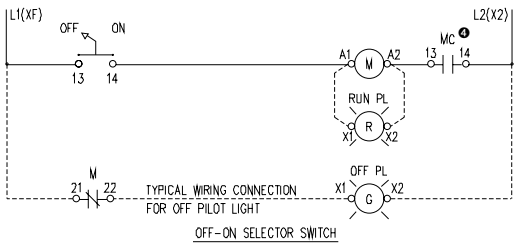

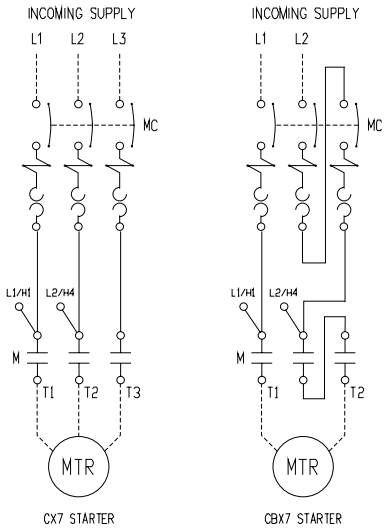

NOTES:
1) RCD: STANDS FOR REMOTE CONTROL DEVICE BY CUSTOMER
2) MC: KT7 "TYPE E" MOTOR CONTROLLER
3) X2 TERMINAL GROUNDED AS STANDARD, REMOVE GROUND IF NOT REQUIRED
4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS

KTA7 Type E/F Combination 3-PH FVNR Duplex Alternating Panel
with H-O-A, Lead, Lag and Stop 1-Pole Float Switches

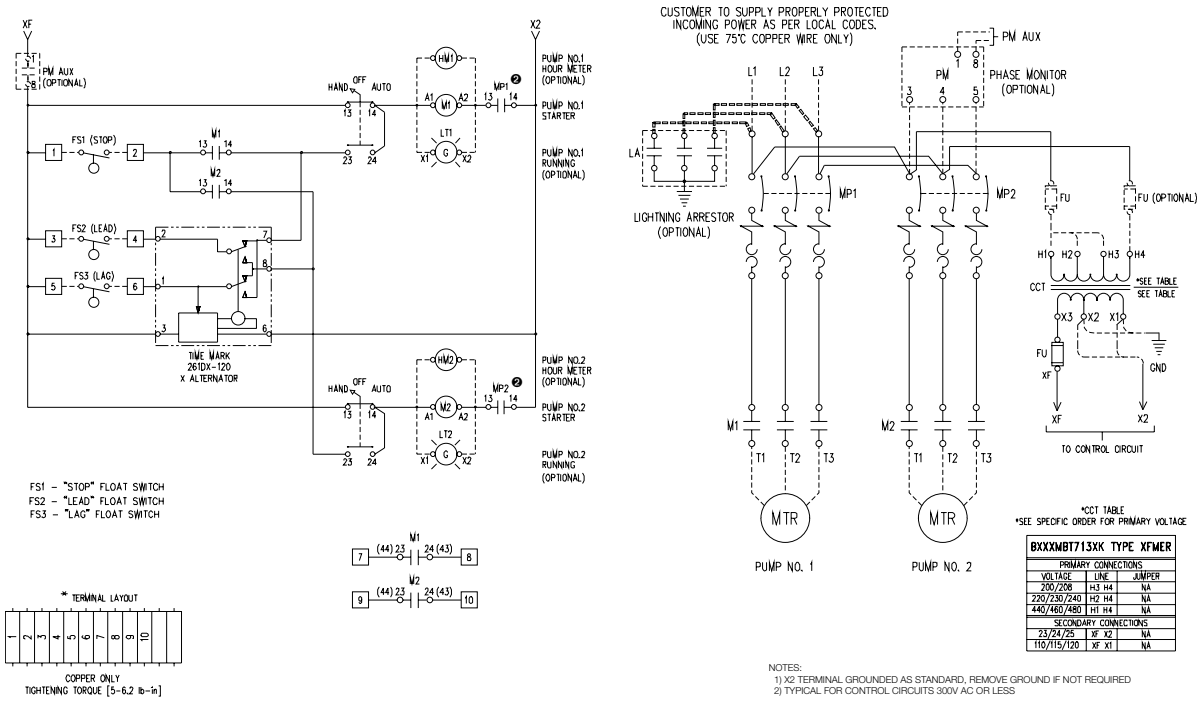

BXXXMBT713XK TYPE XFMER		
PRIMARY CONNECTIONS		
VOLTAGE	LINE	JUMPER
200/208	H3 H4	NA
220/230/240	H2 H4	NA
440/460/480	H1 H4	NA
SECONDARY CONNECTIONS		
23/24/25	XF X2	NA
110/115/120	XF X1	NA

KTA7 Type E/F Combination 3-PH FVNR Duplex Alternating Panel
with H-O-A, Alarm Circuit, Lead, Lag, Stop, 1-Pole Float Switches

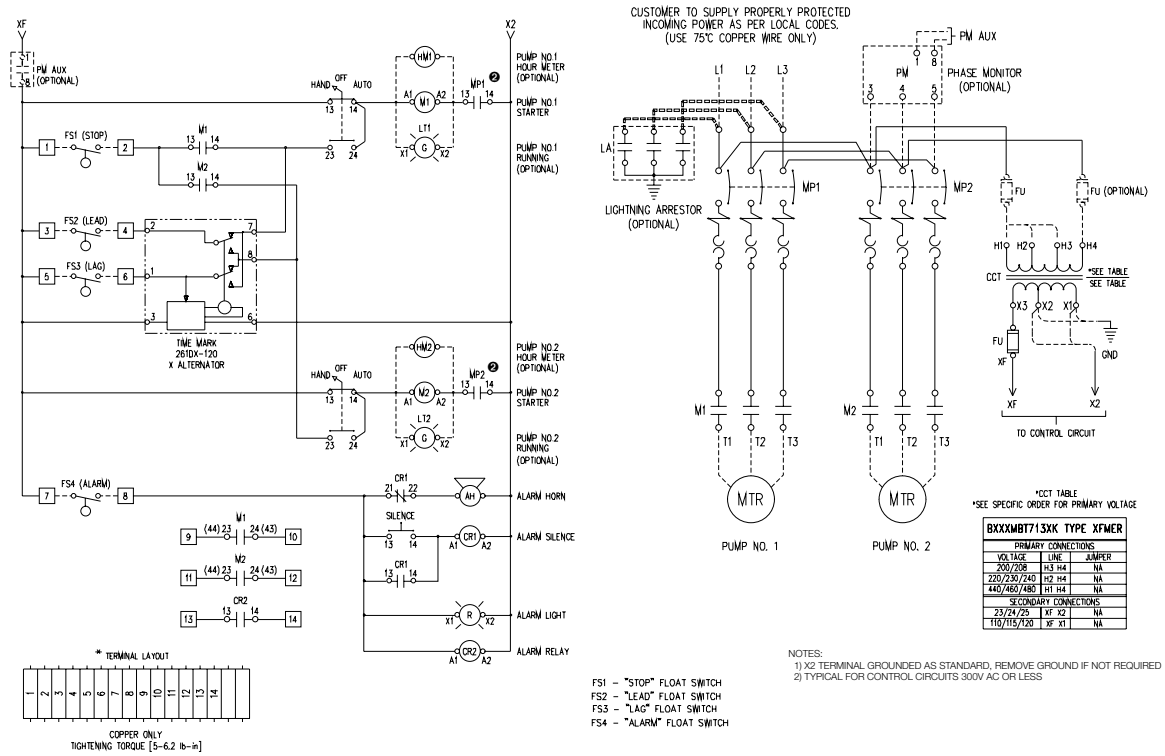

BXXXMBT713XK TYPE XFMER		
PRIMARY CONNECTIONS		
VOLTAGE	LINE	JUMPER
200/208	H3 H4	NA
220/230/240	H2 H4	NA
440/460/480	H1 H4	NA
SECONDARY CONNECTIONS		
23/24/25	XF X2	NA
110/115/120	XF X1	NA

EComboPlus/CX7 KWIKstarters Non-Reversing

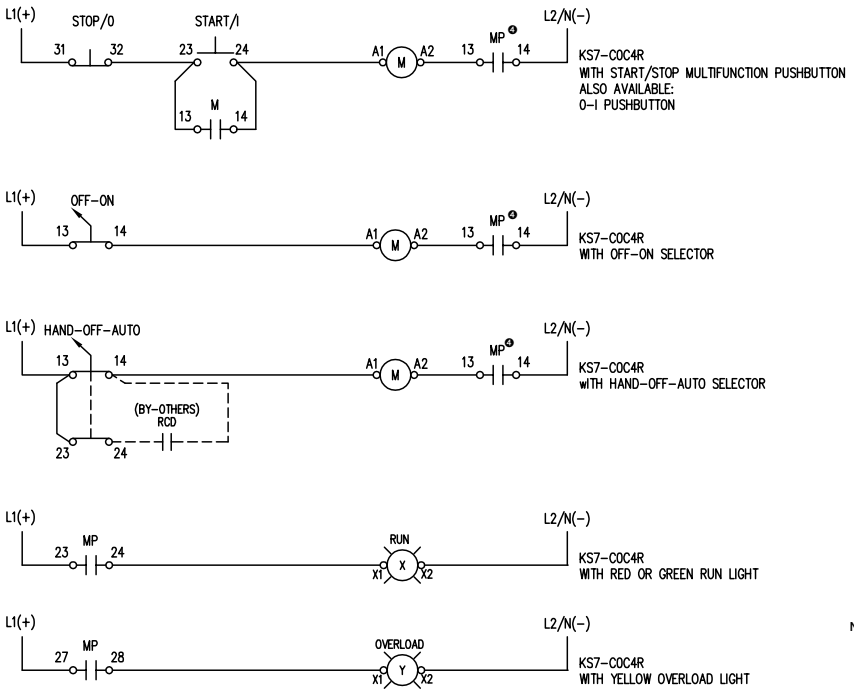

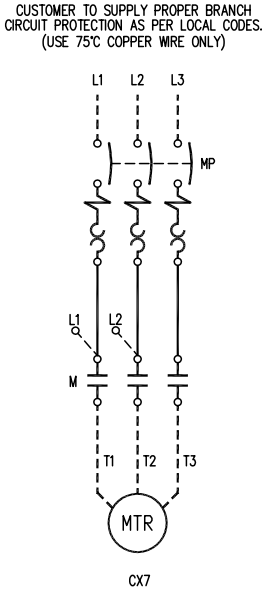

NOTES:
1) MP: KT7 "TYPE E" MOTOR CONTROLLER
2) DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE
3) OPTIONAL RUN LIGHT, MAY BE RED OR GREEN
4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS

EComboPlus/CXU7 KWIKstarters Reversing

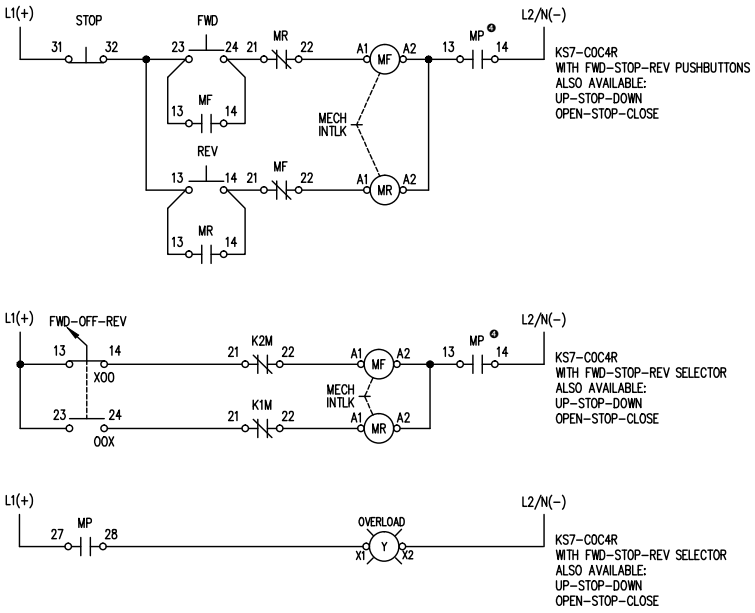

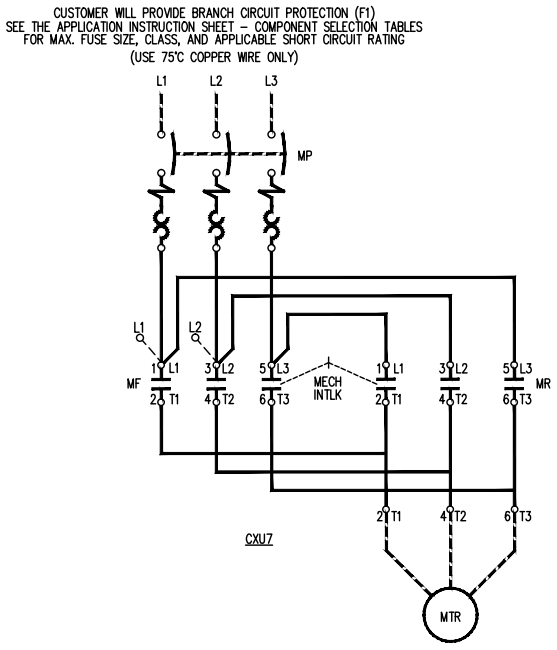

NOTES:
1) MECHANICAL INTERLOCK
2) MP: KT7 "TYPE E" MOTOR CONTROLLER
3) DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE
4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS

CX7/CXU7 KWIKstarter Enclosure KS7-COC4R *(Dimension Code Q4)*

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes.

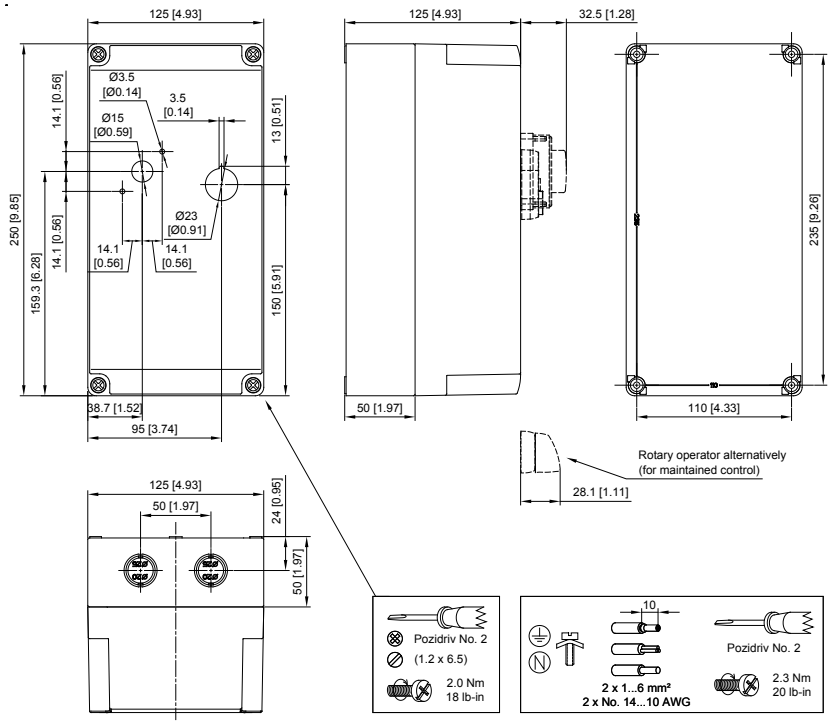

Enclosure Dimensions

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes. See dimension drawings on next page.

IP65 ENCLOSURE

Encl. ID Dim.	Figure No.	Enclosure Size A	B	C	Mtg Depth D	Mtg Centers E	F	Panel Size Sub-Pan	
AY	1	5.91	3.54	5.12	N/A	N/A	5.32	N/A	N/A

TYPE-4/4X/12 ENCLOSURE

Encl. ID Dim.	Figure No.	Enclosure Size A	B	C	Mtg Depth D	Mtg Centers E	F	Panel Size Sub-Pan	
Q5	2	7.00	5.03	5.02	4.3	4.21	6.18	N/A	N/A
Q6	3	7.00	7.00	6.02	5.3	6.18	6.18	N/A	N/A
Q7	4	11.87	7.31	10.6	7.23	6.54	11.10	N/A	N/A

TYPE-4/12 & 12 ENCLOSURES

Encl. ID Dim.	Figure No.	Enclosure Size A	B	C	Mtg Depth D	Mtg Centers E	F	Panel Size Sub-Pan		H
W6	5	9.84	7.87	8.24	5.31	5.31	9.13	9.09	7.13	-
W7	5	13.78	11.81	10.2	7.28	9.25	13.07	13.03	11.06	-
L	6	8	6	6	5.53	4	8.75	6.75	4.88	9.5

TYPE 4/7/9 ENCLOSURES

Encl. ID Dim.	Figure No.	Mtg. Dim. A	B	C	Inside Dim. D	Outside Dim. E	F	G	H	Conduit Entry Top & Bot
EX	7	3.25	7.75	3.5	6.0	3.0	4.56	7.06	6.25	0.75
EY	7	5.50	8.50	5.50	5.50	6.0	7.0	7.0	8.84	1.0
EZ	8	9.13	4.50	6.0	8.0	6.63	9.25	11.25	9.34	1.50

Enclosures

See Enclosure Dimension Charts on Previous Page.

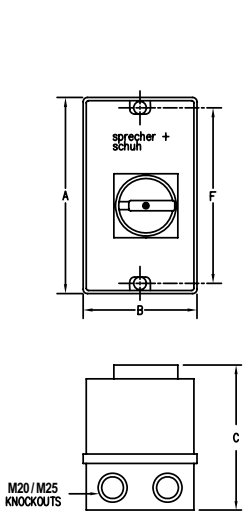

FIGURE NO. 1

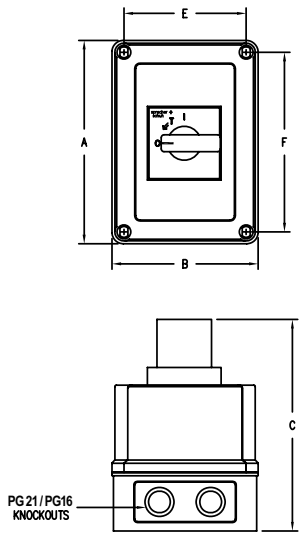

FIGURE NO. 2

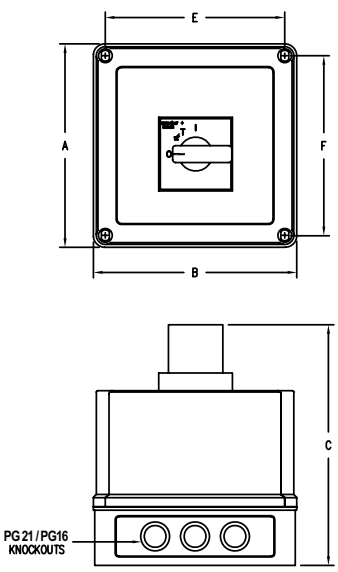

FIGURE NO. 3

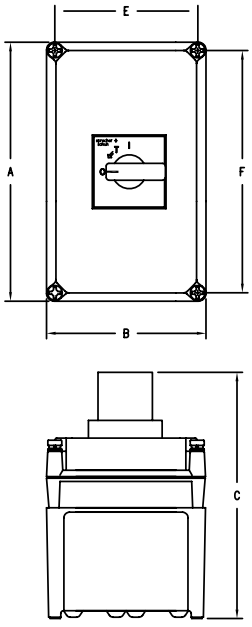

FIGURE NO. 4

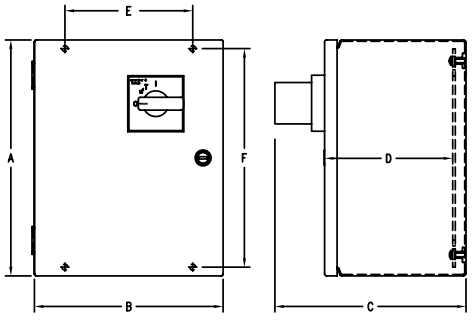

TYPE 4/12
FIGURE NO. 5

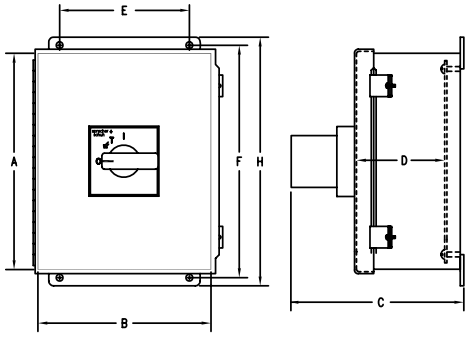

TYPE 12
FIGURE NO. 6

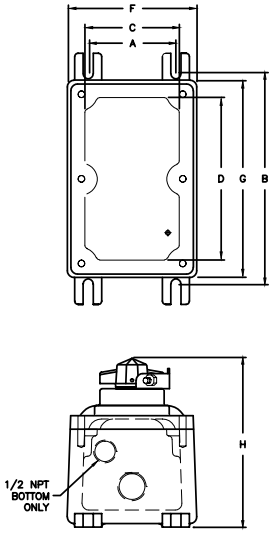

FIGURE NO. 7

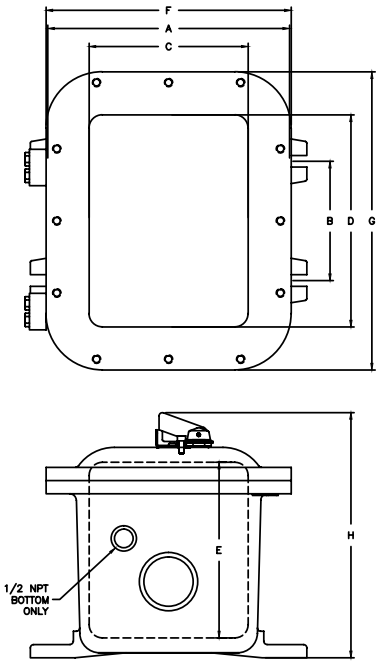

FIGURE NO. 8

KT4 Manual Motor Starter

DISCONTINUED

Ideal for use as a manual starter

The KT4 is a manual motor starter that employs the features of power switching, thermal overload protection and control circuit signaling in one compact unit. This manual motor starter has the advantage of a high speed magnetic trip mechanism which limits the let-through current under short-circuit conditions. The KT4 can be supplied with field installable shunt trip or an under voltage trip unit which exceeds the capabilities of the classic manual motor starter. This manual motor starter is available in a variety of enclosures including general purpose, watertight and explosion proof (the most compact on the market today).

KT4 Reduces panel space and saves money in Group Motor Installations

The KT4 can eliminate the need for larger and more expensive fuse blocks and fused disconnects, or circuit breakers. The potential cost savings in group motor installations according NEC 430-53c can be as much as 35% over conventional methods of branch circuit protection. And, because so many features are combined into one small unit, panel space can be slashed by as much as 60%.

In addition, the KT4 line offers a wide application range from 0.1 to 16 FLA in installations up to 600V. For group motor applications, the KT4 series has a 250A group installation rating, with a withstand rating as high as 42 KAIC.

Excellent short circuit and thermal overload protection

In the event of a short-circuit, the contacts are opened by magnetic, non-adjusting tripping elements in times approaching 2/1000 of a second. This results in the extremely rapid build-up of an arc voltage which limits the current of the short-circuit to a very low level. Because of this superb current limiting capability the let-through current is significantly reduced and the potential for damage is limited.

Because each KT4 is individually calibrated at the factory for the smallest and largest current, very accurate thermal overload protection is also obtained. In addition, the KT4 is a Class 10 device ... it trips within 10 seconds under a locked rotor condition (6 x FLA). Every KT4 Manual Motor Starter is equipped with automatic ambient temperature compensation, which continually adjusts to surrounding temperatures. As a result, trip times remain constant and accurate.

Accessories add versatility

Whether in group motor installations or as a manual motor starter, numerous field installable accessories are available to enhance the KT4's performance:

- **Auxiliary Contact Blocks** – are available for internal or external mounting providing signal switching capability for control circuits.
- **Shunt trip and Undervoltage Release Modules** – provides the ability to remotely actuate the KT4 in emergency situations or continuously monitor the line voltage.
- **Enclosures** – are available in general protection (IP41), or watertight (IP55), complete with lockable accessories.
- **Compact Bus Bar System** – reduces the task of line side wiring in multiple motor starter installations which reduces the labor cost of installation.

KT4 Manual Motor Starter ❶

Maximum Horsepower ❶❷						O/L Relay Ampere Response ❹	Magnetic Response Current	Ordering Information ❶	
Single Ø ❷		Three Ø							
115V	230V	200V	230V	460V	575V			Catalog Number	Price
~	~	~	~	~	~	0.1 - 0.16	1.8	**KT4-C2A-A16**	**200.05**
~	~	~	~	~	~	0.16 - 0.25	2.8	**KT4-C2A-A25**	**200.05**
~	~	~	~	~	~	0.25 - 0.4	4.4	**KT4-C2A-A40**	**200.05**
~	~	~	~	~	~	0.4 - 0.63	6.9	**KT4-C2A-A63**	**229.07**
~	~	~	~	~	1/2	0.63 - 1.0	11	**KT4-C2A-B10**	**229.07**
~	1/10	~	~	1/2	3/4	1.0 - 1.6	18	**KT4-C2A-B16**	**229.07**
1/10	1/6	1/2	1/2	1	1-1/2	1.6 - 2.5	28	**KT4-C2A-B25**	**229.07**
1/8	1/3	3/4	3/4	2	3	2.5 - 4.0	44	**KT4-C2A-B40**	**229.07**
1/4	1/2	1	1-1/2	3	5	4.0 - 6.3	69	**KT4-C2A-B63**	**229.07**
1/2	1-1/2	2	3	5	7-1/2	6.3 - 10	110	**KT4-C2A-C10**	**229.07**
1	2	3	5	10	10	10 - 16	176	**KT4-C2A-C16**	**262.24**

Short Circuit Ratings ❸

Catalog Number	Manual Motor Starter / Group Installation Ratings		
	Short Circuit Rating (kA)		Maximum Branch Circuit Protection Rating ❺
	480V	600V	Amperes
KT4-C2A-A16	42	42	250
KT4-C2A-A25	42	42	250
KT4-C2A-A40	42	42	250
KT4-C2A-A63	42	42	250
KT4-C2A-B10	42	42	250
KT4-C2A-B16	42	42	250
KT4-C2A-B25	42	10	250
KT4-C2A-B40	18	5	250
KT4-C2A-B63	18	5	250
KT4-C2A-C10	10	5	250
KT4-C2A-C16	10	5	250

❶ Horsepower ratings shown are the maximum rating of the switching capacity of the main contactors. **The final selection of the manual starter depends on the actual motor full load amps and service factor.**

Example #1:
For a motor with a service factor of 1.15 or greater, use the motor nameplate full load amps and choose the motor starter with the appropriate current range.

Motor F.L.A.		4.2A
Service Factor		1.15

Select catalog number KT4-C2A-A63 (Range 4.0-6.3 Amps)

Example #2:
For a motor with a service factor less than 1.15, use the motor nameplate full load amps times 0.9 and choose the motor starter with the appropriate current range.

Motor F.L.A.		4.2A
Service Factor		1.0
Multiplier	x	0.9
Effective Current	=	3.78A

Select catalog number KT4-C2A-A40 (Range 2.5-4.0 Amps)

❷ Single phase horsepower ratings are based on wiring the 3 poles of the device in series.

❸ The KT4 motor circuit controller is approved for use in group installation according to NEC 430-53C. Reference Sprecher+Schuh UL file #E54612.

❹ The actual trip current is 120% of the dial setting.

❺ Although UL Testing of Manual Motor Starters allows for Group Installation with upstream Branch Circuit Protection maximum ratings as high as 250 amperes; it should be noted that NEC 2002 contains new restrictions under NEC 430-53D "Single Motor Taps". KT4 should be applied as outlined in NEC 430-53D-1 or 430-53-D-2 to be in compliance. KT4 does not qualify as "Tap Conductor Protection" as required under NEC 430-53-D-3. Please refer to the Application notes located at the end of the KT7 section for more details on compliance.

Accessories for KT4

Accessory	Description	Wiring Diagram	Catalog Number	Price
	Auxiliary Contact Block (NO) - mounts internally.		**KT4-C-AEA10**	**22.80**
	Auxiliary Contact Block (NO) - mounts internally, terminal markings appropriate when also using "PA" type auxiliary contact.		**KT4-C-AEA210**	**22.80**
	Auxiliary Contact Block (NC) - mounts internally.		**KT4-C-AEA01**	**22.80**
	Auxiliary Contact Block (NC) - mounts internally, terminal markings appropriate when also using "PA" type auxiliary contact.		**KT4-C-AEA201**	**22.80**
	**Two pole Auxiliary Contact Block (NO/NC) -** for side mounting. If using Compact Bus Bar System, choose bus bar with 54mm spacing		**KT4-C-ASA11**	**42.49**
	Two pole Auxiliary Contact Block - (NO/NO) - for side mounting. If using Compact Bus Bar System, choose bus bar with 54mm spacing.		**KT4-C-ASA20**	**42.49**
	Two pole Auxiliary Contact Block - (NC/NC) - for side mounting. If using Compact Bus Bar System, choose bus bar with 54mm spacing.		**KT4-C-ASA02**	**42.49**

Accessory	Description	Catalog Number	Price
	Adaptor Plate Provides capability to base mount one KT4	**KT4-C-N12**	**17.62**
	Locking Fixture Padlocking attachment for one KT4-25. Locks in the OFF position only. Metal construction. Holds one to three padlocks with 6mm hasps.	**KT4-C-M3**	**17.62**

Accessories for KT4 *(continued from previous page)*

Accessory	Description	Wiring Diagram	AC Coil Voltage		Catalog Number	Price
			50 HZ	60 HZ		
	Undervoltage Release Module - mounts on right hand side, Prevents KT4 from operating unless voltage is present.		24V	~	**KT4-C-UXK**	**100.54**
			~	24V	**KT4-C-UXJ**	
			~	48V	**KT4-C-UXX**	
			110V	110V	**KT4-C-UXKD**	
			110V	**120V**	**KT4-C-UXD**	
			220…230V	240…260V	**KT4-C-UXF**	
			~	240…260V	**KT4-C-UXA**	
			240V	277V	**KT4-C-UXT**	
			400V	460V	**KT4-C-UXN**	
			415V	**480V**	**KT4-C-UXB**	
			500V	575V	**KT4-C-UXM**	
	Shunt Release Module - mounts on right hand side. Remotely trips the KT4 .		24V	~	**KT4-C-SXK**	**100.54**
			~	24V	**KT4-C-SXJ**	
			~	48V	**KT4-C-SXX**	
			110V	110V	**KT4-C-SXKD**	
			110V	120V	**KT4-C-SXD**	
			220…230V	240…260V	**KT4-C-SXF**	
			~	240…260V	**KT4-C-SXA**	
			240V	277V	**KT4-C-SXT**	
			400V	460V	**KT4-C-SXN**	
			415V	480V	**KT4-C-SXB**	
			500V	575V	**KT4-C-SXM**	

Accessory	Description	Voltage / Rated Current	Catalog Number	Price
	Connecting Module ❶- Provides a solid "wireless" connection between a KT4 Motor Circuit Controller and a CA7 contactor. Connects CA7-9…23	20A	**KT4-C-PNC23**	**18.66**

❶ cULus Approved (File E33916).

Accessories for KT4 *(continued from previous page)*

Accessory	Description	Enclosure Rating	Catalog No. ❶	Price
KT4-C-EA55	**Enclosures for Surface Mounting** - Includes ground and neutral terminals.	General Purpose (IP41)	**KT4-C-EA41**	**75.67**
		Watertight (IP55)	**KT4-C-EA55**	**134.75**
KT4-C-EE55	**Enclosure for Flush Mounting** - includes protective earth and neutral wire terminals.	General Purpose (IP41)	**KT4-C-EE41**	**42.49**
		Watertight (IP55)	**KT4-C-EE55**	**52.86**
	**Enclosure Locking Fixture** - Holds one to three padlocks with 6mm hasps.	For use with KT4-C-EA41 and KT4-C-EA55 enclosures	**KT4-C-M3E**	**17.62**
	Enclosure Membrane - Replacement membrane. Includes 4 mounting screws (membrane only, does not include mounting frame).	For replacement on KT4-C-EA55 or -EE55 or to upgrade KT4-C-EA41 or -EE41 enclosures	**KT4-C-N55**	**8.81**

Accessory	Description	Kit Catalog No.	Kit Price	For Use With	Assembled Cat No. ❶	Price
KT4-C-MT-EA55	**Emergency Stop Kit Twist-To-Release**	**KT4-C-MT**	**47.68**	KT4-C-EA41	**KT4-C-MT-EA41**	**135.78**
				KT4-C-EE41	**KT4-C-MT-EE41**	**103.65**
				KT4-C-EA55	**KT4-C-MT-EA55**	**199.01**
				KT4-C-EE55	**KT4-C-MT-EE55**	**111.95**
KT4-C-MK-EA55	**Emergency Stop Kit Key Release**	**KT4-C-MK**	**76.70**	KT4-C-EA41	**KT4-C-MK-EA41**	**164.81**
				KT4-C-EE41	**KT4-C-MK-EE41**	**132.68**
				KT4-C-EA55	**KT4-C-MK-EA55**	**229.07**
				KT4-C-EE55	**KT4-C-MK-EE55**	**140.96**

❶ KT4 Manual Motor Starter Not Included. Consult a Sprecher + Schuh representative for an assembly including a KT4.

Compact Bus Bar System for KT4

Accessory	Description	Catalog Number	Price
	**Compact Bus Bar - 45mm spacing** - Bus bar with 45mm spacing accepts KT4's with *or without* internally mounted auxiliary or trip signal contact. Rated to 65A (UL)/63A (IEC).		
	Connects two KT4's	**KT4-C-W452**	**41.46**
	Connects three KT4's	**KT4-C-W453**	**47.68**
	Connects four KT4's	**KT4-C-W454**	**53.89**
	Connects five KT4's	**KT4-C-W455**	**59.08**
	**Compact Bus Bar - 54mm spacing** - Bus bar with 54mm spacing accepts KT4's with side mounted auxiliary contact (type PA-11). Rated to 65A (UL)/63A (IEC).		
	Connects two KT4's	**KT4-C-W542**	**41.46**
	Connects three KT4's	**KT4-C-W543**	**47.68**
	Connects four KT4's	**KT4-C-W544**	**53.89**
	Connects five KT4's	**KT4-C-W545**	**59.08**
	Supply Block - Provides connection from bus bar to power.	**KT4-C-WT**	**38.35**
	Blank Space Cover - Covers bus bar connections where no KT4 is mounted.	**KT4-C-WS**	**6.22**

Technical Information

		KT4…
Standards Approvals		UL 508; CSA22.2; EN/IEC 60947-1/-2/-4/-5-1/ UL, CSA, CE, SEV, Germ. Lloyd, CEBEC, PTB, DEMKO, SEMKO, SETI, NEMKO, Bureau Veritas, Lloyd's Register of Shipping, Maritime Register of Shipping, RINA, KEMA
Approvals / Markings		CE, cULus Listed
Rated Insulation Voltage		
IEC, SEV, VDE0660	[V]	690
UL, CSA	[V]	600
Rated Impulse Withstand Voltage		
Main circuits		6 kV
Auxiliary circuits		6 kV
Rated Frequency	[Hz]	40…60
Rated Operating Current	[A]	0.1…16 (11 ranges)
Life		
Mechanical	[operations]	100,000
Electrical	[operations]	50,000
Switching Frequency		Max. 30 operating cycles/hour
Ambient Temperature		
Storage		-25°C to +80°C
Operation		-25°C to +60°C
Resistance to climatic change		
Humid heat		40°C, 92%, 56 days
Alternating climatic conditions		23°C, 83%/40°C, 93%, 56 cycles
Degree of Protection		IP20 (when wired)
Impact Resistance (shock)		50g, 11ms
Vibration Strength		
Frequency Range		10…150Hz
In all directions		>7.5g
Overload Protection		
Tripping Time		Class 10
Phase failure protection		See time/current curve
Temperature Compensation		-20°C… +60°C (70°C=15% current reduction of upper rated current)
Magnetic Response		11 x *I*e max. (fixed setting) (*I*e max. = max value of the setting range)
Total Power dissipation		
Manual motor starter at rated load	[W]	7
Terminal Connections		
Type of terminals		
Screwdriver		Position [illegible] Blade No. 3
	1. conductor	1 to 4 mm² / 16 to 12 AWG
	2. conductor	1 to 4 mm² / 16 to 12 AWG
	1. conductor	1 to 6 mm² / 16 to 12 AWG
	2. conductor	1 to 6 mm² / 16 to 12 AWG
	1. conductor	1.5 to 6 mm² / 16 to 12 AWG
	2. conductor	1.5 to 6 mm² / 16 to 12 AWG
Tightening torque		2 to 2.5 Nm / 18 to 22 fb-in

Mounting Position - KT4

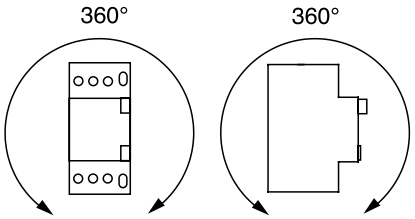

Weights

Description	Catalog Number	Weight
Manual Motor Starter	KT4-C2A...	290 g
Auxiliary Contact Blocks for Flush Mounting	KT4-C-AEA	12 g
Auxiliary Contact Blocks for Left-side Mounting	KT4-C-ASA	35 g
Undervoltage Release	KT4-C-UX	104 g
Shunt Release	KT4-C-SX	100 g
Bus Bar Feeder Terminal	KT4-C-WT	36 g
Compact Bus Bar	KT4-C-W452	42 g
	KT4-C-W453	69 g
	KT4-C-W454	94 g
	KT4-C-W455	119 g
	KT4-C-W542	45 g
	KT4-C-W543	76 g
	KT4-C-W545	104 g
	KT4-C-W545	135 g
Blank Space Cover	KT4-C-WS	3.3 g
Emergency-Stop Push Button	KT4-C-MT	g
	KT4-C-MK	g
Enclosure for Surface Mounting	KT4-C-EA41	250 g
Enclosure for Flush Mounting	KT4-C-EA55	258 g
Button Membrane	KT4-C-EE41	126 g
	KT4-C-EE55	134 g
Indicator Light	KT4-L...	10 g
Hut (DIN) rail Adapter	KT4-C-N12	16 g
	KT4-C-M3E	19 g
Locking Arrangement	KT4-C-M3	11 g

Technical Information

Specifications of Accessories		KT4-C-AEA... Auxiliary Contact Block for Flush Mounting				KT4-C-ASA... Auxiliary Contact Block for Left-side Mounting			
Rated Thermal Current I_{th}									
at 40°C ambient temperature	[A]	6				10			
at 60°C ambient temperature	[A]	4				6			
Contact Class Coordination According to NEMA									
(UL/CSA Standards)	[AC]	B 600 Standard Pilot Duty				B 600 Standard Pilot Duty			
	[DC]	R 300 Light Pilot Duty				R 300 Light Pilot Duty			
Back-Up Fuses gG, gL	**[A]**	**16**				**16**			
Rated Supply current	[V]	230/240	400/415	500	690	230/240	400/415	500	690
AC-15	[A]	2	1	0.8	0.5	2	1	0.8	0.5
DC-13	[V]	24	48	110	220	24	48	110	220
	[A]	2	0.6	0.2	0.1	2	0.6	0.2	0.1
Terminal Parts Type of terminals									
Screwdriver		Pozidrive No. 2 / Blade No. 3							
 1. conductor		0.75 to 2.5 mm2 / 18 to 14 AWG				0.75 to 2.5 mm2 / 18 to 14 AWG			
2. conductor		0.75 to 2.5 mm2 / 18 to 14 AWG				0.75 to 2.5 mm2 / 18 to 14 AWG			
1. conductor		0.75 to 4 mm2 / 18 to 14 AWG				0.75 to 4 mm2 / 18 to 14 AWG			
2. conductor		0.75 to 4 mm2 / 18 to 14 AWG				0.75 to 4 mm2 / 18 to 14 AWG			
1. conductor		0.75 to 4 mm2 / 18 to 14 AWG				0.75 to 4 mm2 / 18 to 14 AWG			
2. conductor		0.75 to 4 mm2 / 18 to 14 AWG				0.75 to 4 mm2 / 18 to 14 AWG			
Tightening torque		1 to 1.5 Nm / 9 to 13 fb-in				1 to 1.5 Nm / 9 to 13 fb-in			

		KT4-C-UX... Undervoltage Release Unit for Right-side Mounting	KT4-C-SX... Shunt Release for Right-side Mounting	KT4-C-WT Supply Block
Actuating Voltage				
Pull-in		0.8 to 1.1 x U_s	0.7 to 1.1 x U_s	
Drop-out		0.7 to 0.35 x U_s	~	
Rated Control Voltage	min.	12V 50 Hz, 14V 60 Hz	12V 50 Hz, 14V 60 Hz	
	max.	600V 50 Hz	600V 50 Hz	
On-Time		100 %	100%	
Coil Rating	Pull-in	8.5 VA, 6 W	8.5 VA, 6 W	
	Hold	3 VA, 1.2 W	3 VA, 1.2 W	
Terminal Parts Type of terminals				
Screwdriver		Pozidrive No. 2/Blade No. 3	Pozidrive No. 2/Blade No. 3	Pozidrive No. 2/Blade No. 3
 1. conductor		0.75 to 2.5 mm² / 18 to 14 AWG	0.75 to 2.5 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
2. conductor		0.75 to 2.5 mm² / 18 to 14 AWG	0.75 to 2.5 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
1. conductor		0.75 to 4 mm² / 18 to 14 AWG	0.75 to 4 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
2. conductor		0.75 to 4 mm² / 18 to 14 AWG	0.75 to 4 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
1. conductor		0.75 to 4 mm² / 18 to 14 AWG	0.75 to 4 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
2. conductor		0.75 to 4 mm² / 18 to 14 AWG	0.75 to 4 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
Tightening torque		1 to 1.5 Nm / 9 to 13 fb-in	1 to 1.5 Nm / 9 to 13 fb-in	4 Nm / 36 fb-in

		KT4-C-W45... Compact Bus Bar	KT4-C-W54... Compact Bus Bar
Rated Insulation Voltage U_i	[V]	690	690
Rated Thermal Current I_{th}	[A}	63	63

		KT4-C-EA41 / -EE41 Enclosure	KT4-C-EA55 / -EE55 Enclosure	KT4-C-L... Indicator Light
IP Protection		IP41	IP55 (with seal and protective membrane)	IP54
Ambient Temperature	[°C]	- 25...+ 40	- 25...+ 40	~
Rated Operating Voltage	[V]	~	~	120, 240, 415, 480

IEC Performance Data (KT4-C2A)

		-A16	-A25	-A40	-A63	-B10	-B16	-B25	-B40	-B63	-C10	-C16
Switching of standard three phase motors												
AC-2, AC-3												
230/240V	[kW]	~	~	~	0.06/0.09	0.12	0.18/0.25	0.37	0.55/0.75	1.1/1.5	2.2	3.0/4.0
400/415V	[kW]	0.02	0.06	0.09	0.18/.25	0.25	0.37/0.55	.75	1.1/1.5	2.2	3.0/4.0	5.5/7.5
500V	[kW]	~	~	~	0.18	0.25/0.37	0.55/0.75	1.1	1.5/2.2	2.5/3.0	4.0/6.3	7.5/10
690V	[kW]	~	~	~	0.25	0.37/0.55	0.75/1.1	1.8	2.2/3.0	~	~	~
Back-up fuses												
gG, aM, only if /cc > /cu												
230/240V	[A]	No Fuses Required						~	~	~	~	50
400/415V	[A]							~	~	~	63	50
500V	[A]							~	~	63	50	50
690V	[A]							25	35	~	~	~
Ultimate short-circuit breaking capacity /cu												
230/240V	[kA]	65	65	65	65	65	65	50	50	50	50	3
400/415V	[kA]	65	65	65	65	65	65	50	10	10	8	6
500V	[kA]	50	50	50	50	50	50	50	3	10	4.5	4.5
690V	[kA]	50	50	50	50	50	50	4.5	2	~	~	~

CSA Performance Data (KT4-C2A)

		-A16	-A25	-A40	-A63	-B10	-B16	-B25	-B40	-B63	-C10	-C16
Maximum short-circuit current												
480V	[kA]	42	42	42	42	42	42	42	18	18	10	5
600V	[kA]	42	42	42	42	42	42	10	5	5	5	5
Motor load												
1-phase												
115V	[HP]	~	~	~	~	~	~	1/10	1/8	1/4	1/2	1
230V	[HP]	~	~	~	~	~	1/10	1/6	1/3	3/4	1 1/2	3
3-phase												
200V	[HP]	~	~	~	~	~	~	1/2	3/4	1 1/2	2	3
230V	[HP]	~	~	~	~	~	~	3/4	1	2	3	5
460V	[HP]	~	~	~	~	1/2	1	1 1/2	3	5	7 1/2	10
575V	[HP]	~	~	~	~	3/4	1	2	3	5	10	15

Auxiliary Contact & Trip Indicator Contact Development ❶

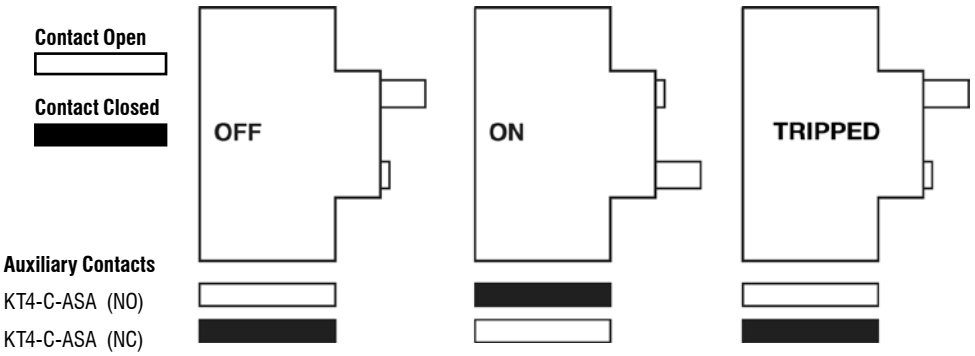

❶ KT4 leaves the factory in the Auto Reset mode. This means the Off and Trip positions are the same. If a true trip position is required, consult your Sprecher + Schuh representative.

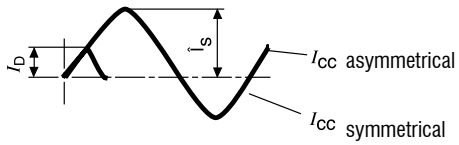

KT4-C2A
Max. Let-Through (cut-off) Current, U_e = 400...415V

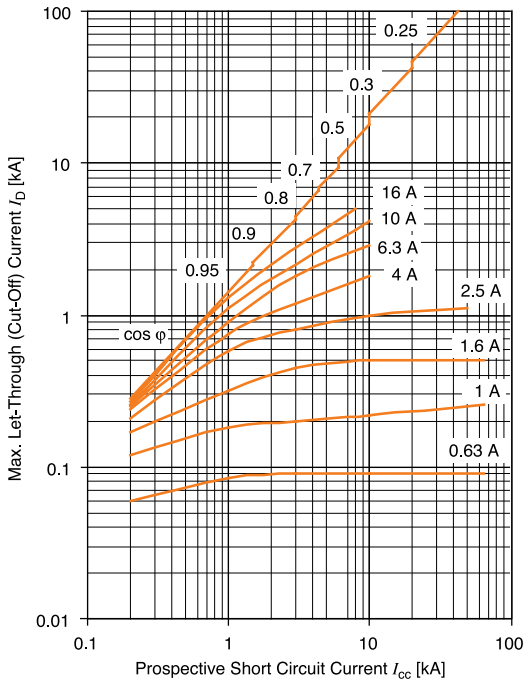

KT4-C2A
Time / current characteristics

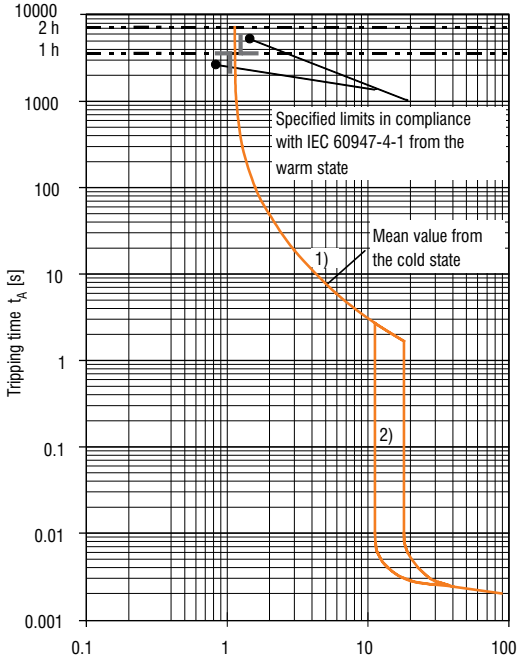

The KT4-C2A manual motor starter limits short-circuit current I_{cc} (prospective short-circuit current). I_D is the maximum cut-off current (highest instantaneous value of the limited short-circuit current). This value is indicated in the following diagram as a function of the system short-circuit current.

Correspondingly the maximum forward j^2 dt energy is limited. This value is indicated in the following diagram as a function of the system short-circuited current.

KT4-C2A
Max. Let-Through Energy, U_e = 400...415V

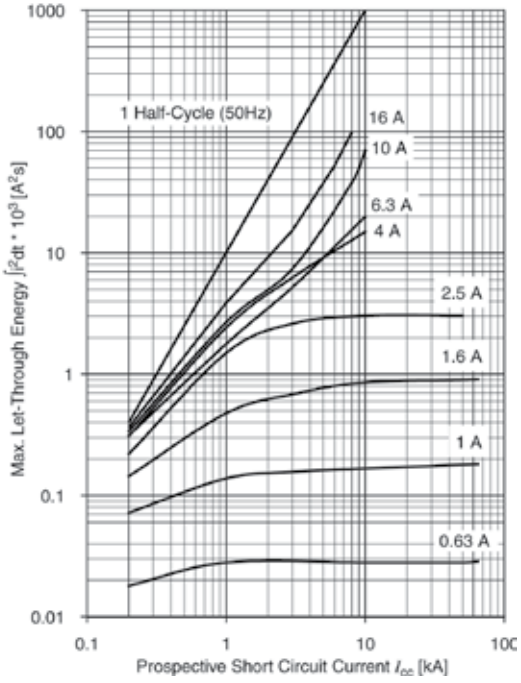

1) Operating Current of Thermal Releases:

The adjustable inverse bimetal trip reliability protects motors against overloads. The curve shows the mean operating current at an ambient temperature of 20°C starting from cold.

In equipment at operating temperature, release time is less than or equal to release time from the cold state.

2) Operating Current of Magnetic Releases:

Electromagnetic instantaneous releases react at a fixed tripping current.

At the upper thermal release setting, this tripping current is 11 times the set cur rent.

Current To Be Set:

Thermal releases meet the requirements for a thermal release of a starter in accordance with IEC 60947-4-1 f. If a different value is specified (such as reduced I_e in motors with an ambient temperature higher than 40°C or a site altitude >2000 m above sea level), the rated operating current I_e must be adjusted.

Single, Two and Three Phase Connection Diagram

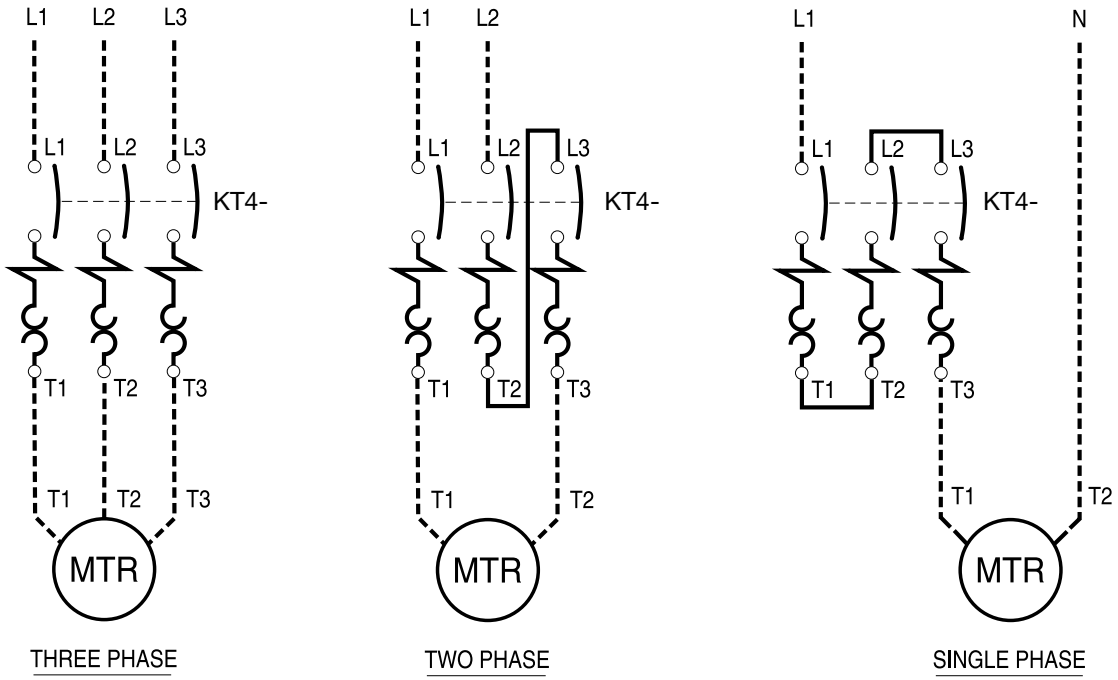

Dimensions are in millimeters (except where noted). Dimensions not intended for manufacturing purposes.

KT4 Motor Circuit Controller

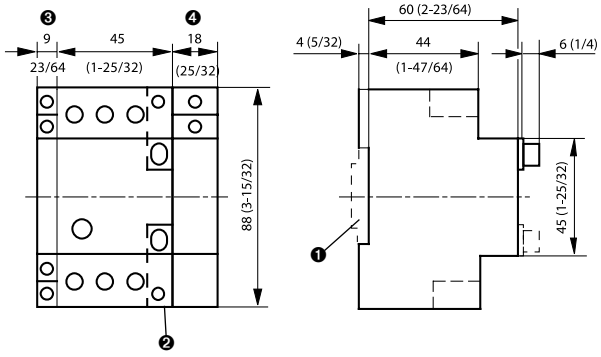

KT4 with Compact Bus Bar

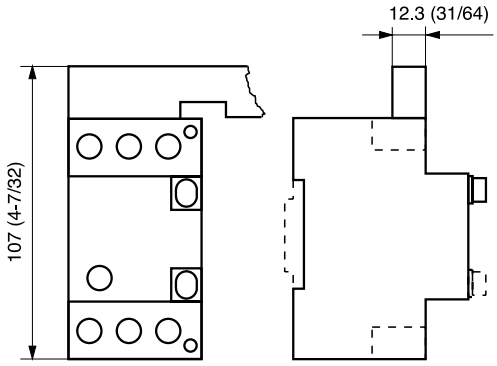

❶ DIN rail (EN 50022-35)
❷ KT4 w/KT4-C-AEA (no dimension change)
❸ KT4-C-ASA
❹ KT4-C-SXB or KT4-C-UXA

KT4-C-WT

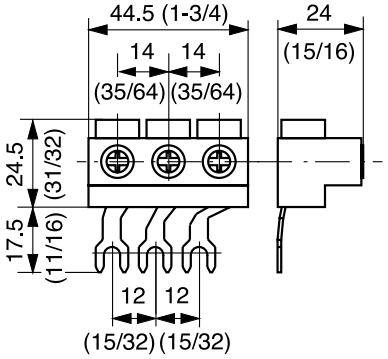

KT4-C2A with KT4-C-WT

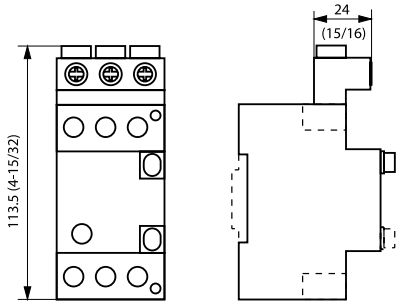

KT4-C-N12



KT4-C-EA55 Enclosure

Dimensions are in millimeters (except where noted). Dimensions not intended for manufacturing purposes.

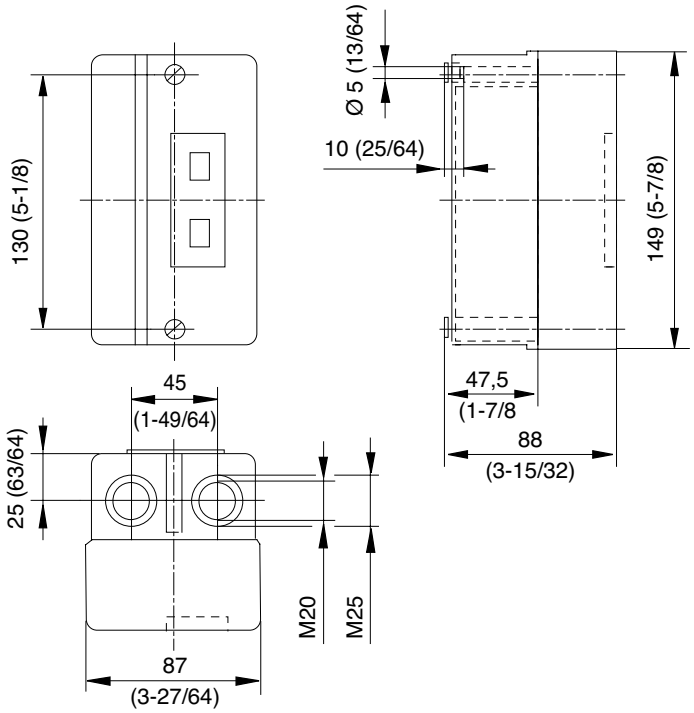

KT4-C-EE41 Enclosure

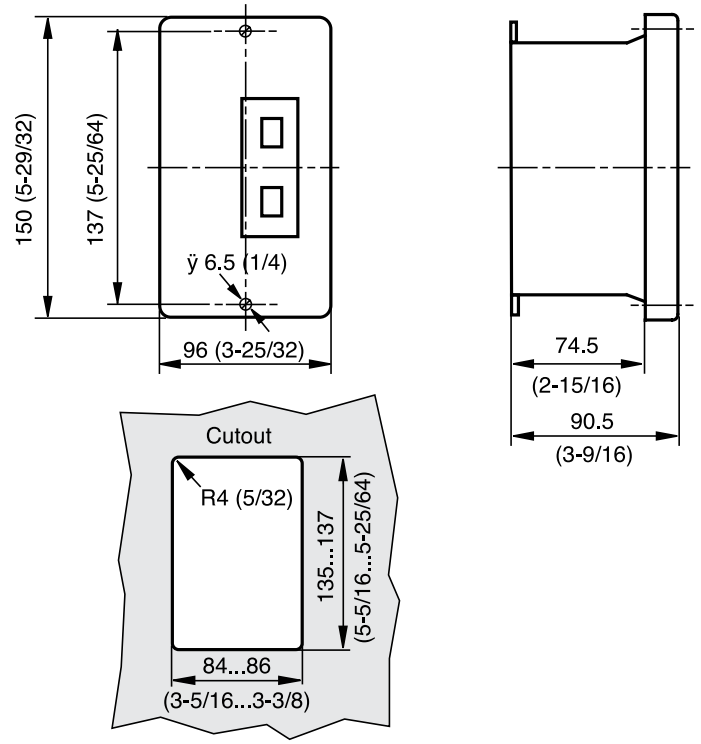

Notes