



REX POWER MAGNETICS

A DIVISION OF TRANSFACTOR INDUSTRIES INC.
65 BASALTIC RD, CONCORD, ON, CA L4K 1G4
TEL: 905-695-8844 • FAX: 905-695-8855
WWW.REXPOWERMAGNETICS.COM

TRANSFORMER SPECIFICATION

- 3 Phase Auto
- Dry Type
- ANN -Self cooled

Purchaser: TBA
PO#: TBA
SWO#: TBA
Qty: TBA

Coils: Copper
Cat. No.: RC15J-H

kVA: 15
Primary: 600 Volts
Secondary: 480 Volts

Frequency: 60 Hz

Insulation Class: 180° C
Temperature Rise: 115° C

Weight: 115 Lbs

Termination	Location	Terminals
Primary:	Front	Terminal Blocks
Secondary:	Front	Terminal Blocks

Wiring Connection:

Primary:
Voltage 600
Connect Lines To: H1-H2-H3

Secondary:
Voltage 480
Connect Loads To: X1-X2-X3

Preliminary Drawing ONLY


This drawing may NOT truly reflect our final design.
Any resulting order(s) must be accompanied by or
refer to this drawing and be marked with any
proposed changes

Standards:

1. CSA Certified
 - File No. LR34493
2. UL Listed
 - File No. E108255


Standard Features:

1. Anti-vibration pads installed between the enclosure base and the core & coil assembly
2. Lug for Earth Grounding provided




CSA Enclosure:

- Type 1 (NEMA 1)
- Ventilated
- ASA 61 grey
- Floor mounting

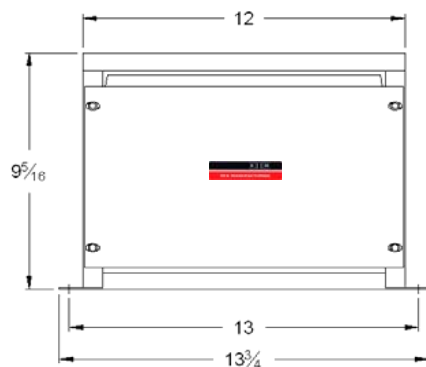

FRONT VIEW



SIDE VIEW

Rev.	Remarks	By	Appr. By	Date

Prepared by: AP
Approved by: VS
Date: AUG.13, 2013
X:\Drawings\WEB DWG\2013\3Ph\Auto\RC...J-H.xls