



REX POWER MAGNETICS

A DIVISION OF TRANSFACTOR INDUSTRIES INC.
65 BASALTIC RD, CONCORD, ON, CA L4K 1G4
TEL: 905-695-8844 • FAX: 905-695-8855
WWW.REXPOWERMAGNETICS.COM

TRANSFORMER SPECIFICATION

- 3 Phase Auto
- Dry Type
- ANN -Self cooled

Purchaser: TBA
PO#: TBA
SWO#: TBA
Qty: TBA

Coils: Copper
Cat. No.: RC225J-H

kVA: 225
Primary: 600 Volts
Secondary: 480 Volts

Frequency: 60 Hz

Insulation Class: 220° C
Temperature Rise: 150° C

Weight: 381 Lbs

Termination	Location	Lug Size
Primary:	Front	300MCM-6
Secondary:	Front	600MCM-2

Wiring Connection:

Primary:
Voltage 600
Connect Lines To: H1-H2-H3

Secondary:
Voltage 480
Connect Loads To: X1-X2-X3

Preliminary Drawing ONLY



This drawing may NOT truly reflect our final design.
Any resulting order(s) must be accompanied by or
refer to this drawing and be marked with any
proposed changes

Standards:

1. CSA Certified
 - File No. LR34493
2. UL Listed
 - File No. E108255

Standard Features:

1. Anti-vibration pads installed between the enclosure base and the core & coil assembly
2. Lug for Earth Grounding provided

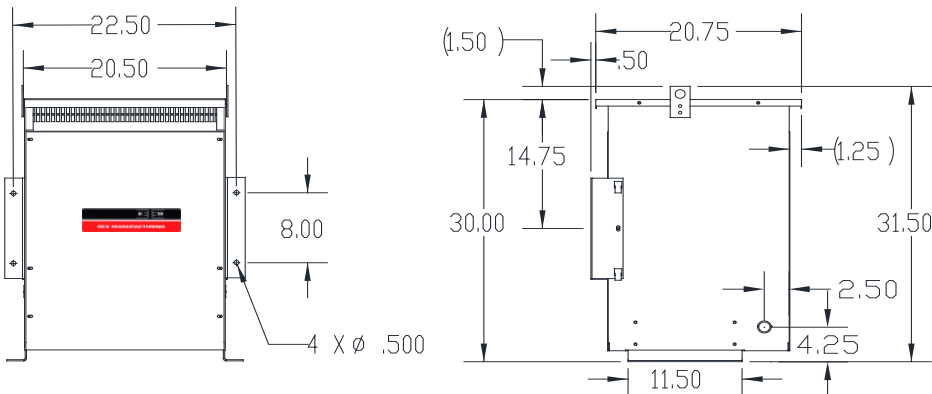

CSA Enclosure:

1. Type 3R (NEMA 3R)
 - Sprinklerproof when the angle between sprinkler heads and opening in the enclosure does not exceed 45° from the vertical.
2. Ventilated
3. ASA 61 grey
4. Floor/Wall mounting

1	Enclosure Size Revised	AP	V.S	April 1,2019
Rev.	Remarks	By	Appr. By	Date

Prepared by: AP
Approved by: VS
Date: AUG.13, 2013

X:\Drawings\WEB DWG\2013\3Ph\Auto\RC...J-H.xls