



REX POWER MAGNETICS

A DIVISION OF TRANSFACTOR INDUSTRIES INC.
65 BASALTIC RD, CONCORD, ON, CA L4K 1G4
TEL: 905-695-8844 FAX: 905-695-8855
WWW.REXPOWERMAGNETICS.COM

TRANSFORMER SPECIFICATION

- 3 Phase Auto
- Dry Type
- ANN -Self cooled

Purchaser: TBA
PO#: TBA
SWO#: TBA
Qty: TBA

Preliminary Drawing ONLY
This drawing may NOT truly reflect our final design.
Any resulting order(s) must be accompanied by or
refer to this drawing and be marked with any
proposed changes

Coils: Copper
Cat. No.: RC3J-H
kVA: 3
Primary: 600 Volts
Secondary: 480 Volts
Frequency: 60 Hz
Insulation Class: 180° C
Temperature Rise: 115° C
Weight: 42 Lbs

Table with 3 columns: Termination, Location, Terminals. Rows for Primary and Secondary.

Wiring Connection:

Primary: Voltage 600 Connect Lines To: H1-H2-H3



Secondary: Voltage 480 Connect Loads To: X1-X2-X3

Standards:

- 1. CSA Certified - File No. LR34493
2. UL Listed - File No. E108255

Standard Features:

- 1. Anti-vibration pads installed between the enclosure base and the core & coil assembly
2. Lug for Earth Grounding provided

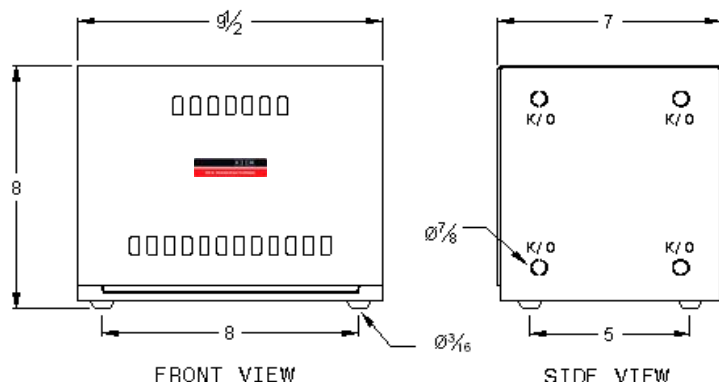

CSA Enclosure:

- Type 1 (NEMA 1)
- Ventilated
- ASA 61 grey
- Floor mounting

Table with 5 columns: Rev., Remarks, By, Appr. By, Date.

Prepared by: AP
Approved by: VS
Date: AUG.13, 2013
X:\Drawings\WEB DWG\2013\3Ph\Auto\RC...J-H.xls